



Configuração do Access Point


DIR-600

DIR-600



Procedimentos para configurar o Access Point

1-Para realizar o procedimento de configuração em modo Access Point você deve estar conectado via cabo Ethernet à porta LAN do DIR-600 e este deve estar ligado a energia.

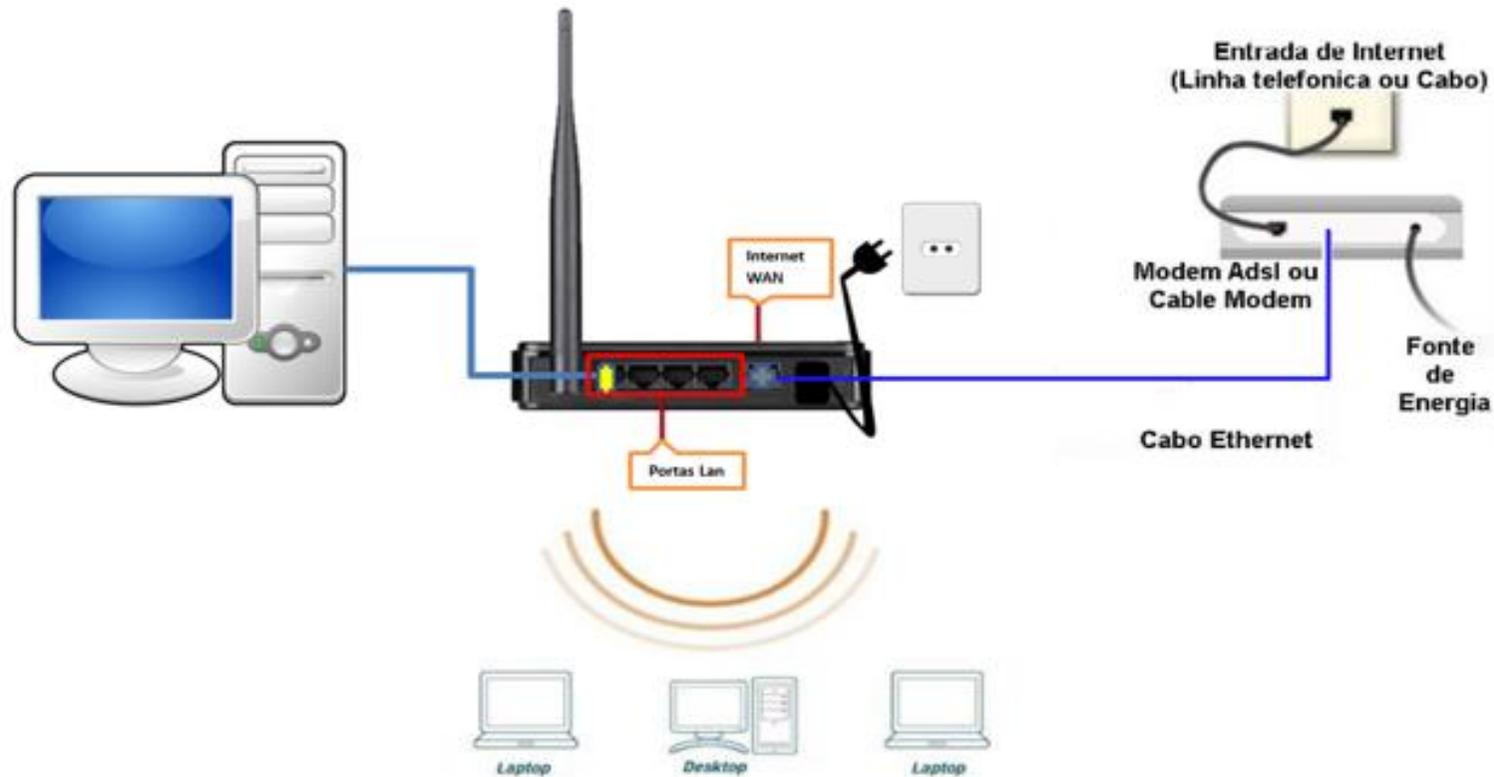

Obs.: Para realizar estes procedimentos não é necessário estar conectado à internet.

2- Para acessar a página de configuração abra o navegador de internet, digite na barra de endereços <http://192.168.0.1> e tecla **Enter**.



Será apresentada a tela de autenticação para acesso a página de configuração.

A screenshot of a web browser displaying the login page for a D-Link wireless router. The page has an orange header with the word "LOGIN" in white. Below the header, it says "Log in to the router:". There are two input fields: "User Name" with "admin" entered, and "Password" which is empty. Below the password field, there is a CAPTCHA image showing the characters "HTDMF" in a stylized font. A red box highlights the word "below." in the text "Enter the correct password above and then type the characters you see in the picture below." To the right of the CAPTCHA image is a "Regenerate" button. At the bottom of the form is a "Log In" button.

O usuário e senha padrão do equipamento são:

Nome de Usuário: Admin

Senha: *(deixe em branco)*

Confirme os caracteres no campo Below

Clique em **Login**.

3-Clique em **Setup >> Wireless Setup** em seguida **Manual Wireless Connection Setup** no final da página.

The screenshot displays the D-Link DIR-600 web interface. At the top, it shows 'Product Page : DIR-600', 'Hardware Version : B1', and 'Firmware Version : 2.00'. The D-Link logo is prominently displayed. Below the logo, there is a navigation bar with tabs for 'DIR-600', 'SETUP 1', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'SETUP 1' tab is highlighted with a red box. On the left side, there is a sidebar menu with options: 'Internet Setup', 'Wireless Setup 2', 'LAN Setup', 'Time and Date', 'Parental Control', and 'Logout'. The 'Wireless Setup 2' option is highlighted with a red box. The main content area is titled 'WIRELESS CONNECTION' and contains the following text: 'There are 2 ways to setup your wireless connection. You can use the Wireless Connection Setup Wizard or you can manually configure the connection.' Below this, there is a note: 'Please note that changes made in this section will also need to be duplicated on your wireless clients and PCs.' The section is divided into two parts: 'WIRELESS CONNECTION SETUP WIZARD' and 'MANUAL WIRELESS CONNECTION OPTIONS'. The 'WIRELESS CONNECTION SETUP WIZARD' section includes a button labeled 'Wireless Connection Setup Wizard' and a note: 'Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.' The 'MANUAL WIRELESS CONNECTION OPTIONS' section includes a button labeled 'Manual Wireless Connection Setup 3', which is highlighted with a red box. On the right side, there is a 'Helpful Hints..' section with two bullet points: '• If you are new to wireless networking and have never configured a wireless router before, click on **Wireless Connection Setup Wizard** and the router will guide you through a few simple steps to get your wireless network up and running.' and '• If you consider yourself an advanced user and have configured a wireless router before, click **Manual Wireless Connection Setup** to input all the settings manually.'

4- Campo 1: **deixe desmarcado**

Wireless Network Name: **Insira o nome para a rede sem fio, Ex.: (Teste)**

Product Page : DIR-600 Hardware Version : B1 Firmware Version : 2.00

D-Link

DIR-600 // SETUP ADVANCED MAINTENANCE STATUS HELP

Internet Setup
Wireless Setup
LAN Setup
Time and Date
Parental Control
Logout

WIRELESS NETWORK

Use this section to configure the wireless settings for your D-Link router. Please note that changes made in this section may also need to be duplicated on your wireless client.

To protect your privacy you can configure wireless security features. This device supports three wireless security modes including: WEP, WPA and WPA2.

Save Settings Don't Save Settings

WI-FI PROTECTED SETUP (ALSO CALLED WCN 2.0 IN WINDOWS VISTA)

Enable : **1**

Current PIN : **96459393**

Generate New PIN Reset PIN to Default

Wi-Fi Protected Status : Enabled / Configured

Reset to Unconfigured

Add Wireless Device with WPS

WIRELESS NETWORK SETTINGS

Enable Wireless : Always

Wireless Network Name : teste **2** (Also called the SSID)

Enable Auto Channel Selection :

Wireless Channel : 6

Transmission Rate : Best (automatic) (Mbit/s)

WMM Enable : (Wireless QoS)

Enable Hidden Wireless : (Also called the SSID Broadcast)

Helpful Hints..

- Wi-Fi Protected Setup provides a more intuitive way of setting up wireless security between the router and the wireless client. Make sure the wireless card supports this feature or uses a certified Windows Vista driver in order to take advantage of this feature.
- Changing your Wireless Network Name is the first step in securing your wireless network. We recommend that you change it to a familiar name that does not contain any personal information.
- Enabling Hidden Mode is another way to secure your network. With this option enabled, no wireless clients will be able to see your wireless network when they perform a scan to see what's available. In order for your wireless devices to connect to your router, you will need to manually enter the Wireless Network Name on each device.
- If you have enabled Wireless Security, make sure you write down the WEP Key or Passphrase that you have configured. You will need to enter this

5- Criando senha para Rede Sem Fio.

Security Mode: Selecione **Enable WPA/WPA2 Wireless Security (enhanced)**

Cipher Type: Selecione **AES**

Network Key: **(Crie uma senha para sua rede sem fio). Mínimo 8 Caracteres**

Clique no botão **“Save Settings”**

WIRELESS NETWORK SETTINGS

Enable Wireless : Always

Wireless Network Name : teste (Also called the SSID)

Enable Auto Channel Selection :

Wireless Channel : 6

Transmission Rate : Best (automatic) (Mbit/s)

WMM Enable : (Wireless QoS)

Enable Hidden Wireless : (Also called the SSID Broadcast)

WIRELESS SECURITY MODE

Security Mode : **Enable WPA/WPA2 Wireless Security (enhanced)** 1

WPA/WPA2

WPA/WPA2 requires stations to use high grade encryption and authentication.

Cipher Type : **AES** 2

PSK / EAP : PSK

Network Key : 3
(8~63 ASCII or 64 HEX)

4



6- Em Setup >> Internet Setup, logo após clique em Manual Internet Connection Setup

Product Page : DIR-600 Hardware Version : B1 Firmware Version : 2.00

D-Link

DIR-600 // SETUP 1 ADVANCED MAINTENANCE STATUS HELP

Internet Setup 2
Wireless Setup
LAN Setup
Time and Date
Parental Control
Logout

INTERNET CONNECTION

If you are configuring the device for the first time, we recommend that you click on the Internet Connection Setup Wizard button and follow the instructions on the screen. If you wish to modify or configure the device settings manually, click the Manual Internet Connection Setup button.

INTERNET CONNECTION SETUP WIZARD

If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Router to the Internet, click on the button below.

Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

MANUAL INTERNET CONNECTION OPTIONS

If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.

Helpful Hints..

- If you are new to networking and have never configured a router before, click on **Internet Connection Setup Wizard** and the router will guide you through a few simple steps to get your network up and running.
- If you consider yourself an advanced user and have configured a router before, click **Manual Internet Connection Setup** to input all the settings manually.

7- Habilite a opção Enable Access Point Mode Save Settings

D-Link

DIR-600 // SETUP ADVANCED MAINTENANCE STATUS HELP

Internet Setup
Wireless Setup
LAN Setup
Time and Date
Parental Control
Logout

INTERNET CONNECTION

Use this section to configure your Internet Connection method. There are several connection methods to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, Russian PPTP(Dual Access) and Russian PPPoE(Dual Access). If you are unsure of your connection method, please contact your Internet Service Provider.

Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

ACCESS POINT MODE

Use this to disable NAT on the router and turn it into an Access Point.

Enable Access Point Mode 4

Helpful Hints..

- **Internet Connection:** When configuring the router to access the Internet, be sure to choose the correct **Internet Connection Type** from the drop down menu. If you are unsure of which option to choose, please contact your **Internet Service Provider (ISP)**.
- **Support:** If you are having trouble accessing the Internet through the router, double check any settings you have entered on this page and verify them with your ISP if needed.

Após a configuração, conecte o cabo do “Roteador, Switch ou Modem” na porta “Internet” do DIR-600.

