



Configuração de Internet - Modo IP Dinâmico

DIR-905L

DIR-905L



Procedimentos para configuração de Internet - Modo IP Dinâmico


- 1- Para realizar o procedimento de configuração em modo **Dynamic**, o computador deve estar conectado via cabo Ethernet em uma das portas **LAN** do DIR-905L, e o seu Modem ADSL conectado na porta **Internet** do DIR-905L.



2- Para acessar a página de configuração abra o Internet Explorer, digite na barra de endereços <http://192.168.0.1> e tecla **Enter**.



No centro da tela abrirá os campos para autenticação.

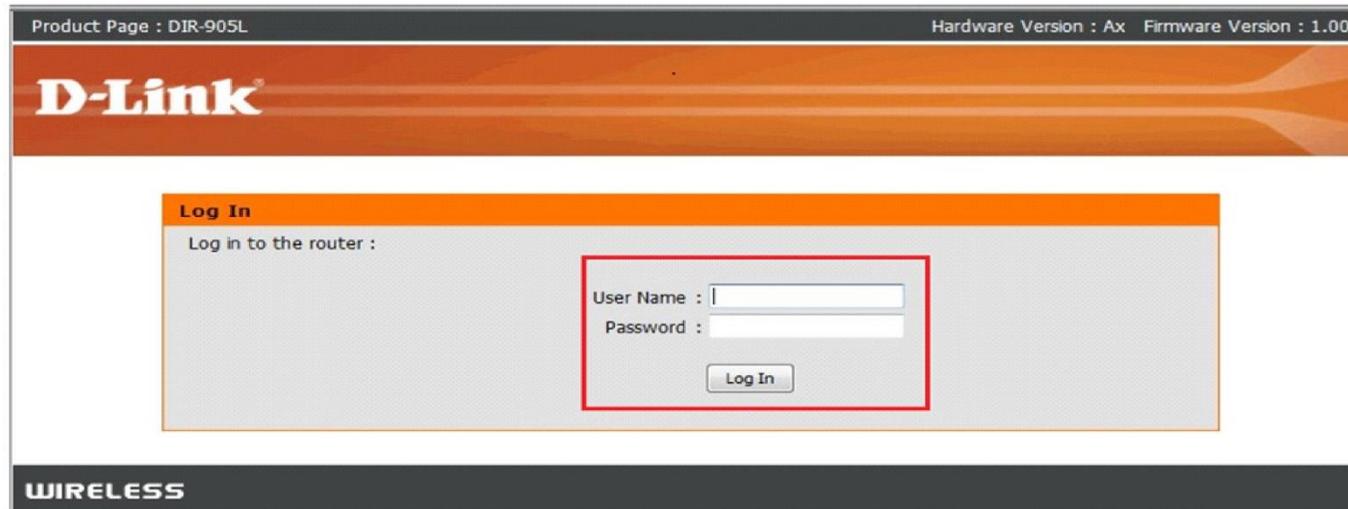

O usuário e senha padrão do equipamento é:

User Name: admin

Password: (deixe em branco)

Clique apenas em **Log In**.

3- Clique em **Setup Manual**.

CURRENT NETWORK SETTING

The current network settings and the connection status are displayed below. If you want to reconfigure your wireless settings, please click the "Configure" button. You can also enter advanced settings by clicking "Manual Setup".

Internet Settings

Internet Connection : PPPoE Status : **Connected**

Wireless Settings

Network Name (SSID) : DIR-905L Status : **Encryption** [Configure](#)
Security : Auto (WPA or WPA2) - Personal
Network Key : MydlinkMydlink

Device Info

User Name : admin
Password : Mydlink

mydlink Account

You have not activated mydlink service. Status : **Not Connected** [Configure](#)

Save my network settings

[Cancel](#) [Manual Setup](#) [Save](#)

3- Clique nas abas **SETUP** > **Internet Connection** e altere os seguintes campos:

My Internet Connection is: Dynamic IP (DHCP)

Host Name: (não altere)

MAC Address: Clique no botão **Copy Your PC's MAC Address**

Clique em **Save Settings** e em seguida em **Reboot Now**.

The image displays two screenshots of a D-Link router's web management interface.

Top Screenshot (DIR-900L): The 'SETUP' tab is active, and the 'Internet Connection' menu item is highlighted. The main content area is titled 'INTERNET CONNECTION' and contains instructions for configuring the connection type. A dropdown menu is set to 'Dynamic IP (DHCP)'. Below this, the 'DYNAMIC IP (DHCP) INTERNET CONNECTION TYPE' section is visible, showing fields for Host Name (DIR-905L), MAC Address (00 - 00 - 00 - 00 - 00 - 00), Primary DNS Server (0.0.0.0), Secondary DNS Server (0.0.0.0), and MTU (1500). A button labeled 'Copy Your PC's MAC Address' is highlighted. 'Save Settings' and 'Don't Save Settings' buttons are also present.

Bottom Screenshot (DIR-905L): The 'SETUP' tab is active, and a 'REBOOT NEEDED' message is displayed. The message states: 'Your changes have been saved. The router must be rebooted for the changes to take effect. You can reboot now, or you can continue to make other changes and reboot later.' Two buttons, 'Reboot Now' and 'Reboot Later', are visible at the bottom of the message box.

Após concluído o **Reboot**, irá voltar para a página inicial. Para confirmar a conexão, clique na aba **STATUS > Device Info** e verifique na faixa **Internet** o campo **IP Address**:

Product Page : DIR-905L Hardware Version : Ax Firmware Version : 1.00

D-Link

DIR-905L // SETUP ADVANCED MAINTENANCE **STATUS** HELP

Device Info

DEVICE INFORMATION

All of your Internet and network connection details are displayed on this page. The firmware version is also displayed here.

Firmware Version : 1.00, Fri 09 Mar 2012

LAN

MAC Address : BC:F6:85:3E:F5:30
IP Address : 192.168.0.1
Subnet Mask : 255.255.255.0
DHCP Server : Enabled

INTERNET

MAC Address : A4:BA:DB:06:4C:CF
Dynamic Connected
Connection :
IP Address : 187.75.180.142
Subnet Mask : 255.255.255.255
Default Gateway : 201.92.100.194
DNS : 200.204.0.10
200.204.0.138

WIRELESS 802.11N

SSID : DIR-905
Channel : 2
Encryption : Disabled

WIRELESS

Helpful Hints...
All of your WAN and LAN connection details are displayed here.
More...

