



Configuração de Internet - Modo IP Estático


DIR-905L

DIR-905L




Procedimentos para configuração de Internet - Modo IP Estático

- 1- Para realizar o procedimento de configuração em modo **Static**, o computador deve estar conectado via cabo Ethernet em uma das portas **LAN** do DIR-905L, e o seu Modem ADSL conectado na porta **Internet** do DIR-905L.

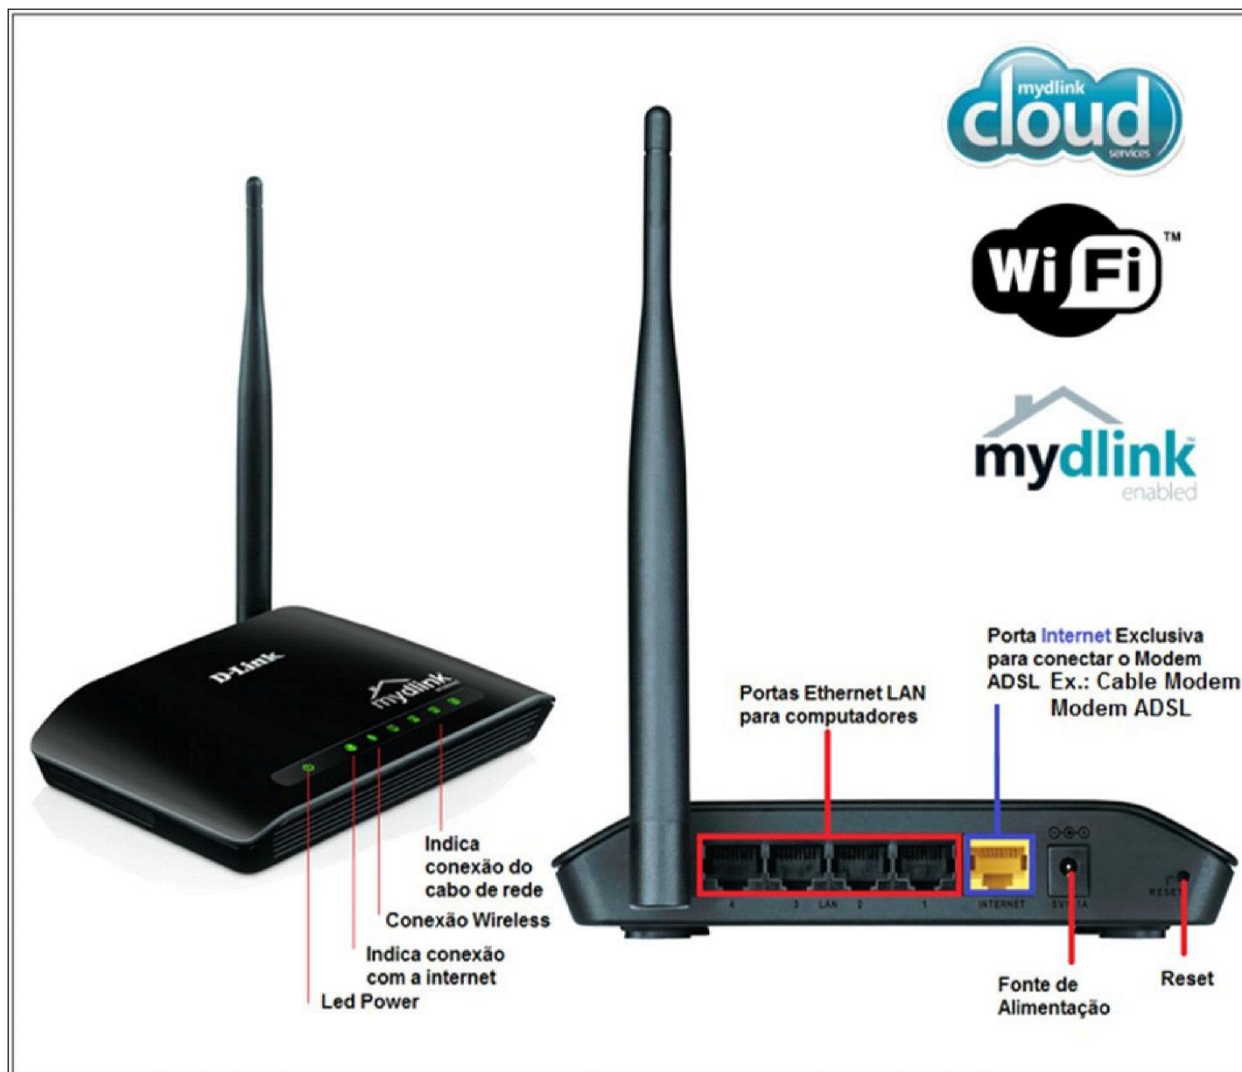

2- Para acessar a página de configuração abra o Internet Explorer, digite na barra de endereços <http://192.168.0.1> e tecla **Enter**.

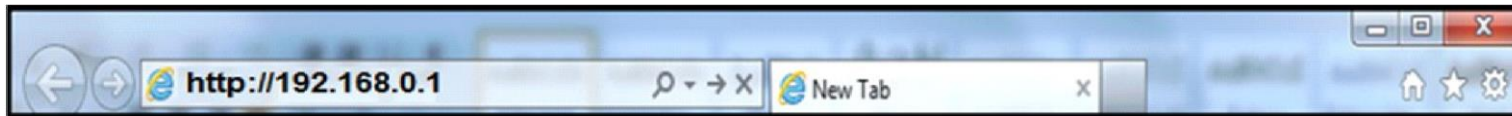

No centro da tela abrirá os campos para autenticação.

A screenshot of the D-Link DIR-905L router configuration page. The page has a dark grey header with "Product Page : DIR-905L" on the left and "Hardware Version : Ax Firmware Version : 1.00" on the right. Below the header is a large orange banner with the "D-Link" logo. The main content area is white and contains a "Log In" section. The "Log In" section has an orange header with the text "Log In" and "Log in to the router :". Below this, there is a login form with two input fields: "User Name :" and "Password :". A red rectangular box highlights the "User Name" and "Password" fields and the "Log In" button. The "Log In" button is a small grey button with the text "Log In". At the bottom of the page, there is a dark grey footer with the word "WIRELESS" in white capital letters.

O usuário e senha padrão do equipamento é:

User Name: admin

Password: (deixe em branco)

Clique apenas em **Log In**.

3- Clique em **Setup Manual**.

Product Page : DIR-905L Hardware Version : Ax Firmware Version : 1.00

D-Link®

CURRENT NETWORK SETTING

The current network settings and the connection status are displayed below. If you want to reconfigure your wireless settings, please click the "Configure" button. You can also enter advanced settings by clicking "Manual Setup".

Internet Settings

Internet Connection : Dynamic IP (DHCP) Status : **Disconnected**

Wireless Settings

Network Name (SSID) : DIR-905 Status : **Unsecured** [Configure](#)

Security : Disabled

Your current wireless security settings are not safe. We recommend you configure wireless settings.

Device Info

User Name : admin

Password :

mydlink Account

You have not activated mydlink service. Status : **Not Connected** [Configure](#)

☐ Save my network settings

[Cancel](#) [Manual Setup](#) [Save](#)

WIRELESS

4- Clique nas abas **Setup > Internet Connection** e altere os seguintes parâmetros:

My Internet Connection is: **Static IP**

IP Address: **digite o endereço IP fornecido por sua operadora.**

Subnet Mask: **digite a máscara de sub-rede fornecida por sua operadora.**

Default Gateway: **digite o gateway padrão fornecido por sua operadora.**

MAC Address: **Clique no botão Copy Your PC's MAC Address.**

Primary DNS Server: **digite o DNS fornecido por sua operadora.**

Secondary DNS Server: **digite o DNS secundário fornecido por sua operadora (opcional)**

Clique em **Save Settings**

Product Page : DIR-905L Hardware Version : A1 Firmware Version : 1.00

D-Link

DIR-905L

SETUP ADVANCED MAINTENANCE STATUS HELP

Easy Setup
Internet Connection
 Wireless Connection
 Lan Setup
 Time and Date
 Parental Control Rules
 Logout

INTERNET CONNECTION

Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, and L2TP. If you are unsure of your connection method, please contact your Internet Service Provider.

Note : If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

Save Settings Don't Save Settings

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is : Static IP

STATIC IP ADDRESS INTERNET CONNECTION TYPE

Enter the static address information provided by your Internet Service Provider (ISP).

IP Address : 10.1.1.5
 Subnet Mask : 255.0.0.0
 Default Gateway : 10.1.1.1
 MAC Address : 00 - 00 - 00 - 00 - 00 - 00 (optional)
 Copy Your PC's MAC Address
 Primary DNS Server : 10.1.1.1
 Secondary DNS Server : 0.0.0.0 (optional)
 MTU : 1500 bytes MTU default 1500


Helpful Hints ...

When configuring the router to access the Internet, be sure to choose the correct **Internet Connection Type** from the drop down menu. If you are unsure of which option to choose, contact your **Internet Service Provider (ISP)**.

If you are having trouble accessing the Internet through the router, double check any settings you have entered on this page and verify them with your ISP if needed.

More...

5- Clique em **Reboot Now**.

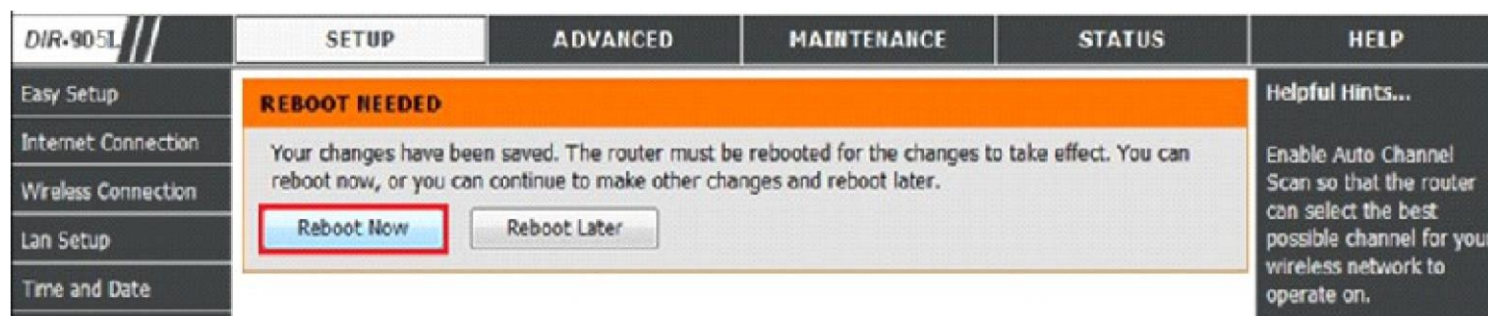

Após concluído o **Reboot**, irá voltar para a página inicial. Para confirmar a conexão, clique na aba **STATUS > Device Info** e verifique na faixa **Internet** o campo **IP Address**:



