



Configuração de Internet - Modo PPPoE

**DIR-905L**

## DIR-905L




## Procedimentos para configuração de Internet - Modo PPPoE

- 1- Para realizar o procedimento de configuração em modo **PPPoE**, o computador deve estar conectado via cabo Ethernet em uma das portas **LAN** do DIR-905L, e o seu Modem ADSL conectado na porta **Internet** do DIR-905L.



2- Para acessar a página de configuração abra o Internet Explorer, digite na barra de endereços <http://192.168.0.1> e tecla **Enter**.



No centro da tela abrirá os campos para autenticação.

A screenshot of the D-Link DIR-905L router configuration page. The page has a dark grey header with "Product Page : DIR-905L" on the left and "Hardware Version : Ax Firmware Version : 1.00" on the right. Below the header is a large orange banner with the "D-Link" logo. The main content area is white and contains a "Log In" section. The "Log In" section has an orange header with the text "Log In" and a grey box below it with the text "Log in to the router :". Inside the grey box, there are two input fields: "User Name : " and "Password : ". A "Log In" button is located below the input fields. The entire "Log In" section is highlighted with a red rectangular border. At the bottom of the page, there is a dark grey footer with the word "WIRELESS" in white.

O usuário e senha padrão do equipamento é:

**User Name:** admin

**Password:** (deixe em branco)

Clique apenas em **Log In**.

### 3- Clique em **Setup Manual**.

Product Page : DIR-905L Hardware Version : Ax Firmware Version : 1.00

# D-Link®

## CURRENT NETWORK SETTING

The current network settings and the connection status are displayed below. If you want to reconfigure your wireless settings, please click the "Configure" button. You can also enter advanced settings by clicking "Manual Setup".

**Internet Settings**

Internet Connection : Dynamic IP (DHCP) Status : **Disconnected**

**Wireless Settings**

Network Name (SSID) : DIR-905 Status : **Unsecured** [Configure](#)

Security : Disabled

Your current wireless security settings are not safe. We recommend you configure wireless settings.

**Device Info**

User Name : admin

Password :

**mydlink Account**

You have not activated mydlink service. Status : **Not Connected** [Configure](#)

☐ Save my network settings

[Cancel](#) [Manual Setup](#) [Save](#)

## WIRELESS

4- Clique nas abas **Setup > Internet Connection** e altere os seguintes parâmetros:

My Internet Connection is: **PPPoE (Username/Password)**

No campo PPPoE marque **Dynamic IP (DHCP)**

**User Name:** digite o usuário fornecido pelo seu provedor de acesso.

**Password:** digite a senha fornecida pelo seu provedor de acesso.

**Confirm Password:** Repita a senha informada acima.


Clique em **Clone Your PC's MAC Address**

Connection mode select: **Always**

The screenshot displays the 'INTERNET CONNECTION' configuration page for a D-Link DIR-905L router. The left sidebar contains navigation links: Easy Setup, Internet Connection, Wireless Connection, Lan Setup, Time and Date, Parental Control Rules, and Logout. The main content area is divided into two sections. The top section, 'INTERNET CONNECTION', provides instructions on choosing a connection type (Static IP, DHCP, PPPoE, PPTP, L2TP) and includes a 'Note' about PPPoE client software. It features a 'Save Settings' button. The bottom section, 'PPPoE', prompts the user to enter ISP information. It includes radio buttons for 'Dynamic IP (DHCP)' (selected) and 'Static IP'. Fields for 'User Name' (peuemai@seuprovedor), 'Password' (masked), 'Confirm Password' (masked), 'Service Name' (optional), 'IP Address' (0.0.0.0), 'MAC Address' (00-00-00-00-00-00, optional), 'Primary DNS Server' (0.0.0.0), 'Secondary DNS Server' (0.0.0.0, optional), 'Maximum Idle Time' (5 minutes), and 'MTU' (1492 bytes) are present. A 'Copy Your PC's MAC Address' button is highlighted. The 'Connection mode select' dropdown is set to 'Always'. At the bottom, there are 'Save Settings' and 'Don't Save Settings' buttons.



5- Clique em **Save Settings** e em seguida clique em **Reboot Now**.

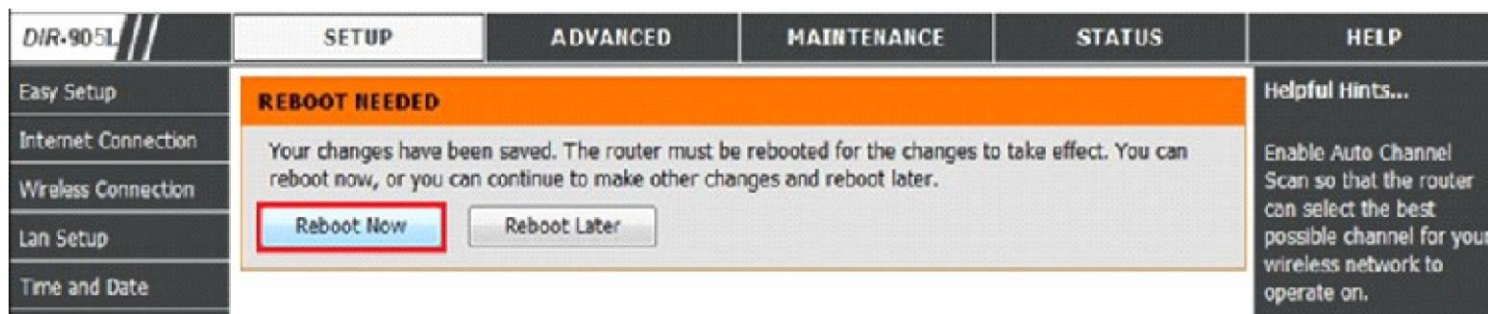

Após concluído o **Reboot**, irá voltar para a página inicial. Para confirmar a conexão, clique na aba **STATUS > Device Info** e verifique na faixa **Internet** o campo **IP Address**:

