



User Manual

AC1750 High Power Gigabit Wireless Router

DIR-859

Preface

D-Link reserves the right to revise this publication and to make changes in the content hereof without obligation to notify any person or organization of such revisions or changes.

Manual Revisions

Revision	Date	Description
1.00	October 15, 2015	Initial release
1.01	November 17, 2015	A3 revision

Trademarks

D-Link and the D-Link logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States or other countries. All other company or product names mentioned herein are trademarks or registered trademarks of their respective companies.

Apple®, Apple logo®, Safari®, iPhone®, iPad®, iPod touch® and Macintosh® are trademarks of Apple Inc., registered in the U.S. and other countries. App StoreSM is a service mark of Apple Inc. ChromeTM browser, Google PlayTM and AndroidTM are trademarks of Google Inc. Internet Explorer®, Windows® and the Windows logo are trademarks of the Microsoft group of companies.

Copyright © 2015 by D-Link Corporation, Inc. All rights reserved. This publication may not be reproduced, in whole or in part, without prior expressed written permission from D-Link Corporation, Inc.

Power Usage

This device is an Energy Related Product (ErP) with High Network Availability (HiNA), and automatically switches to a power-saving Network Standby mode within 1 minute of no packets being transmitted. It can also be turned off through a power switch to save energy when it is not needed.

Network Standby: 3.5 watts

Switched Off: 0.2 watts

Table of Contents


Product Overview	1	Internet.....	50
Package Contents.....	1	Wireless	53
System Requirements	2	Guest Zone	55
Introduction	3	Network.....	56
Features.....	4	Advanced	58
Hardware Overview	5	QoS Engine.....	58
Connections	5	Firewall Settings.....	59
LEDs	6	IPv4/IPv6 Rules	61
Installation	7	Port Forwarding	62
Before you Begin.....	7	Website Filter.....	63
Wireless Installation Considerations.....	8	Static Routes.....	64
Wall Mounting	9	IPv6	65
Manual Setup.....	10	Dynamic DNS	66
Getting Started	12	IPv6 Host	67
Setup Wizard	13	Management.....	68
QRS Mobile App.....	17	Time & Schedule	68
Configuration.....	22	Time	68
Home	23	Schedule	69
Internet.....	23	System Log.....	70
DIR-859	24	Admin	71
Connected Clients	25	System	72
Settings	26	Upgrade	73
Wizard	26	Statistics	74
Internet.....	26	Connect a Wireless Client to your Router	75
IPv6	35	WPS Button.....	75
		Windows® 8.....	76

WPA/WPA2	76
Windows® 7.....	78
WPA/WPA2	78
WPS.....	81
Windows Vista®	85
WPA/WPA2	86
Windows® XP.....	88
WPA/WPA2	89
Troubleshooting	91
Wireless Basics	95
What is Wireless?	96
Tips.....	98
Wireless Modes.....	99
Networking Basics	100
Check your IP address	100
Statically Assign an IP address	101
Wireless Security	102
What is WPA?	102
Technical Specifications	103
Regulatory Information	104

Package Contents



DIR-859 AC1750 High Power Gigabit Wireless Router



Ethernet Cable



Power Adapter



Wi-Fi Configuration Note

If any of the above items are missing, please contact your reseller.

Note: Using a power supply with a different voltage rating than the one included with the DIR-859 will cause damage and void the warranty for this product.

System Requirements

Network Requirements	<ul style="list-style-type: none">• An Ethernet-based cable or DSL modem• 802.11ac, n, g, b, or a wireless or Ethernet port
Web-based Configuration Utility Requirements	<p>Computer with the following:</p> <ul style="list-style-type: none">• Windows®, Macintosh, or Linux-based operating system• An installed Ethernet adapter <p>Browser Requirements:</p> <ul style="list-style-type: none">• Internet Explorer® 9 or higher• Firefox® 20 or higher• Safari 5.1 or higher• Chrome™ 25 or higher <p>Windows® Users: Make sure you have the latest version of Java installed. Visit www.java.com to download the latest version.</p>

Introduction

The D-Link DIR-859 AC1750 High Power Gigabit Wireless Router uses advanced AC technology to maximize the speed and range of your wireless signal to significantly outperform 802.11n and other 802.11ac devices. It also comes equipped with four Gigabit ports to provide speeds up to 10x faster than standard 10/100 ports. With the addition of advanced Quality of Service (QoS), data streams are separated, which helps organize and prioritize your network traffic so your video streaming, gaming, and VoIP calls run smoother over both your wired and wireless network.

The DIR-859 supports convenient set up options including QRS Mobile, which allows you to setup and configure the router using a mobile app. You can set up your router right from your sofa, no PC required. Add in an easy-to-use web interface and configuring your network is a quick and simple affair.

The DIR-859 AC1750 High Power Gigabit Wireless Router provides incredible speeds, Gigabit ports, mobile setup, and terrific security features. To top it all off, the router has a stylish and innovative design and easy installation options.


Features

- **Faster Wireless Networking** - The DIR-859 uses advanced AC to provide up to a full 1750 Mbps* wireless connection with concurrent 801.11ac and 802.11n wireless clients . It also operates on both the 2.4 GHz and 5 GHz bands to allow separation of traffic so users can participate in high-bandwidth activities, such as video streaming, online gaming, and real-time audio, without affecting low-priority traffic like email and web surfing.
- **Set Up On Your Mobile** - The DIR-859 supports the QRS Mobile app to let you set up the router using a mobile device.
- **Compatible with 802.11n/g/b/a Devices** - The DIR-859 is still fully compatible with the 802.11n, IEEE 802.11g and 802.11a standards, so it can connect with existing 802.11n, 802.11g, 802.11b, and 802.11a wireless devices.
- **Advanced Firewall Features** - The web-based user interface displays a number of advanced network management features including:
 - **Content Filtering** - Easily applied content filtering based on MAC address, URL, and/or domain name.
 - **Filter Scheduling** - These filters can be scheduled to be active on certain days, or for a duration of hours or minutes.
 - **Secure Multiple/Concurrent Sessions** - The DIR-859 can pass through VPN sessions. It supports multiple and concurrent IPsec and PPTP sessions, so users behind the DIR-859 can securely access corporate networks.
- **User-friendly Setup Wizard** - Through its easy-to-use web-based user interface, the DIR-859 lets you control what information is accessible to those on the wireless network, whether from the Internet, or from your company's server. Configure your router to your specific settings within minutes.

* Maximum wireless signal rate derived from IEEE Standard 802.11a, 802.11b, 802.11g, and 802.11n specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental conditions will adversely affect wireless signal range.

Hardware Overview


Connections

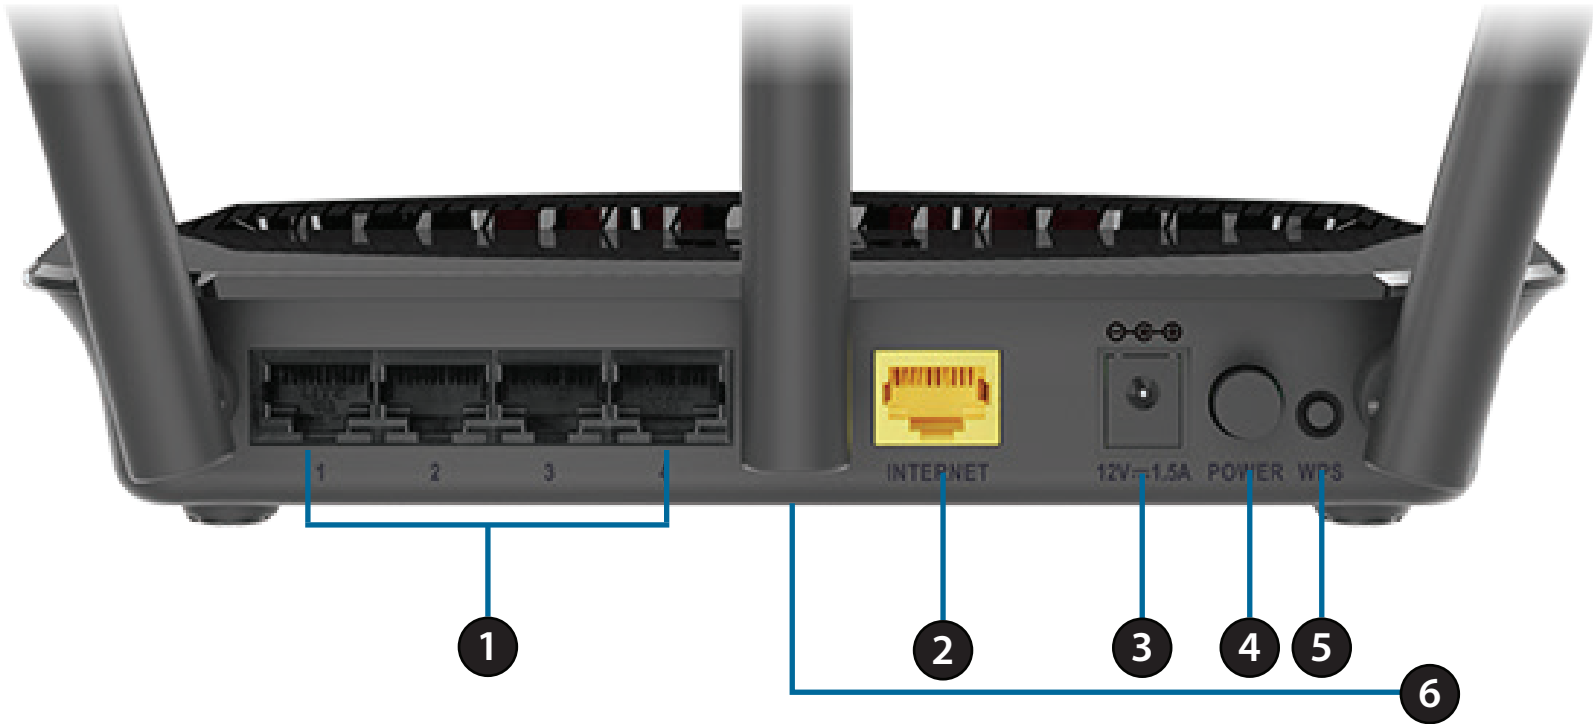

1	LAN Ports (1-4)	Connect Ethernet devices such as computers, switches, storage (NAS) devices and game consoles.
2	Internet Port	Using an Ethernet cable, connect your broadband modem to this port.
3	Power Receptor	Connect the supplied power adapter to supply power to the device.
4	Power Button	Press the button to power on the device.
5	WPS Button	Press this button to initiate WPS with supported client devices.
6	Reset Button	Insert a paperclip into the hole and hold for several seconds to reset the router to default settings.

Hardware Overview

LEDs

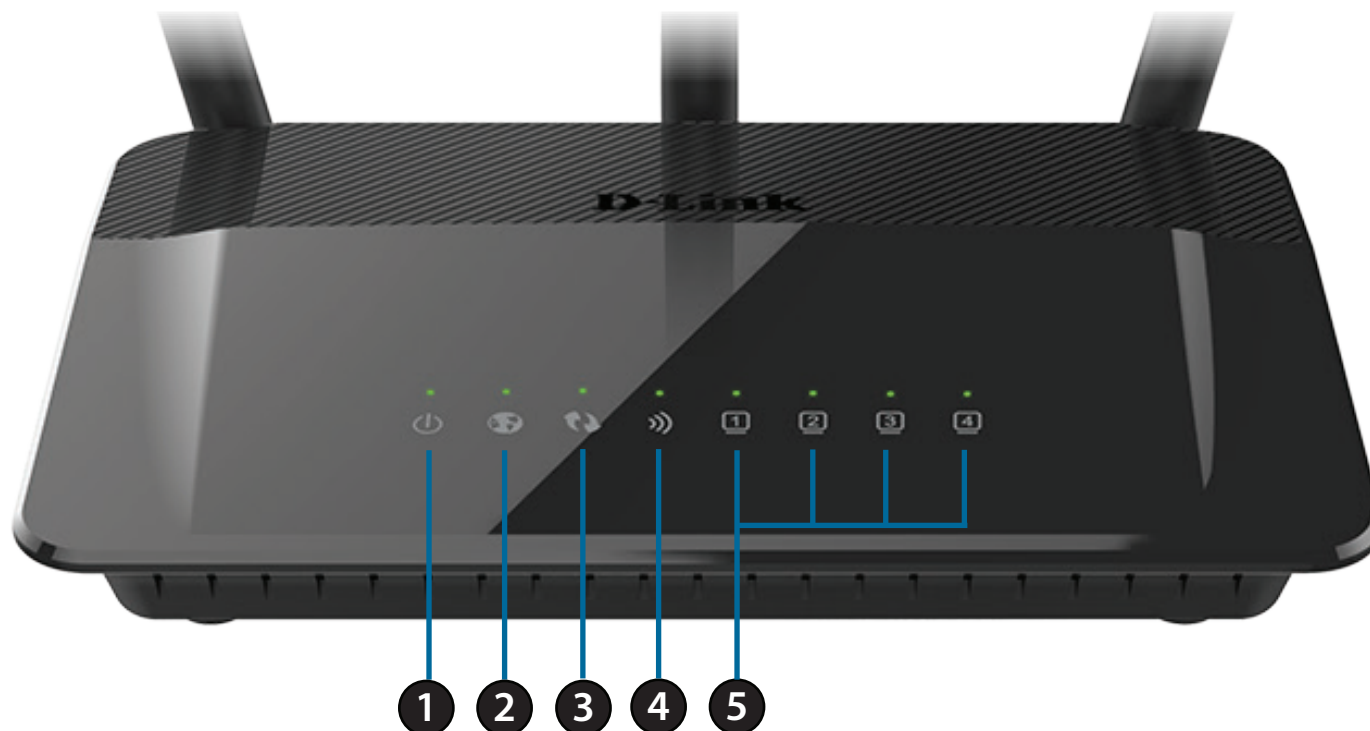

1	Power LED	A solid green light indicates a proper connection to the power supply. The light will blink when it is in recovery mode.
2	Internet LED	A solid light indicates an established connection on the Internet port. If the LED is not lit, there is no connection to the Internet.
3	WPS LED	A solid light indicates that the WPS handshake has been completed. The light will blink while the WPS handshake is processing.
4	WLAN LED	A solid light indicates that the wireless segment is ready. The light will blink while data is being transmitted.
5	Ethernet LEDs 1-4	A solid light indicates a connection to an Ethernet-enabled computer on ports 1-4 respectively. The light will blink while data is being transmitted.

Installation

This section will walk you through the installation process. Placement of the router is very important. Do not place the router in an enclosed area such as a closet, cabinet, or in the attic or garage.

Before you Begin

- Please configure the router with the computer that was last connected directly to your modem.
- You can only use the Ethernet port on your modem. If you were using the USB connection before using the router, then you must turn off your modem, disconnect the USB cable and connect an Ethernet cable to the Internet port on the router, and then turn the modem back on. In some cases, you may need to call your ISP to change connection types (USB to Ethernet).
- If you have DSL and are connecting via PPPoE, make sure you disable or uninstall any PPPoE software such as WinPoET, BroadJump, or EnterNet 300 from your computer or you will not be able to connect to the Internet.

Wireless Installation Considerations

The D-Link wireless router lets you access your network using a wireless connection from virtually anywhere within the operating range of your wireless network. Keep in mind that the number, thickness and location of walls, ceilings, or other objects that the wireless signals must pass through may limit the range. Typical ranges vary depending on the types of materials and background RF (radio frequency) noise in your home or business. The key to maximizing wireless range is to follow these basic guidelines:

1. Keep the number of walls and ceilings between the D-Link router and other network devices to a minimum - each wall or ceiling can reduce your adapter's range from 3-90 feet (1-30 meters.) Position your devices so that the number of walls or ceilings is minimized.
2. Be aware of the direct line between network devices. A wall that is 1.5 feet thick (0.5 meters), at a 45-degree angle appears to be almost 3 feet (1 meter) thick. At a 2-degree angle it looks over 42 feet (14 meters) thick! Position devices so that the signal will travel straight through a wall or ceiling (instead of at an angle) for better reception.
3. Building materials make a difference. A solid metal door or aluminum studs may have a negative effect on range. Try to position access points, wireless routers, and computers so that the signal passes through drywall or open doorways. Materials and objects such as glass, steel, metal, walls with insulation, water (fish tanks), mirrors, file cabinets, brick, and concrete will degrade your wireless signal.
4. Keep your product away (at least 3-6 feet or 1-2 meters) from electrical devices or appliances that generate RF noise.
5. If you are using 2.4 GHz cordless phones or X-10 (wireless products such as ceiling fans, lights, and home security systems), your wireless connection may degrade dramatically or drop completely. Make sure your 2.4 GHz phone base is as far away from your wireless devices as possible. The base transmits a signal even if the phone is not in use.

Wall Mounting

You can mount the DIR-859 on a wall or partition for ease and convenience.

To wall mount your device:

Step 1


Mark and drill a hole in the location of your choice. Then screw the screws to the wall to prepare the router for mounting.

Step 2

Place the mounting holes on the bottom of the device over the screws, and slide the device into place.


Step 3

Finally, connect the required cables to the device as outlined on page 10.

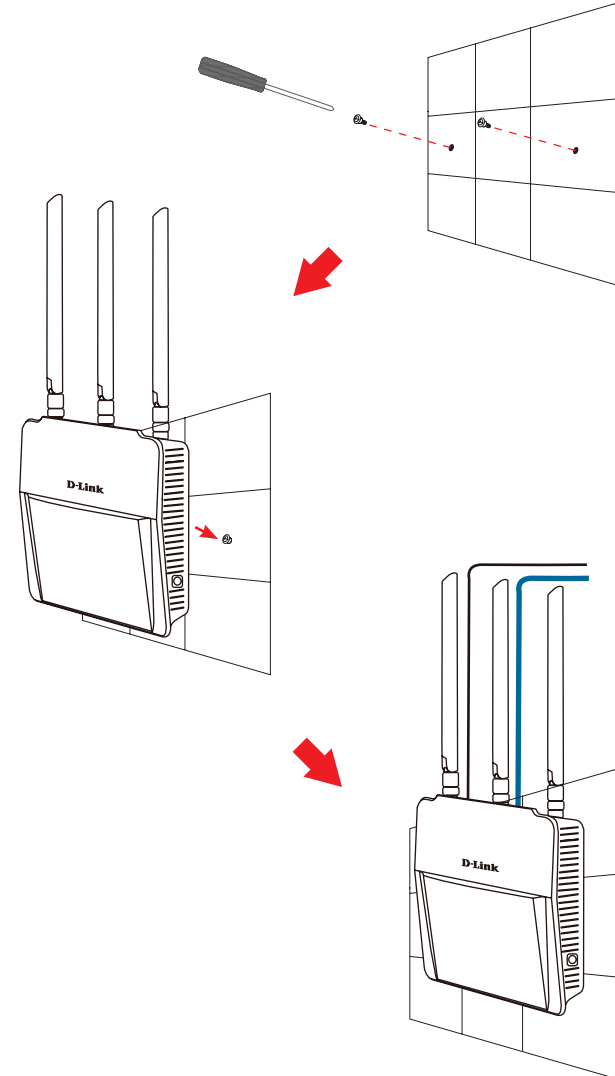


Manual Setup

1. Turn off and unplug your cable or DSL broadband modem. This is required.

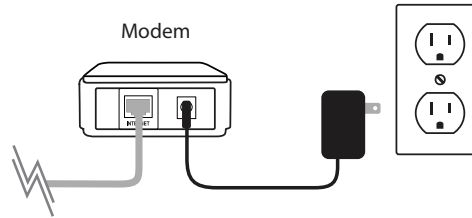

2. Position your router close to your modem and a computer. Place the router in an open area of your intended work area for better wireless coverage.
3. Unplug the Ethernet cable from your modem (or existing router if upgrading) that is connected to your computer. Plug it into the LAN port labeled **1** on the back of your router. The router is now connected to your computer.

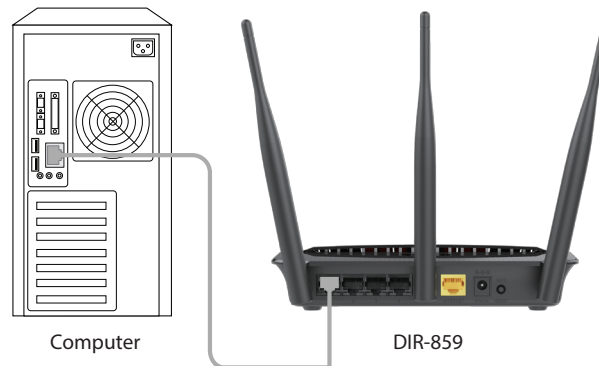

4. Plug one end of the included Ethernet cable that came with your router into the yellow port labeled INTERNET on the back of the router. Plug the other end of this cable into the Ethernet port on your modem.



5. Reconnect the power adapter to your cable or DSL broadband modem and wait for two minutes.
6. Connect the supplied power adapter into the power receptor on the back of the router and then plug it into a power outlet or surge protector. Press the power button and verify that the power LED is lit. Allow 1 minute for the router to boot up.



7. If you are connecting to a broadband service, you may be online already and further configuration will be optional.


Getting Started

There are several different ways you can configure your router to connect to the Internet and connect to your clients:

- **D-Link Setup Wizard** - This wizard will launch when you log into the router for the first time. **Setup Wizard** on page 13.
- **QRS Mobile App** - Use your iPhone, iPad, or iPod touch to configure your router. Refer to **QRS Mobile App** on page 17.
- **Manual Setup** - Log into the router and manually configure your router. Refer to **Manual Setup** on page 10.


Setup Wizard

If this is your first time installing the router, open your web browser and enter **http://dlinkrouter.local/** in the address bar. Alternatively, enter the IP address of the router (default: **http://192.168.0.1**). Please refer to **Configuration** on page 22.

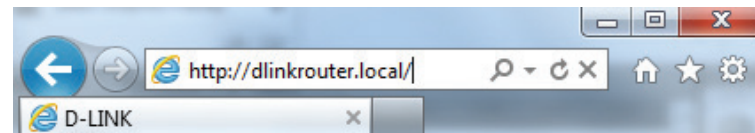


The wizard is designed to guide you through a step-by-step process to configure your new D-Link router and connect to the Internet.

Click **Next** to continue.

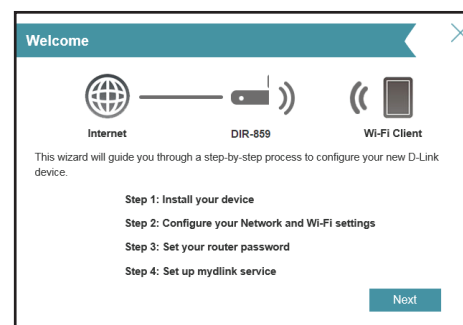


Please wait while your router detects your Internet connection type. If the router detects your Internet connection, you may need to enter your ISP information such as username and password.

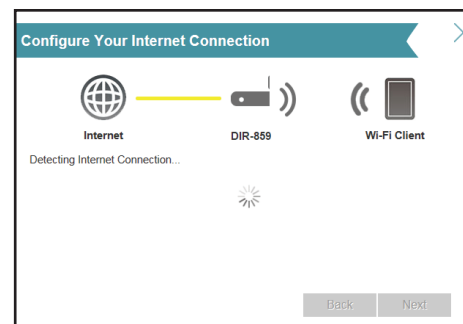

If the router does not detect a valid Internet connection, a list of connection types to choose from will be displayed.

Select your Internet connection type (this information can be obtained from your Internet service provider) and click **Next** to continue.

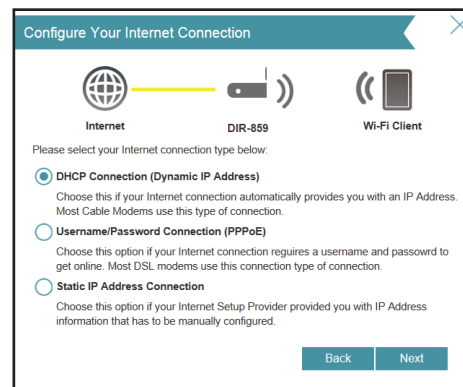

The screen is titled "Configure Your Internet Connection" and features a close button (X) in the top right corner. At the top, there are three icons: a globe for "Internet", a modem for "DIR-859", and a smartphone for "Wi-Fi Client". Below these icons, the text reads "Please select your Internet connection type below:". There are three radio button options: "DHCP Connection (Dynamic IP Address)" which is selected, "Username/Password Connection (PPPoE)", and "Static IP Address Connection". Each option has a brief description. At the bottom right, there are "Back" and "Next" buttons.

Configure Your Internet Connection

Internet DIR-859 Wi-Fi Client


Please select your Internet connection type below:

- ☒ **DHCP Connection (Dynamic IP Address)**
Choose this if your Internet connection automatically provides you with an IP Address. Most Cable Modems use this type of connection.
- ☐ **Username/Password Connection (PPPoE)**
Choose this option if your Internet connection requires a username and password to get online. Most DSL modems use this connection type of connection.
- ☐ **Static IP Address Connection**
Choose this option if your Internet Setup Provider provided you with IP Address information that has to be manually configured.

Back Next

If the router detected or you selected **PPPoE**, enter your PPPoE username and password and click **Next** to continue.

Note: Make sure to remove your PPPoE software from your computer. The software is no longer needed and will not work through a router.

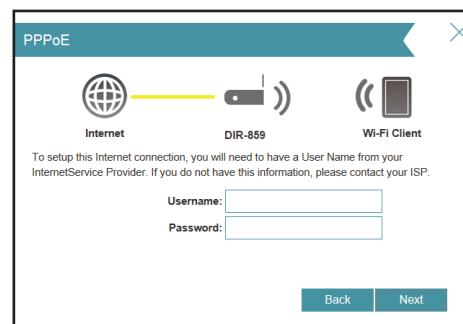

The screen is titled "PPPoE" and features a close button (X) in the top right corner. It has the same three icons at the top as the previous screen. The text below the icons says "To setup this Internet connection, you will need to have a User Name from your InternetService Provider. If you do not have this information, please contact your ISP:". Below this text are two input fields labeled "Username:" and "Password:". At the bottom right, there are "Back" and "Next" buttons.

PPPoE

Internet DIR-859 Wi-Fi Client


To setup this Internet connection, you will need to have a User Name from your InternetService Provider. If you do not have this information, please contact your ISP.

Username:

Password:

Back Next

If the router detected or you selected **Static**, enter the IP and DNS settings supplied by your ISP. Click **Next** to continue.

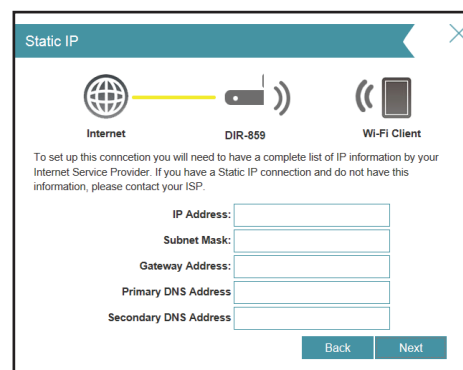

The screen is titled "Static IP" and features a close button (X) in the top right corner. It has the same three icons at the top as the previous screens. The text below the icons says "To set up this connction you will need to have a complete list of IP information by your Internet Service Provider. If you have a Static IP connection and do not have this information, please contact your ISP:". Below this text are five input fields labeled "IP Address:", "Subnet Mask:", "Gateway Address:", "Primary DNS Address", and "Secondary DNS Address". At the bottom right, there are "Back" and "Next" buttons.

Static IP

Internet DIR-859 Wi-Fi Client

To set up this connction you will need to have a complete list of IP information by your Internet Service Provider. If you have a Static IP connection and do not have this information, please contact your ISP.

IP Address:

Subnet Mask:

Gateway Address:

Primary DNS Address


Secondary DNS Address

Back Next

For both the 2.4 GHz and 5 GHz segments, create a Wi-Fi network name (SSID) using up to 32 characters.


Create a Wi-Fi password (between 8-63 characters). Your wireless clients will need to have this passphrase or key entered to be able to connect to your wireless network.

Click **Next** to continue.

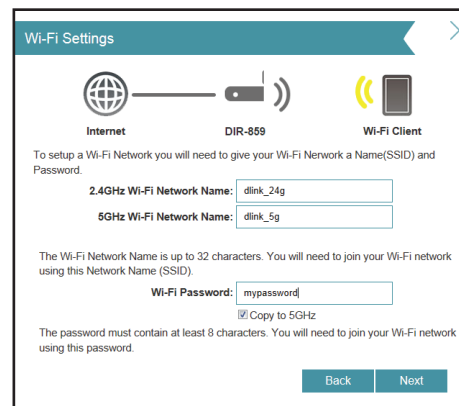


The Wi-Fi Settings screen displays a network diagram at the top with 'Internet' (globe icon), 'DIR-859' (router icon), and 'Wi-Fi Client' (phone icon). Below the diagram, text explains that a Wi-Fi network requires a Name (SSID) and Password. Two input fields are provided: '2.4GHz Wi-Fi Network Name' with the value 'dlink_24g' and '5GHz Wi-Fi Network Name' with the value 'dlink_5g'. A third input field for 'Wi-Fi Password' contains 'mypassword'. A checkbox labeled 'Copy to 5GHz' is checked. A note states that the password must be at least 8 characters. At the bottom right are 'Back' and 'Next' buttons.

In order to secure the router, please enter a new password. You will be prompted for this password every time you want to use the router's web configuration utility. Click **Next** to continue.

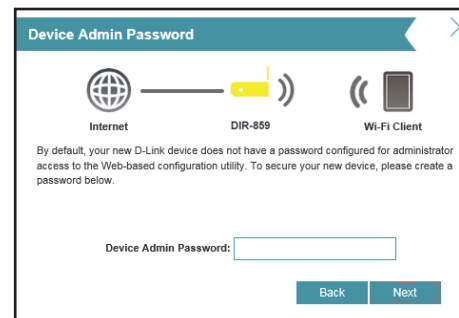


The Device Admin Password screen features the same network diagram as the previous screen. Text below explains that a password must be created for administrator access to the web-based configuration utility. A single input field for 'Device Admin Password' is shown. 'Back' and 'Next' buttons are located at the bottom right.

The Summary window will display your settings. Click **Next** if you are satisfied, or click **Back** to make changes to them.

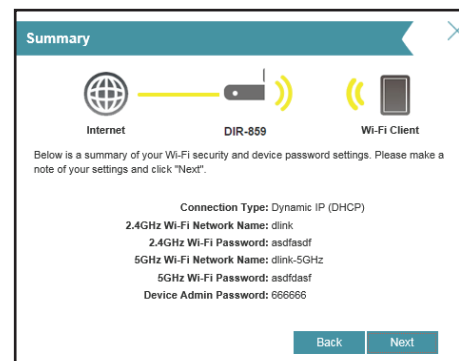

The Summary screen displays the network diagram and a summary of the configured settings. The text reads: 'Below is a summary of your Wi-Fi security and device password settings. Please make a note of your settings and click "Next".' The settings listed are: Connection Type: Dynamic IP (DHCP); 2.4GHz Wi-Fi Network Name: dlink; 2.4GHz Wi-Fi Password: asdfasdf; 5GHz Wi-Fi Network Name: dlink-5GHz; 5GHz Wi-Fi Password: asdfasf; and Device Admin Password: 666666. 'Back' and 'Next' buttons are at the bottom right.

At the end of the wizard, you will be presented with a final summary of your settings. Click **Finish** to close the wizard.

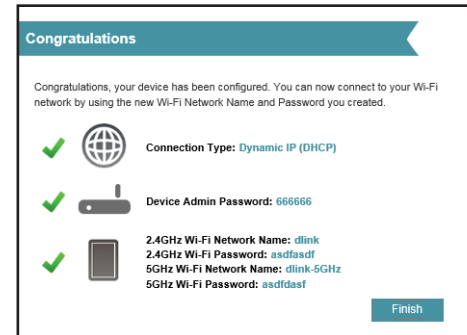

QRS Mobile App

QRS Mobile app allows you to install and configure your router from your mobile device.

Note: The screenshots may be different depending on your mobile device's OS version.

Step 1

Search for the free **QRS Mobile** App on the iTunes Store or Google Play.



Step 2

Once your app is installed, you may now configure your router. Connect to the router wirelessly by going to your wireless utility on your device. Scan for the Wi-Fi name (SSID) as listed on the supplied info card. Select and then enter your Wi-Fi password.

D-Link Wi-Fi Configuration Card	
Default Configuration	Wi-Fi Name(SSID) 2.4GHz:
Wi-Fi Name (SSID):	Wi-Fi Password:
dlink-a8fa	Wi-Fi Name(SSID) 5GHz *:
Wi-Fi Password:	Wi-Fi Password *:
akbdj19368	
Your configuration	
Username: "Admin"	
Password:	
*For applicable models	
DCWWR010010	

To configure your router, go to:
http://dlinkrouter.local.
Or http://192.168.0.1
Username: "Admin"
Password: " (leave the field blank)

Step 3



Once you connect to the router, launch the QRS Mobile app from the Home screen of your device.

Note: The following steps show the Android interface of the QRS Mobile app. If you are using an iPhone, iPad, or iPod touch, the appearance may be different to that of the screenshots, but the process is the same.




Step 4

You will see the welcome screen. Tap **Start** to proceed, then enter your device password and tap **Log In**. Tap **Next** once the Operation Mode screen appears.

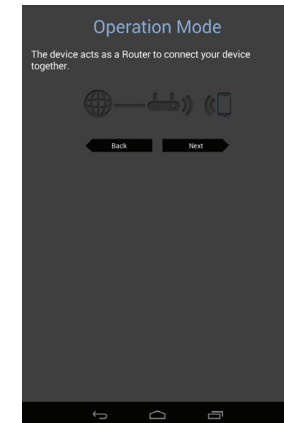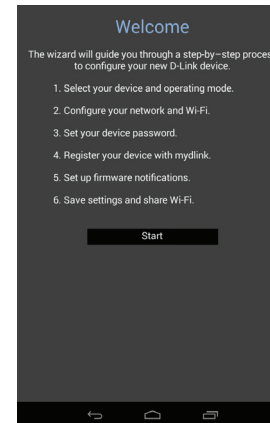

Step 5

At this point, please ensure that you the router is connected to a modem. Plug one end of the provided Ethernet cable into your DSL or cable modem, and plug the other end into the port marked INTERNET on the DIR-859. Tap **Next** to automatically detect your Internet connection and proceed to the next step.

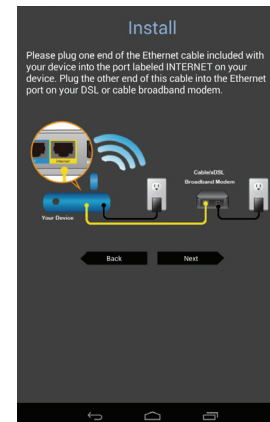


Step 6

Firstly, enter a network name (SSID) of your choice, or leave it unchanged to accept the default SSID.


Secondly, choose a Wi-Fi password of at least 8 characters. Any device trying to connect to the router wirelessly will need to enter this password the first time it connects.

Finally, tap **Next** to proceed.

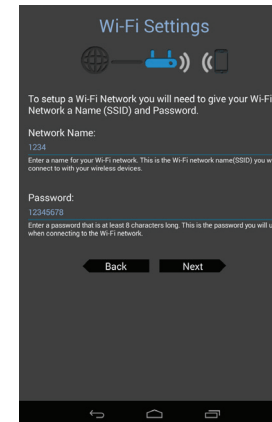

Step 7

Enter the administrator password of your choice. Unlike the Wi-Fi password, this password is only required when you need to configure the router. See **Configuration** on page 22 for details of when this password is used. Tap **Next** to proceed.


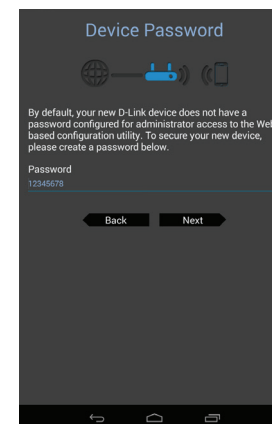


Step 8

If you already have a mydlink account, select **Yes, I have a mydlink account** and enter your mydlink email address and password. Lastly, tap **Sign In** to set up the router to use your mydlink account.

If you do not have a mydlink account, select **No, I want to create a new mydlink account**. Enter your E-mail address, choose a mydlink password and check the **I accept the mydlink terms and conditions** box. Finally, tap **Register account** to create your new mydlink account.


If you do not want to configure your router with mydlink at this stage, tap **Skip** to proceed.

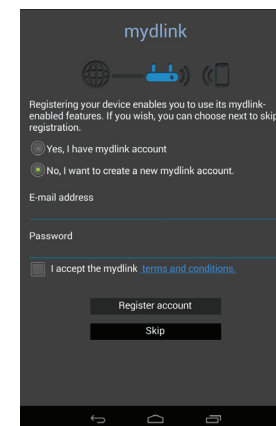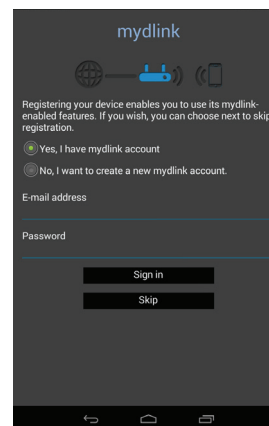

Step 9


If you wish to receive push notifications whenever a new firmware update is available, check the **Notify me when new firmware is available** box and tap **Next**.

Otherwise, just tap **Next** to proceed.

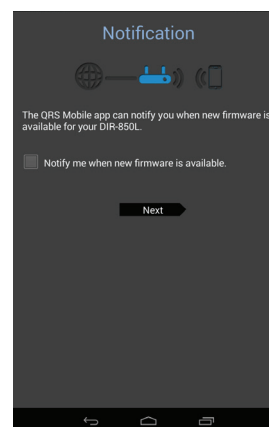

Step 10



You will be presented with a summary of your chosen settings. Tap **Save** to complete the setup.

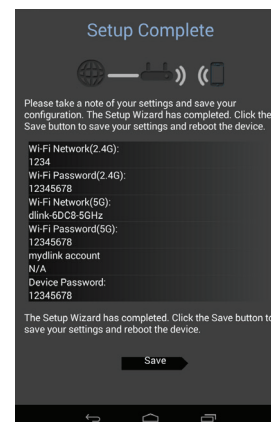

Congratulations, your device has been successfully configured! You can share this information by tapping **Share By NFC**, **Share By E-mail**, or tap **Finish** to exit the app.

If you tap **Share By NFC**, you can now touch the tag with your other device until the confirmation message appears.

Note: *NFC is not supported by iPhone, iPad, and iPod touch devices.*

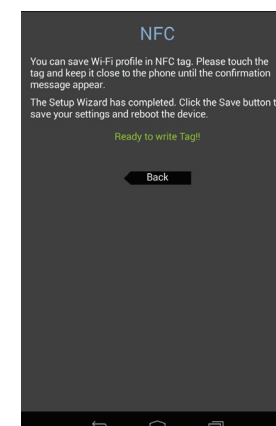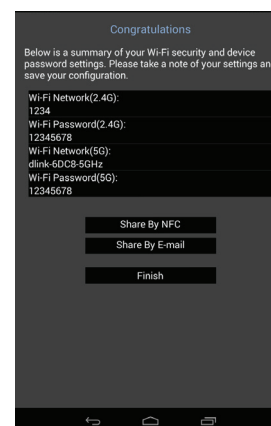


Configuration

To access the configuration utility, open a web-browser such as Internet Explorer and enter **http://dlinkrouter.local**.

Windows and Mac users may also connect by typing the IP address of the router (by default this is **http://192.168.0.1**) in the address bar.

Enter your password. If you previously followed the setup wizard (see page 13), please use the admin password you entered during the wizard. Otherwise, leave the password blank. Click **Log In** to proceed.

Note: If you cannot remember your password and cannot log in, press the reset button (see **Troubleshooting** on page 91) to restore the router to its default settings.

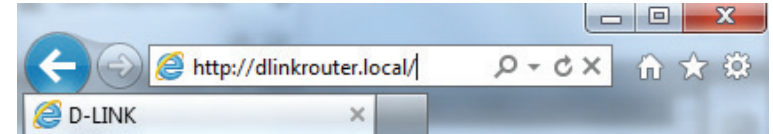


Admin Password:

Log In

The router's home page will open displaying its current connection status.

The bar at the top of the page has quick access to Settings and Management functions. You may quickly jump back Home at any time.

Note: The system will automatically log out after a period of inactivity.

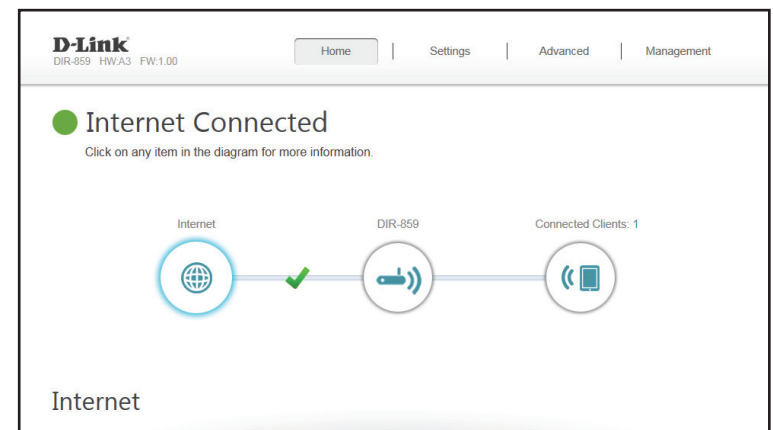

Home

The Home page displays the current status of the router in the form of an interactive diagram. You can click each icon to display information about each part of the network at the bottom of the screen. The menu bar at the top of the page will allow you to quickly navigate to other pages.


Internet

The Home page displays whether or not the router is currently connected to the Internet. If it is disconnected, click **Click to repair** to bring up the setup wizard (see **Setup Wizard** on page 13).

To bring up more details about your Internet connection, click on the **Internet** icon. Click **IPv4** or **IPv6** to see details of the IPv4 connection and IPv6 connection respectively.

Click **Release** to disconnect from the Internet. If you do this and wish to reconnect, click **Renew**.

To reconfigure the Internet settings, refer to **Settings** on page 26.

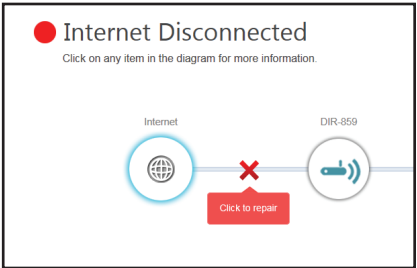

D-Link
DIR-859 HW:A3 FW:1.00

Home | Settings | Advanced | Management

Internet Connected

Click on any item in the diagram for more information.

Internet

DIR-859

Connected Clients: 1

Internet

Cable Status: Connected

Connection Type: Dynamic IP (DHCP)

Network Status: Connected

Connection Uptime: 2 Day 2 Hour 31 Min 42 Sec

MAC Address: 00:11:22:33:44:52

IP Address: 172.17.5.138

Subnet Mask: 255.255.255.0

Default Gateway: 172.17.5.254

Primary DNS Server: 192.168.168.249

Secondary DNS Server: 192.168.168.201

Release IP Address

Go to settings


DIR-859

Click on the **DIR-859** icon to view details about the router and its wireless settings.

Here you can see the router’s current wireless settings, as well as its MAC address and IPv4/IPv6 addresses.

To reconfigure the network settings, either click **Go to settings** on the lower left, or click **Settings** (at the top of the page) and then **Network** on the menu that appears. Refer to **Network** on page 56.

To reconfigure the wireless settings, either click **Go to settings**, on the lower right, or click **Settings** (at the top of the page) and then **Wireless** on the menu that appears. Refer to **Wireless** on page 53.

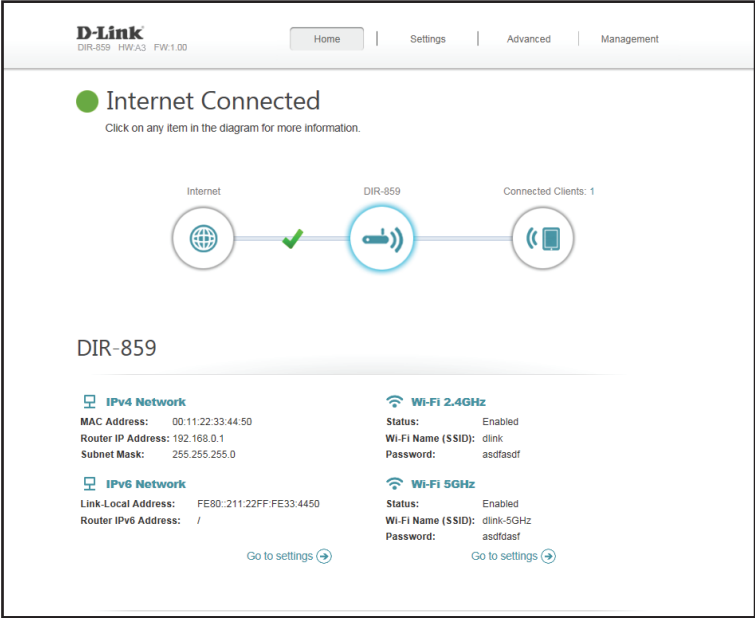


Connected Clients

Click on the **Connected Clients** icon to view details about the router and its wireless settings.

On this page you can see all the clients currently connected to the router, and their IP addresses.

To edit each client's settings, click the pencil icon on the client you want to edit.

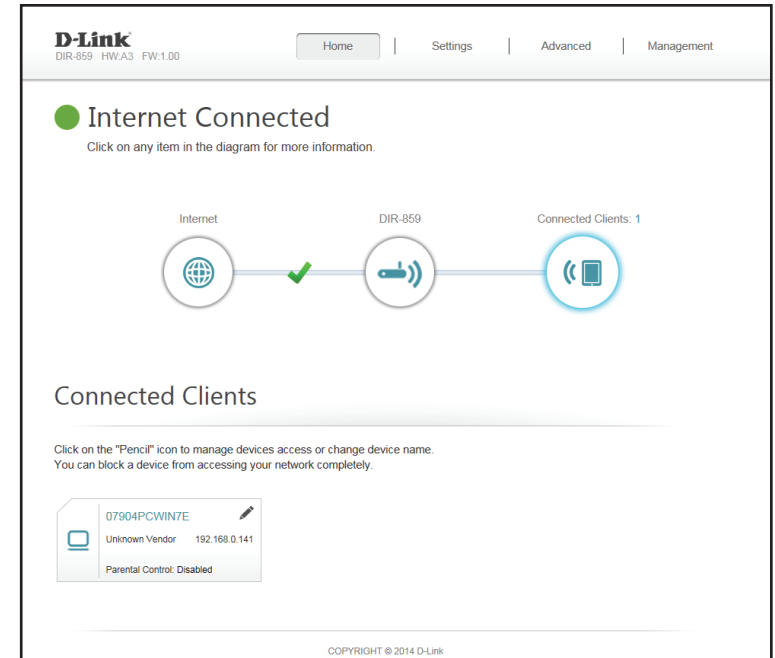

Name: Enter a custom name for this client.

Vendor: Displays the vendor of the device.

IP Address: Enter a specific IP address for this client.

Reserve IP: Enable to reserve this IP address for this client.

Parental Control: Enable or disable parental control.

Click **Save** when you are done.

The 'Edit Rule' dialog box contains the following fields and values:

- Name: 07904PCWIN7E
- Vendor: Unknown Vendor
- MAC Address: 44:37:e6:b5:ff:3d
- IP Address: 192.168.0.141
- Reserve IP: Disabled
- Parental Control: Disabled

A 'Save' button is located at the bottom right of the dialog.

Settings Wizard

In the Settings menu on the bar on the top of the page, click **Wizard** to open the setup wizard. This is the same wizard that appears when you start the router for the first time. Refer to **Setup Wizard** on page 13 for details.

Internet

In the Settings menu on the bar on the top of the page, click **Internet** to see the Internet configuration options.

My Internet Choose your Internet connection type from the drop-down menu.
Connection Is: You will be presented with the appropriate options for your connection type. Click **Advanced Settings...** to expand the list and see all of the options.

For **Dynamic IP (DHCP)** refer to **Dynamic IP (DCHP)** on page 27.

For **Static IP** refer to **Static IP** on page 28.


For **PPPoE** refer to **PPPoE** on page 29.

For **PPTP** refer to **PPTP** on page 30.

For **L2TP** refer to **L2TP** on page 32.

For **DS-Lite** refer to **DS-Lite** on page 34.

To configure an IPv6 connection, click the **IPv6** link. Refer to **IPv6** on page 35.

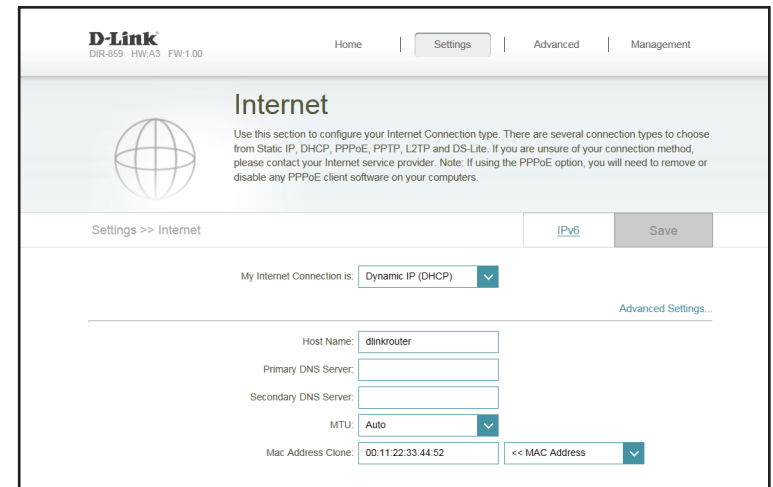

The screenshot shows the D-Link Internet configuration page. At the top, there is a navigation bar with 'Home', 'Settings', 'Advanced', and 'Management'. Below this, the 'Internet' section is highlighted. A globe icon is next to the title. A note states: 'Use this section to configure your Internet Connection type. There are several connection types to choose from Static IP, DHCP, PPPoE, PPTP, L2TP and DS-Lite. If you are unsure of your connection method, please contact your Internet service provider. Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.' Below the note, there is a breadcrumb 'Settings >> Internet' and a 'Save' button. The 'My Internet Connection is:' dropdown menu is set to 'Dynamic IP (DHCP)'. To the right of this dropdown is a link for 'Advanced Settings...'. Below this, there are input fields for 'Host Name' (containing 'dlinkrouter'), 'Primary DNS Server', and 'Secondary DNS Server'. There is also an 'MTU' dropdown menu set to 'Auto' and a 'Mac Address Clone' field containing '00:11:22:33:44:52' with a '<< MAC Address' dropdown menu.

Dynamic IP (DCHP)

Select **Dynamic IP (DHCP)** to obtain IP address information automatically from your Internet Service Provider (ISP). Select this option if your ISP does not give you an IP address to use.

Host Name: The host name is optional but may be required by some ISPs. Leave it blank if you are not sure.

Primary DNS Server: Enter the primary DNS server IP address assigned by your ISP. This address is usually obtained automatically from your ISP.

Secondary DNS Server: Enter the secondary DNS server IP address assigned by your ISP. This address is usually obtained automatically from your ISP.

MTU: Maximum Transmission Unit - you may need to change the MTU for optimal performance with your ISP.

MAC Address Clone: The default MAC address is set to the Internet port's physical interface MAC address on the router. You can use the drop-down menu to replace the Internet port's MAC address with the MAC address of a connected client.

Click **Save** when you are done.

The screenshot shows the D-Link DIR-859 Internet Settings page. The top navigation bar includes 'Home', 'Settings', 'Advanced', and 'Management'. The 'Settings' tab is selected. The page title is 'Internet'. Below the title is a globe icon and a note: 'Use this section to configure your Internet Connection type. There are several connection types to choose from Static IP, DHCP, PPPoE, PPTP, L2TP and DS-Lite. If you are unsure of your connection method, please contact your Internet service provider. Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.'

The 'My Internet Connection is:' dropdown menu is set to 'Dynamic IP (DHCP)'. Below this are fields for 'Host Name' (containing 'dlinkrouter'), 'Primary DNS Server', and 'Secondary DNS Server'. The 'MTU' dropdown menu is set to 'Auto'. The 'Mac Address Clone' field contains '00:11:22:33:44:52' and a dropdown menu set to '<< MAC Address'. A 'Save' button is located at the top right of the settings area. The footer of the page reads 'COPYRIGHT © 2014 D-Link'.

Static IP

Select **Static IP** if your IP information is provided by your Internet service provider (ISP).

IP Address: Enter the IP address provided by your ISP.

Subnet Mask: Enter the subnet mask provided by your ISP.

Default Gateway: Enter the default gateway address provided by your ISP.

Primary DNS Server: Enter the primary DNS server IP address assigned by your ISP.

Secondary DNS Server: Enter the secondary DNS server IP address assigned by your ISP.

MTU: Maximum Transmission Unit - you may need to change the MTU for optimal performance with your ISP.

MAC Address Clone: The default MAC address is set to the Internet port's physical interface MAC address on the router. You can use drop-down menu to replace the Internet port's MAC address with the MAC address of a connected client.

Click **Save** when you are done.

The screenshot shows the D-Link DIR-859 Internet Settings page. The top navigation bar includes 'Home', 'Settings', 'Advanced', and 'Management'. The 'Settings' tab is active. The page title is 'Internet'. Below the title, there is a globe icon and a paragraph explaining the connection types. The 'My Internet Connection is:' dropdown menu is set to 'Static IP'. Below this, there are input fields for 'IP Address', 'Subnet Mask', 'Default Gateway', and 'Primary DNS Server'. There is also a 'Secondary DNS Server' field. The 'MTU' dropdown menu is set to 'Auto'. The 'Mac Address Clone' field shows '00:11:22:33:44:52' and a dropdown menu to select a MAC address. A 'Save' button is located at the top right of the settings area. The footer of the page reads 'COPYRIGHT © 2014 D-Link'.

PPPoE

Select **PPPoE** if your Internet connection requires you to enter a username and password. This information is provided by your Internet service provider (ISP).

Username: Enter the username provided by your ISP.

Password: Enter the password provided by your ISP.

Reconnect Mode: Select either **Always-on**, **On-Demand**, or **Manual**.

Maximum Idle Time: Enter a maximum idle time during which the Internet connection is maintained during inactivity. To disable this feature, enable Auto-reconnect.

Address Mode: Select **Static IP** if your ISP assigned you the IP address, subnet mask, gateway, and DNS server addresses. In most cases, select **Dynamic IP**.

IP Address: Enter the IP address provided by your ISP (Static IP only).

Service Name: Enter the ISP service name (optional).

Primary DNS Server: Enter the primary DNS server IP address assigned by your ISP.

Secondary DNS Server: Enter the secondary DNS server IP address assigned by your ISP.

MTU: Maximum Transmission Unit - you may need to change the MTU for optimal performance with your ISP.

Click **Save** when you are done.

The screenshot shows the D-Link DIR-859 Internet Settings page. The page has a header with the D-Link logo and model number (DIR-859 HW:V3 FW:1.00) and navigation tabs (Home, Settings, Advanced, Management). The main heading is "Internet" with a globe icon. Below the heading is a brief instruction: "Use this section to configure your Internet Connection type. There are several connection types to choose from Static IP, DHCP, PPPoE, PPTP, L2TP and DS-Lite. If you are unsure of your connection method, please contact your Internet service provider. Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers." The page is divided into two sections: "Settings >> Internet" and "IPv6". The "Settings >> Internet" section contains the following fields: "My Internet Connection is:" (set to PPPoE), "Username:" (empty), "Password:" (empty), "Reconnect Mode:" (set to On demand), "Maximum Idle Time:" (set to 5 minutes), "Address Mode:" (set to Dynamic IP), "Service Name:" (empty), "Primary DNS Server:" (empty), "Secondary DNS Server:" (empty), and "MTU:" (set to Auto). There is a "Save" button in the top right corner of the settings section and a link for "Advanced Settings...". The footer of the page reads "COPYRIGHT © 2014 D-Link".

PPTP

Choose **PPTP** (Point-to-Point-Tunneling Protocol) if your Internet Service Provider (ISP) uses a PPTP connection. Your ISP will provide you with a username and password.

PPTP Server IP Address: Enter the PPTP server IP address provided by your ISP.

Username: Enter the username provided by your ISP.

Password: Enter the password provided by your ISP.

Reconnect Mode: Select either **Always-on**, **On-Demand**, or **Manual**.

Maximum Idle Time: Enter a maximum idle time during which the Internet connection is maintained during inactivity. To disable this feature, enable Auto-reconnect.

Address Mode: Select **Static IP** if your ISP assigned you the IP address, subnet mask, gateway, and DNS server addresses. In most cases, select **Dynamic IP**.

PPTP IP Address: Enter the IP address provided by your ISP (Static IP only).

PPTP Subnet Mask: Enter the subnet mask provided by your ISP (Static IP only).

PPTP Gateway IP Address: Enter the gateway IP address provided by your ISP (Static IP only).

Primary DNS Server: Enter the primary DNS server IP address assigned by your ISP.

The screenshot shows the 'Internet' configuration page in the D-Link DIR-859 web interface. The page has a top navigation bar with 'Home', 'Settings', 'Advanced', and 'Management' tabs. The D-Link logo and model number 'DIR-859 HW:A3 FW:1.00' are in the top left corner. The main heading is 'Internet' with a globe icon. Below the heading is a note: 'Use this section to configure your Internet Connection type. There are several connection types to choose from Static IP, DHCP, PPPoE, PPTP, L2TP and DS-Lite. If you are unsure of your connection method, please contact your Internet service provider. Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.' The page contains several input fields and dropdown menus: 'My Internet Connection is' (set to PPTP), 'PPTP Server IP Address', 'Username', 'Password', 'Reconnect Mode' (set to On demand), 'Maximum Idle Time' (set to 5 minutes), 'Address Mode' (set to Dynamic IP), 'Primary DNS Server', 'Secondary DNS Server', and 'MTU' (set to Auto). There is a 'Save' button and an 'IPv6' link. An 'Advanced Settings...' link is also present.

Secondary DNS Server: Enter the secondary DNS server IP address assigned by your ISP.

MTU: Maximum Transmission Unit - you may need to change the MTU for optimal performance with your ISP.

Click **Save** when you are done.

D-Link


DIR-859 HW:V3 FW:1.00

Home

Settings

Advanced

Management



Internet

Use this section to configure your Internet Connection type. There are several connection types to choose from Static IP, DHCP, PPPoE, PPTP, L2TP and DS-Lite. If you are unsure of your connection method, please contact your Internet service provider. Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

Settings >> Internet

IPv6

Save

My Internet Connection is: PPTP

PPTP Server IP Address:

Username:

Password:

Reconnect Mode: On demand

Maximum Idle Time: 5 minutes

Advanced Settings...

Address Mode: Dynamic IP

Primary DNS Server:

Secondary DNS Server:

MTU: Auto

COPYRIGHT © 2014 D-Link

L2TP

Choose **L2TP** (Layer 2 Tunneling Protocol) if your Internet Service Provider (ISP) uses a L2TP connection. Your ISP will provide you with a username and password.

L2TP Server IP Address: Enter the L2TP server IP address provided by your ISP.

Username: Enter the username provided by your ISP.

Password: Enter the password provided by your ISP.

Reconnect Mode: Select either **Always-on**, **On-Demand**, or **Manual**.

Maximum Idle Time: Enter a maximum idle time during which the Internet connection is maintained during inactivity. To disable this feature, enable Auto-reconnect.

Address Mode: Select **Static IP** if your ISP assigned you the IP address, subnet mask, gateway, and DNS server addresses. In most cases, select **Dynamic IP**.

L2TP IP Address: Enter the IP address provided by your ISP (Static IP only).

L2TP Subnet Mask: Enter the subnet mask provided by your ISP (Static IP only).

L2TP Gateway IP Address: Enter the gateway IP address provided by your ISP (Static IP only).

Primary DNS Server: Enter the primary DNS server IP address assigned by your ISP.

The screenshot shows the D-Link DIR-859 web interface. The top navigation bar includes 'Home', 'Settings', 'Advanced', and 'Management'. The 'Settings' tab is selected. The main heading is 'Internet'. Below it, a globe icon is shown. The text says: 'Use this section to configure your Internet Connection type. There are several connection types to choose from Static IP, DHCP, PPPoE, PPTP, L2TP and DS-Lite. If you are unsure of your connection method, please contact your Internet service provider. Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.'

The 'Settings >> Internet' breadcrumb is shown. There are 'IPv6' and 'Save' buttons. The 'My Internet Connection is' dropdown is set to 'L2TP'. The 'L2TP Server IP Address' field is empty. The 'Username' and 'Password' fields are empty. The 'Reconnect Mode' dropdown is set to 'On demand'. The 'Maximum Idle Time' is set to '5 minutes'. The 'Address Mode' dropdown is set to 'Dynamic IP'. The 'Primary DNS Server' and 'Secondary DNS Server' fields are empty. The 'MTU' dropdown is set to 'Auto'. An 'Advanced Settings...' link is at the bottom right. The footer says 'COPYRIGHT © 2014 D-Link'.

Secondary DNS Server: Enter the secondary DNS server IP address assigned by your ISP.

MTU: Maximum Transmission Unit - you may need to change the MTU for optimal performance with your ISP.

Click **Save** when you are done.

DIR-859

HW: A3

FW: 1.00

Home

Settings

Advanced

Management

Internet

Use this section to configure your Internet Connection type. There are several connection types to choose from Static IP, DHCP, PPPoE, PPTP, L2TP and DS-Lite. If you are unsure of your connection method, please contact your Internet service provider. Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

Settings >> Internet

IPv6

Save

My Internet Connection is:

L2TP

L2TP Server IP Address:

Username:

Password:

Reconnect Mode:

On demand

Maximum Idle Time:

5

minutes

Advanced Settings...

Address Mode:

Dynamic IP

Primary DNS Server:

Secondary DNS Server:

MTU:

Auto

COPYRIGHT © 2014 D-Link

DS-Lite

DS-Lite is an IPv6 connection type. After selecting DS-Lite, the following parameters will be available for configuration:

DS-Lite Configuration: Select **DS-Lite DHCPv6** to let the router allocate the AFTR IPv6 address automatically. Select **Manual Configuration** to enter the AFTR IPv6 address manually.

AFTR IPv6 Address: If you selected Manual Configuration above, enter the AFTR IPv6 address used here.

B4 IPv6 Address: Enter the B4 IPv4 address value used here.

WAN IPv6 Address: Once connected, the WAN IPv6 address will be displayed here.

IPv6 WAN Default Gateway: Once connected, the IPv6 WAN default gateway address will be displayed here.

Click **Save** when you are done.

The screenshot shows the D-Link DIR-859 web interface. The top navigation bar includes 'Home', 'Settings', 'Advanced', and 'Management'. The 'Settings' tab is active. The main heading is 'Internet'. Below the heading, there is a globe icon and a paragraph of text: 'Use this section to configure your Internet Connection type. There are several connection types to choose from Static IP, DHCP, PPPoE, PPTP, L2TP and DS-Lite. If you are unsure of your connection method, please contact your Internet service provider. Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.' Below this, there is a 'Settings >> Internet' breadcrumb and a 'IPv6' tab. A 'Save' button is visible. The 'My Internet Connection is:' dropdown is set to 'DS-Lite'. The 'DS-Lite Configuration:' dropdown is set to 'DS-Lite DHCPv6 Option'. The 'B4 IPv4 Address:' field shows '192.0.0.'. The 'WAN IPv6 Address:' and 'IPv6 WAN Default Gateway:' fields both show 'Not Available'. A 'Copyright © 2014 D-Link' notice is at the bottom.

IPv6

To configure an IPv6 connection, click the **IPv6** link. To return to the IPv4 settings, click **IPv4**.

My Internet Connection Is: Choose your IPv6 connection type from the drop-down menu. You will be presented with the appropriate options for your connection type. Click **Advanced Settings...** to expand the list and see all of the options.

For **Auto Detection** refer to **Auto Detection** on page 36.

For **Static IPv6** refer to **Static IPv6** on page 38.

For **Auto Configuration (SLAAC/DHCPv6)** refer to **Auto Configuration (SLAAC/DHCPv6)** on page 40.


For **PPPoE** refer to **PPPoE** on page 42.

For **IPv6 in IPv4 Tunnel** refer to **IPv6 in IPv4 Tunnel** on page 44.

For **6 to 4** refer to **6to4** on page 46.

For **6rd** refer to **6rd** on page 47.

For **Local Connectivity Only** refer to **Local Connectivity Only** on page 49.

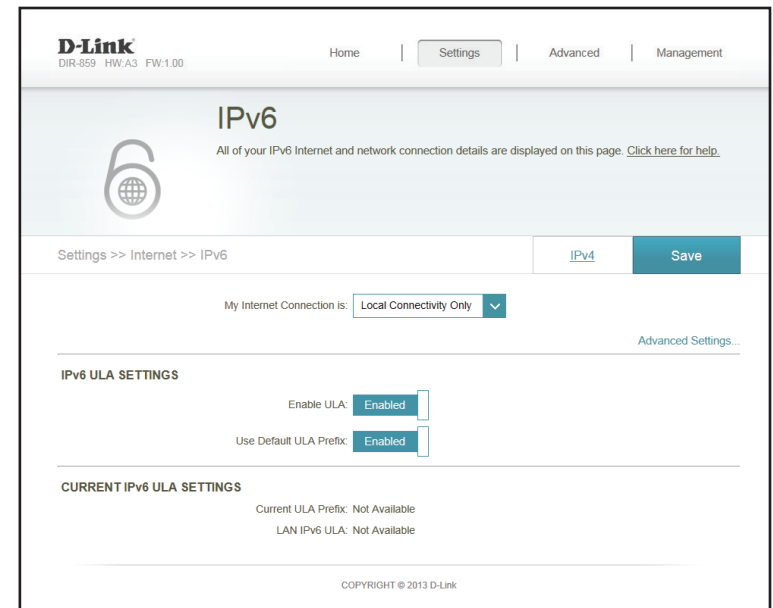

Auto Detection

This is a connection method where the ISP assigns your IPv6 address when your router requests one from the ISP's server. Some ISPs require you to make some settings on your side before your router can connect to the IPv6 Internet.

DNS Type: Select either **Obtain DNS server address automatically** or **Use the following DNS address**.

Primary DNS Server: If you selected **Use the following DNS address** above, enter the primary DNS server address.

Secondary DNS Server: If you selected **Use the following DNS address** above, enter the secondary DNS server address.

Enable DHCP-PD: Enable or disable prefix delegation services.

LAN IPv6 Address: If you disabled DHCP-PD, enter the LAN (local) IPv6 address for the router.

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

Enable Automatic IPv6 Address Assignment: Enable or disable the Automatic IPv6 Address Assignment feature.

Enable Automatic DHCP-PD in LAN: Enable or disable automatic DHCP-PD services.

D-Link
DIR-859 HW:A3 FW:1.00

Home | Settings | Advanced | Management

IPv6

All of your IPv6 Internet and network connection details are displayed on this page. [Click here for help.](#)

Settings >> Internet >> IPv6 IPv4 Save

My Internet Connection is: Auto Detection

IPv6 DNS SETTINGS

DNS Type: Use the following DNS

Primary DNS Server:

Secondary DNS Server:

LAN IPv6 ADDRESS SETTINGS

Enable DHCP-PD: Enabled

LAN IPv6 Link-Local Address: Not Available Advanced Settings...

ADDRESS AUTOCONFIGURATION SETTINGS

Enable Automatic IPv6 Address Assignment: Enabled

Enable Automatic DHCP-PD in LAN: Enabled

Autoconfiguration Type: SLAAC+Stateless DHCP

Router Advertisement Lifetime: minutes

COPYRIGHT © 2013 D-Link

Auto Configuration Type: Select **Stateful (DHCPv6)**, **SLAAC + RDNSS** or **SLAAC + Stateless DHCPv6**.

Router Advertisement Lifetime: Enter the IPv6 address lifetime (in minutes).

Click **Save** when you are done.

The screenshot displays the IPv6 configuration interface of a D-Link DIR-859 router. The page is titled 'IPv6' and includes a navigation bar with 'Home', 'Settings', 'Advanced', and 'Management' tabs. The 'Settings' tab is active, and the 'IPv6' sub-tab is selected. The page shows the following settings:

- My Internet Connection Is:** Auto Detection (dropdown menu)
- IPv6 DNS SETTINGS:**
 - DNS Type:** Use the following DNS (dropdown menu)
 - Primary DNS Server:** (text input field)
 - Secondary DNS Server:** (text input field)
- LAN IPv6 ADDRESS SETTINGS:**
 - Enable DHCP-PD:** Enabled (checkbox)
 - LAN IPv6 Link-Local Address:** Not Available
- ADDRESS AUTOCONFIGURATION SETTINGS:**
 - Enable Automatic IPv6 Address Assignment:** Enabled (checkbox)
 - Enable Automatic DHCP-PD in LAN:** Enabled (checkbox)
 - Autoconfiguration Type:** SLAAC+Stateless DHCP (dropdown menu)
 - Router Advertisement Lifetime:** 10 minutes (text input field)

The page also includes a 'Save' button and a 'Copyright © 2013 D-Link' footer.

Static IPv6

Select **Static IP** if your IPv6 information is provided by your Internet service provider (ISP).

Use Link-Local Address: Enable or disable a link-local address.

IPv6 Address: If you disabled **Use Link-Local Address**, enter the address supplied by your ISP.

Subnet Prefix Length: If you disabled **Use Link-Local Address**, enter the subnet prefix length supplied by your ISP.

Default Gateway: Enter the default gateway for your IPv6 connection.

Primary DNS Server: Enter the primary DNS server address.

Secondary DNS Server: Enter the secondary DNS server address.

LAN IPv6 Address: Enter the LAN (local) IPv6 address for the router.

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

Enable Automatic IPv6 Address Assignment: Check to enable the Automatic IPv6 Address Assignment feature.

The screenshot displays the IPv6 configuration interface of a D-Link DIR-859 router. The top navigation bar includes links for Home, Settings, Advanced, and Management. The main heading is 'IPv6', with a sub-note stating that all IPv6 Internet and network connection details are displayed on this page. The breadcrumb trail shows 'Settings >> Internet >> IPv6'. The configuration is divided into several sections: 'My Internet Connection' is set to 'Static IPv6'; 'Use Link-Local Address' is enabled; there are input fields for 'Default Gateway', 'Primary DNS Server', and 'Secondary DNS Server'; the 'LAN IPv6 ADDRESS SETTINGS' section includes a 'LAN IPv6 Address' field and a 'LAN IPv6 Link-Local Address' field currently showing 'Not Available'; and the 'ADDRESS AUTOCONFIGURATION SETTINGS' section shows 'Enable Automatic IPv6 Address Assignment' as enabled, 'Autoconfiguration Type' as 'SLAAC+Stateless DHCP', and 'Router Advertisement Lifetime' as 60 minutes. A 'Save' button is located in the top right corner of the configuration area, and a copyright notice for 2013 D-Link is at the bottom.

Auto Configuration Type: Select **Stateful (DHCPv6)**, **SLAAC + RDNSS** or **SLAAC + Stateless DHCPv6**.

Router Advertisement Lifetime: Enter the IPv6 address lifetime (in minutes).

Click **Save** when you are done.

The screenshot shows the D-Link DIR-859 IPv6 configuration interface. At the top, there's a navigation bar with 'Home', 'Settings', 'Advanced', and 'Management'. Below this, the 'IPv6' section is highlighted, with a subtitle stating 'All of your IPv6 Internet and network connection details are displayed on this page. [Click here for help.](#)' A large '6' icon with a globe inside is also present. The main configuration area is titled 'Settings >> Internet >> IPv6' and includes a 'Save' button. The settings are organized into sections: 'My Internet Connection Is:' with a dropdown set to 'Static IPv6'; 'Use Link-Local Address:' with a toggle set to 'Enabled'; 'Default Gateway:', 'Primary DNS Server:', and 'Secondary DNS Server:' each with an input field. The 'LAN IPv6 ADDRESS SETTINGS' section includes 'LAN IPv6 Address:' with an input field followed by '/64' and 'LAN IPv6 Link-Local Address: Not Available'. An 'Advanced Settings...' link is available. The 'ADDRESS AUTOCONFIGURATION SETTINGS' section includes 'Enable Automatic IPv6 Address Assignment:' with a toggle set to 'Enabled', 'Autoconfiguration Type:' with a dropdown set to 'SLAAC+Stateless DHCP', and 'Router Advertisement Lifetime:' with an input field set to '60' minutes. The footer contains the copyright notice 'COPYRIGHT © 2013 D-Link'.

Auto Configuration (SLAAC/DHCPv6)

This is a connection method where the ISP assigns your IPv6 address when your router requests one from the ISP's server. Some ISPs require you to make some settings on your side before your router can connect to the IPv6 Internet.

DNS Type: Select either **Obtain DNS server address automatically** or **Use the following DNS address**.

Primary DNS Server: If you selected **Use the following DNS address** above, enter the primary DNS server address.

Secondary DNS Server: If you selected **Use the following DNS address** above, enter the secondary DNS server address.

Enable DHCP-PD: Enable or disable prefix delegation services.

LAN IPv6 Address: If you disabled DHCP-PD, enter the LAN (local) IPv6 address for the router.

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

Enable Automatic IPv6 Address Assignment: Enable or disable the Automatic IPv6 Address Assignment feature.

Enable Automatic DHCP-PD in LAN: Enable or disable automatic DHCP-PD services.

The screenshot displays the D-Link DIR-859 IPv6 configuration interface. At the top, there's a navigation bar with 'Home', 'Settings', 'Advanced', and 'Management'. The main heading is 'IPv6', with a sub-note: 'All of your IPv6 Internet and network connection details are displayed on this page. [Click here for help.](#)' Below this, a breadcrumb trail shows 'Settings >> Internet >> IPv6'. A 'Save' button is visible in the top right. The 'My Internet Connection is:' dropdown is set to 'Auto Configuration'. Under 'IPv6 DNS SETTINGS', the 'DNS Type:' dropdown is set to 'Obtain a DNS server'. The 'LAN IPv6 ADDRESS SETTINGS' section shows 'Enable DHCP-PD:' as 'Enabled' and 'LAN IPv6 Link-Local Address:' as 'Not Available'. The 'ADDRESS AUTOCONFIGURATION SETTINGS' section shows 'Enable Automatic IPv6 Address Assignment:' as 'Enabled', 'Enable Automatic DHCP-PD in LAN:' as 'Enabled', 'Autoconfiguration Type:' as 'SLAAC+Stateless DHCP', and 'Router Advertisement Lifetime:' as '0 minutes'. A 'Copyright © 2013 D-Link' notice is at the bottom.

Auto Configuration DHCPv6. Select **Stateful (DHCPv6)**, **SLAAC + RDNSS** or **SLAAC + Stateless** Type:

Router Advertisement Lifetime: Enter the IPv6 address lifetime (in minutes).

Click **Save** when you are done.

The screenshot displays the IPv6 configuration interface of a D-Link DIR-859 router. The page is titled 'IPv6' and includes a navigation bar with 'Home', 'Settings', 'Advanced', and 'Management' tabs. The 'Settings' tab is active, and the breadcrumb trail shows 'Settings >> Internet >> IPv6'. A 'Save' button is located in the top right corner. The configuration is divided into several sections: 'My Internet Connection Is' is set to 'Auto Configuration'; 'IPv6 DNS SETTINGS' shows 'DNS Type' as 'Obtain a DNS server'; 'LAN IPv6 ADDRESS SETTINGS' shows 'Enable DHCP-PD' as 'Enabled' and 'LAN IPv6 Link-Local Address' as 'Not Available'; 'ADDRESS AUTOCONFIGURATION SETTINGS' shows 'Enable Automatic IPv6 Address Assignment' as 'Enabled', 'Enable Automatic DHCP-PD in LAN' as 'Enabled', 'Autoconfiguration Type' as 'SLAAC+Stateless DHCP', and 'Router Advertisement Lifetime' as 0 minutes. A 'COPYRIGHT © 2013 D-Link' notice is at the bottom.

PPPoE

Select **PPPoE** if your Internet connection requires you to enter a username and password. This information is provided by your Internet service provider (ISP).

PPPoE Session: Choose **Share with IPv4** to re-use your IPv4 PPPoE username and password, or **Create a new session**.

Username: If you selected **Create a new session** above, enter the PPPoE username provided by your ISP here.

Password: If you selected **Create a new session** above, enter the PPPoE password provided by your ISP here.

Address Mode: Select **Static IP** if your ISP assigned you the IP address, subnet mask, gateway, and DNS server addresses. In most cases, select **Dynamic IP**.

IP Address: Enter the IP address provided by your ISP (Static IP only).

MTU: Maximum Transmission Unit - you may need to change the MTU for optimal performance with your ISP.

DNS Type: Select either **Obtain DNS server address automatically** or **Use the following DNS address**.

Primary DNS Server: If you selected **Use the following DNS address** above, enter the primary DNS server address.

Secondary DNS Server: If you selected **Use the following DNS address** above, enter the secondary DNS server address.

Enable DHCP-PD: Enable or disable prefix delegation services.

The screenshot displays the D-Link IPv6 configuration interface. At the top, there's a navigation bar with 'Home', 'Settings', 'Advanced', and 'Management'. Below this, the 'IPv6' section is highlighted, with a subtitle stating 'All of your IPv6 Internet and network connection details are displayed on this page. [Click here for help.](#)'. The main configuration area is divided into several sections: 'Settings >> Internet >> IPv6' with a 'Save' button; 'My Internet Connection is:' set to 'PPPoE'; 'PPPoE Session:' set to 'Share with IPv4'; 'Address Mode:' set to 'Dynamic IP'; 'MTU:' set to '1492 bytes'; 'IPv6 DNS SETTINGS' with 'DNS Type:' set to 'Obtain a DNS server'; 'LAN IPv6 ADDRESS SETTINGS' with 'Enable DHCP-PD:' set to 'Enabled' and 'LAN IPv6 Link-Local Address:' as 'Not Available'; and 'ADDRESS AUTOCONFIGURATION SETTINGS' with 'Enable Automatic IPv6 Address Assignment:' and 'Enable Automatic DHCP-PD in LAN:' both set to 'Enabled', 'Autoconfiguration Type:' set to 'SLAAC+Stateless DHCP', and 'Router Advertisement Lifetime:' set to '0 minutes'. A copyright notice 'COPYRIGHT © 2013 D-Link' is at the bottom.

LAN IPv6 Address: Enter the LAN (local) IPv6 address for the router.


LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

Enable Automatic IPv6 Address Assignment: Enable or disable the Automatic IPv6 Address Assignment feature.

Auto Configuration Type: Select **Stateful (DHCPv6)**, **SLAAC + RDNSS** or **SLAAC + Stateless DHCPv6**.

Router Advertisement Lifetime: Enter the IPv6 address lifetime (in minutes).

Click **Save** when you are done.

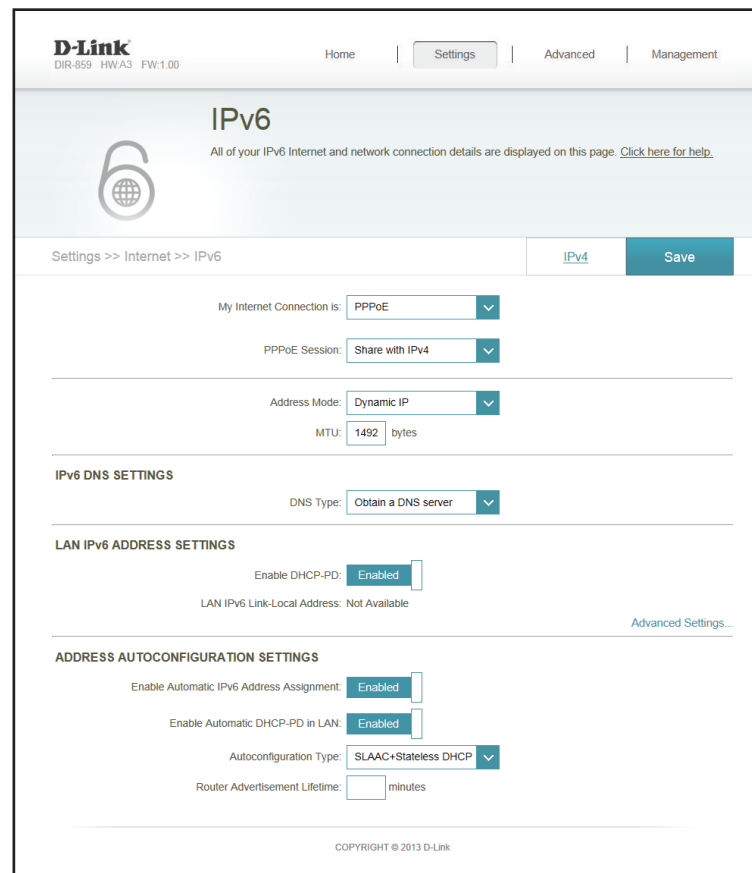

D-Link
DIR-859 HW:A3 FW:1.00

Home | Settings | Advanced | Management

IPv6

All of your IPv6 Internet and network connection details are displayed on this page. [Click here for help.](#)

Settings >> Internet >> IPv6 IPv4 **Save**

My Internet Connection Is: PPPoE

PPPoE Session: Share with IPv4

Address Mode: Dynamic IP

MTU: 1492 bytes

IPv6 DNS SETTINGS

DNS Type: Obtain a DNS server

LAN IPv6 ADDRESS SETTINGS

Enable DHCP-PD: Enabled

LAN IPv6 Link-Local Address: Not Available [Advanced Settings...](#)

ADDRESS AUTOCONFIGURATION SETTINGS

Enable Automatic IPv6 Address Assignment: Enabled

Enable Automatic DHCP-PD in LAN: Enabled

Autoconfiguration Type: SLAAC+Stateless DHCP

Router Advertisement Lifetime: minutes

COPYRIGHT © 2013 D-Link

IPv6 in IPv4 Tunnel

The user can configure the IPv6 connection to run in IPv4 Tunnel mode. IPv6 over IPv4 tunneling encapsulates IPv6 packets in IPv4 packets so that IPv6 packets can be sent over an IPv4 infrastructure.

Remote IPv4 Address: Enter the IPv4 remote address you will use.

Remote IPv6 Address: Enter the IPv6 remote address you will use.

Local IPv4 Address: Enter the IPv4 local address you will use.

Local IPv6 Address: Enter the IPv6 local address you will use.

Subnet Prefix Length: Enter the subnet prefix length supplied by your ISP.

DNS Type: Select either **Obtain DNS server address automatically** or **Use the following DNS address**.

Primary DNS Server: If you selected **Use the following DNS address** above, enter the primary DNS server address.

Secondary DNS Server: If you selected **Use the following DNS address** above, enter the secondary DNS server address.

Enable DHCP-PD: Enable or disable prefix delegation services.

LAN IPv6 Address: If you disabled DHCP-PD, enter the LAN (local) IPv6 address for the router.

The screenshot shows the D-Link DIR-859 IPv6 configuration interface. The page title is "IPv6" with a subtitle "All of your IPv6 Internet and network connection details are displayed on this page. [Click here for help.](#)". The breadcrumb trail is "Settings >> Internet >> IPv6". There are tabs for "IPv4" and "Save".

My Internet Connection is: IPv6 in IPv4 Tunnel (selected)

Remote IPv4 Address: [Text Field]

Remote IPv6 Address: [Text Field]

Local IPv4 Address: 172.17.5.47

Local IPv6 Address: [Text Field]

Subnet Prefix Length: [Text Field]

IPv6 DNS SETTINGS

DNS Type: Obtain a DNS server (selected)

LAN IPv6 ADDRESS SETTINGS

Enable DHCP-PD: Enabled (toggle)

LAN IPv6 Link-Local Address: Not Available

[Advanced Settings...](#)

ADDRESS AUTOCONFIGURATION SETTINGS

Enable Automatic IPv6 Address Assignment: Enabled (toggle)

Enable Automatic DHCP-PD in LAN: Enabled (toggle)

Autoconfiguration Type: SLAAC+Stateless DHCP (selected)

Router Advertisement Lifetime: 60 minutes

COPYRIGHT © 2013 D-Link

- LAN IPv6 Link-Local Address:

Displays the router’s LAN link-local address.
- Enable Automatic IPv6 Address Assignment:

Enable or disable the Automatic IPv6 Address Assignment feature.
- Enable Automatic DHCP-PD in LAN:

Enable or disable automatic DHCP-PD services.
- Auto Configuration Type:

Select **Stateful (DHCPv6)**, **SLAAC + RDNSS** or **SLAAC + Stateless DHCPv6**.
- Router Advertisement Lifetime:

Enter the IPv6 address lifetime (in minutes).

Click **Save** when you are done.

D-Link

DIR-859 HW/A3 FW:1.00

Home

Settings

Advanced

Management

IPv6

All of your IPv6 Internet and network connection details are displayed on this page. [Click here for help.](#)

Settings >> Internet >> IPv6

IPv4

Save

My Internet Connection is:

IPv6 in IPv4 Tunnel

Remote IPv4 Address:

Remote IPv6 Address:

Local IPv4 Address:

172.17.5.47

Local IPv6 Address:

Subnet Prefix Length:

IPv6 DNS SETTINGS

DNS Type:

Obtain a DNS server

LAN IPv6 ADDRESS SETTINGS

Enable DHCP-PD:

Enabled

LAN IPv6 Link-Local Address:

Not Available

[Advanced Settings...](#)

ADDRESS AUTOCONFIGURATION SETTINGS

Enable Automatic IPv6 Address Assignment:

Enabled

Enable Automatic DHCP-PD in LAN:

Enabled

Autoconfiguration Type:

SLAAC+Stateless DHCP

Router Advertisement Lifetime:

60

minutes

COPYRIGHT © 2013 D-Link

6to4

In this section the user can configure the IPv6 6 to 4 connection settings. 6to4 is an IPv6 address assignment and automatic tunneling technology that is used to provide unicast IPv6 connectivity between IPv6 sites and hosts across the IPv4 Internet.

6 to 4 Address: Displays the 6 to 4 address.

6 to 4 Relay: Enter the 6 to 4 relay supplied by your ISP.

Primary DNS Server: Enter the primary DNS server address.

Secondary DNS Server: Enter the secondary DNS server address.

LAN IPv6 Address: Enter the LAN (local) IPv6 address for the router.

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

Enable Automatic IPv6 Address Assignment: Check to enable the Automatic IPv6 Address Assignment feature.

Auto Configuration Type: Select **Stateful (DHCPv6)**, **SLAAC + RDNSS** or **SLAAC + Stateless DHCPv6**.

Router Advertisement Lifetime: Enter the IPv6 address lifetime (in minutes).

Click **Save** when you are done.

The screenshot shows the D-Link DIR-859 IPv6 configuration interface. At the top, there's a navigation bar with 'Home', 'Settings', 'Advanced', and 'Management'. The main heading is 'IPv6' with a subtitle: 'All of your IPv6 Internet and network connection details are displayed on this page. [Click here for help.](#)' Below this is a breadcrumb trail: 'Settings >> Internet >> IPv6'. There are two tabs: 'IPv4' and 'IPv6', with 'IPv6' being the active tab. A 'Save' button is located to the right of the tabs. The main configuration area is titled 'My Internet Connection is:' and has a dropdown menu set to '6to4'. Below this, there are fields for '6to4 Address' (displaying '172.17.5.47'), '6to4 Relay', 'Primary DNS Server', and 'Secondary DNS Server'. A section titled 'LAN IPv6 ADDRESS SETTINGS' contains a 'LAN IPv6 Address' field (displaying 'FFFF:FFFF:FFFF::1 /64') and a 'LAN IPv6 Link-Local Address' field (displaying 'Not Available'). An 'Advanced Settings...' link is to the right. Another section titled 'ADDRESS AUTOCONFIGURATION SETTINGS' has a toggle for 'Enable Automatic IPv6 Address Assignment' set to 'Enabled', an 'Autoconfiguration Type' dropdown set to 'SLAAC+Stateless DHCP', and a 'Router Advertisement Lifetime' field set to 'minutes'. The footer says 'COPYRIGHT © 2013 D-Link'.

6rd

In this section the user can configure the IPv6 6rd connection settings.

Assign IPv6 Prefix: Currently unsupported.

Primary DNS Server: Enter the primary DNS server address.

Secondary DNS Server: Enter the secondary DNS server address.

Enable Hub and Spoke Mode: Enable if you want to minimize the number of routes to the destination by using a hub and spoke method of networking.

6rd Configuration: Choose the **6rd DHCPv4 Option** to automatically discover and populate the data values, or **Manual Configuration** to enter the settings yourself.

6rd IPv6 Prefix: Enter the 6rd IPv6 prefix and mask length supplied by your ISP (manual configuration only).

6rd Border Relay IPv4 Address: Enter the 6rd border relay IPv4 address settings supplied by your ISP (manual configuration only).

LAN IPv6 Address: Enter the LAN (local) IPv6 address for the router.

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

The screenshot shows the D-Link DIR-859 web interface for IPv6 6rd configuration. The top navigation bar includes 'Home', 'Settings', 'Advanced', and 'Management'. The main heading is 'IPv6' with a sub-note: 'All of your IPv6 Internet and network connection details are displayed on this page. [Click here for help.](#)'

The breadcrumb trail is 'Settings >> Internet >> IPv6'. There are tabs for 'IPv4' and 'Save'. The 'My Internet Connection is:' dropdown is set to '6rd'.

Below this are input fields for 'Assign IPv6 Prefix:', 'Primary DNS Server:', and 'Secondary DNS Server:'.

The '6RD MANUAL CONFIGURATION' section has a toggle for 'Enable Hub and Spoke Mode' set to 'Enabled' and a dropdown for '6rd Configuration' set to '6rd DHCPv4 Option'.

The 'LAN IPv6 ADDRESS SETTINGS' section shows 'LAN IPv6 Address: Not Available' and 'LAN IPv6 Link-Local Address: Not Available'. There is a link for 'Advanced Settings...'.

The 'ADDRESS AUTOCONFIGURATION SETTINGS' section has a toggle for 'Enable Automatic IPv6 Address Assignment' set to 'Enabled', a dropdown for 'Autoconfiguration Type' set to 'SLAAC+Stateless DHCP', and a field for 'Router Advertisement Lifetime' set to 'minutes'.

At the bottom, it says 'COPYRIGHT © 2013 D-Link'.

Enable Automatic IPv6 Address Assignment: Check to enable the Automatic IPv6 Address Assignment feature.

Auto Configuration Type: Select **Stateful (DHCPv6)**, **SLAAC + RDNSS** or **SLAAC + Stateless DHCPv6**.

Router Advertisement Lifetime: Enter the IPv6 address lifetime (in minutes).

Click **Save** when you are done.

The screenshot displays the IPv6 configuration interface of a D-Link DIR-859 router. The top navigation bar includes 'Home', 'Settings', 'Advanced', and 'Management'. The main heading is 'IPv6', with a sub-note: 'All of your IPv6 Internet and network connection details are displayed on this page. [Click here for help.](#)'

The configuration is organized into several sections:

- Settings >> Internet >> IPv6**: A breadcrumb trail with a 'Save' button.
- My Internet Connection Is:** A dropdown menu set to '6rd'.
- Assign IPv6 Prefix:** An empty text input field.
- Primary DNS Server:** An empty text input field.
- Secondary DNS Server:** An empty text input field.
- 6RD MANUAL CONFIGURATION**:
 - Enable Hub and Spoke Mode:** A toggle switch set to 'Enabled'.
 - 6rd Configuration:** A dropdown menu set to '6rd DHCPv4 Option'.
- LAN IPv6 ADDRESS SETTINGS**:
 - LAN IPv6 Address:** Not Available
 - LAN IPv6 Link-Local Address:** Not Available
 - [Advanced Settings...](#)
- ADDRESS AUTOCONFIGURATION SETTINGS**:
 - Enable Automatic IPv6 Address Assignment:** A toggle switch set to 'Enabled'.
 - Autoconfiguration Type:** A dropdown menu set to 'SLAAC+Stateless DHCPv6'.
 - Router Advertisement Lifetime:** A text input field set to '180' minutes.

The footer of the page states 'COPYRIGHT © 2013 D-Link'.

Local Connectivity Only

Local Connectivity Only allows you to set up an IPv6 connection that will not connect to the Internet.

Enable ULA: Click here to enable Unique Local IPv6 Unicast Addresses settings.

Use Default ULA Prefix: Checking this box will automatically configure the ULA prefix for the default setting.

ULA Prefix: If you wish to choose your own ULA prefix, enter it here.

Current IPv6 ULA Settings: This section will display the current settings for your IPv6 ULA.

Click **Save** when you are done.

The screenshot shows the D-Link web interface for the DIR-859 router. The top navigation bar includes 'Home', 'Settings', 'Advanced', and 'Management'. The main heading is 'IPv6', with a subtext: 'All of your IPv6 Internet and network connection details are displayed on this page. [Click here for help.](#)' Below this, the breadcrumb 'Settings >> Internet >> IPv6' is shown, along with tabs for 'IPv4' and 'Save'. A dropdown menu for 'My Internet Connection is:' is set to 'Local Connectivity Only'. A link for 'Advanced Settings...' is visible. The 'IPv6 ULA SETTINGS' section contains two toggle switches, both set to 'Enabled': 'Enable ULA' and 'Use Default ULA Prefix'. The 'CURRENT IPv6 ULA SETTINGS' section shows 'Current ULA Prefix: Not Available' and 'LAN IPv6 ULA: Not Available'. The footer indicates 'COPYRIGHT © 2013 D-Link'.


Internet

In the Settings menu on the bar on the top of the page, click **Internet** to see the Internet configuration options.

My Internet Connection Is: Choose your Internet connection type from the drop-down menu. You will be presented with the appropriate options for your connection type. Click **Advanced Settings...** to expand the list and see all of the options.

For **Dynamic IP (DCHP)** on page 51.

For **Static IP** on page 52.

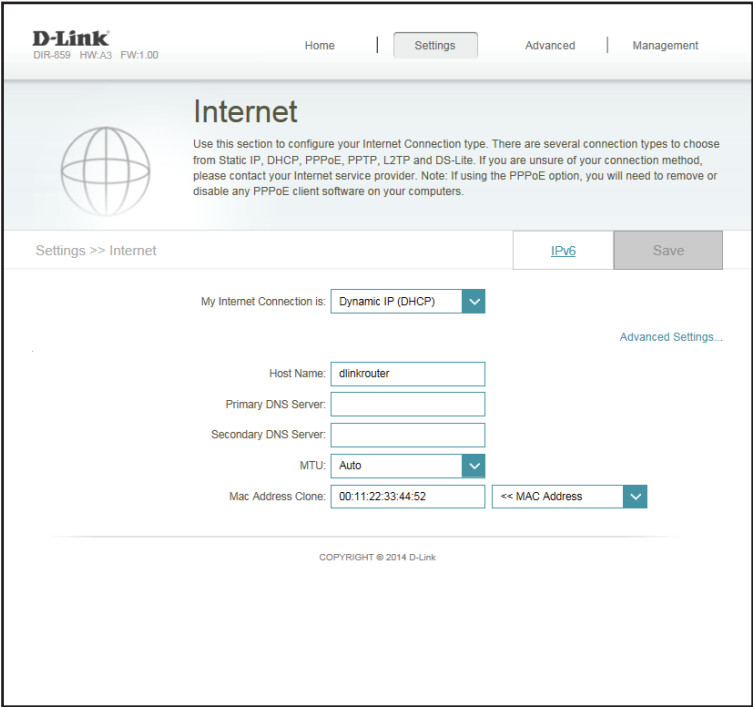

Dynamic IP (DCHP)

Select **Dynamic IP (DHCP)** to obtain IP address information automatically from your Internet Service Provider (ISP). Select this option if your ISP does not give you an IP address to use.

Host Name: The host name is optional but may be required by some ISPs. Leave it blank if you are not sure.

Primary DNS Server: Enter the primary DNS server IP address assigned by your ISP. This address is usually obtained automatically from your ISP.

Secondary DNS Server: Enter the secondary DNS server IP address assigned by your ISP. This address is usually obtained automatically from your ISP.

MTU: Maximum Transmission Unit - you may need to change the MTU for optimal performance with your ISP.

Click **Save** when you are done.

The screenshot shows the D-Link web interface for the DIR-859 router. The top navigation bar includes 'Home', 'Settings', 'Advanced', and 'Management'. The 'Settings' tab is active. The main content area is titled 'Internet' and contains a globe icon. Below the title, there is a note about configuring the Internet Connection type. The 'My Internet Connection is:' dropdown is set to 'Dynamic IP (DHCP)'. Below this, there are input fields for 'Host Name' (dlinkrouter), 'Primary DNS Server', and 'Secondary DNS Server'. The 'MTU' is set to 'Auto'. The 'Mac Address Clone' field shows '00:11:22:33:44:52' and a '<< MAC Address' button. A 'Save' button is located at the bottom right. The footer indicates 'COPYRIGHT © 2014 D-Link'.

Static IP

Select **Static IP** if your IP information is provided by your Internet service provider (ISP).

IP Address: Enter the IP address provided by your ISP.

Subnet Mask: Enter the subnet mask provided by your ISP.

Default Gateway: Enter the default gateway address provided by your ISP.

Primary DNS Server: Enter the primary DNS server IP address assigned by your ISP.

Secondary DNS Server: Enter the secondary DNS server IP address assigned by your ISP.

MTU: Maximum Transmission Unit - you may need to change the MTU for optimal performance with your ISP.

Click **Save** when you are done.

The screenshot shows the D-Link DIR-859 web interface. At the top, there's a navigation bar with 'Home', 'Settings', 'Advanced', and 'Management'. The 'Settings' tab is selected. Below the navigation bar, the 'Internet' section is active, featuring a globe icon and a brief explanation of connection types. The 'Settings >> Internet' breadcrumb is visible. A 'Save' button is in the top right. The main configuration area includes a dropdown for 'My Internet Connection is:' set to 'Static IP'. Below this are input fields for 'IP Address', 'Subnet Mask', 'Default Gateway', and 'Primary DNS Server'. Further down are fields for 'Secondary DNS Server', 'MTU' (set to 'Auto'), and 'Mac Address Clone' (set to '00:11:22:33:44:52'). A '<< MAC Address' dropdown is also present. An 'Advanced Settings...' link is on the right. The footer indicates 'COPYRIGHT © 2014 D-Link'.

Wireless

In the Settings menu on the bar on the top of the page, click **Wireless** to see the wireless configuration options. To configure the router's guest zone, click the **Guest Zone** link. Refer to **Guest Zone** on page 55 for details. Click **Advanced Settings...** to expand the list and see all of the options. The following options apply to both the 2.4 GHz and the 5 GHz wireless frequency bands:

Status: Enable or disable the wireless frequency band.

Wi-Fi Name (SSID): Create a name for your wireless network using up to 32 characters.

Password: Create a password to use for wireless security. Wireless clients will need to enter this password to successfully connect to the network.

Security Mode: Choose **None**, **WEP**, or **WPA/WPA2-(Personal)** (recommended).

802.11 Mode: Select the desired wireless networking standards to use. The available options will depend on the wireless frequency band, as well as the currently selected security mode.

Wi-Fi Channel: Select the desired channel. The default is **Auto** (recommended).

Transmission Power: Select the desired wireless transmission power.

Channel Width: Select **Auto 20/40** if you are using both 802.11n and non-802.11n wireless devices, or select **20 MHz** if you are not using any 802.11n wireless clients.

HT20/40 Coexistence: Enable this option to reduce interference from other wireless networks in your area. If the channel width is operating at 40 MHz and there is another wireless network's channel over-lapping and causing interference, the router will automatically change to 20 MHz.

The screenshot displays the D-Link Wireless configuration interface. At the top, there's a navigation bar with 'Home', 'Settings', 'Advanced', and 'Management'. The 'Wireless' section is active, showing a warning to update the device after changes. Below this, the 'Settings >> Wireless' breadcrumb is shown, along with a 'Guest Zone' link and a 'Save' button. The configuration is divided into two main sections: 2.4GHz and 5GHz. The 2.4GHz section is expanded, showing various settings: Status (Enabled), Wi-Fi Name (SSID) (dlink), Password (asdfasdf), Security Mode (WPA-Personal), 802.11 Mode (Mixed 802.11b/g/n), Wi-Fi Channel (Auto), Transmission Power (High), Channel Width (Auto 20/40 MHz), HT20/40 Coexistence (Enabled), Visibility Status (Visible), and Schedule (Always Enable). The 5GHz section is partially visible below, showing similar settings. An 'Advanced Settings...' link is present next to the main settings for each band. The footer indicates 'COPYRIGHT © 2014 D-Link'.

Visibility Status: The default setting is **Visible**. Select **Invisible** if you do not want to broadcast the SSID of your wireless network.

Schedule: Use the drop-down menu to select the time schedule that the rule will be enabled on. The schedule may be set to **Always Enable**, or you can create your own schedules in the **Schedules** section (refer to page 69).

Click **Save** when you are done.

DIR-859

HW:A3

FW:1.00

Home

Settings

Advanced

Management

Wireless

Use this section to configure the wireless settings for your D-Link Router. Please make sure that any changes made in this section will need to be updated on your wireless device.

Settings >> Wireless

[Guest Zone](#)

Save

2.4GHz

Status:

Enabled

Wi-Fi Name (SSID):

dlink

Password:

asdfasdf

Advanced Settings...

Security Mode:

WPA-Personal

802.11 Mode:

Mixed 802.11b/g/n

Wi-Fi Channel:

Auto

Transmission Power:

High

Channel Width:

Auto 20/40 MHz

HT20/40 Coexistence:

Enabled

Visibility Status:

Visible

Schedule:

Always Enable

5GHz

Status:

Enabled

Wi-Fi Name (SSID):

dlink-5GHz

Password:

asdfasdf

Advanced Settings...

Security Mode:

WPA-Personal

802.11 Mode:

Mixed 802.11a/n/ac

Wi-Fi Channel:

Auto

Transmission Power:

High

Channel Width:

Auto 20/40/80 MHz

Visibility Status:

Visible

Schedule:

Always Enable

COPYRIGHT © 2014 D-Link

Guest Zone

The guest zone feature will allow you to create temporary zones that can be used by guests to access the Internet. These zones will be separate from your main wireless network. You may configure different zones for the 2.4 GHz and 5 GHz wireless bands.

In the Settings menu on the bar on the top of the page, click **Wireless**, then click the **Guest Zone** link. Click **Advanced Settings...** to expand the list and see all of the options. The following options apply to both the 2.4 GHz and the 5 GHz wireless frequency bands:

Status: Enable or disable the guest zone for each wireless frequency band.

Wi-Fi Name (SSID): Enter a wireless network name (SSID) that is different from your main wireless network.

Password: Create a password to use for wireless security. Wireless clients will need to enter this password to successfully connect to the guest zone.

Internet Access Only: Enabling this option will confine connectivity to the Internet, disallowing guests from accessing other local network devices.

Click **Save** when you are done.

D-Link
DIR-859 HW:A3 FW:1.00

Home | Settings | Advanced | Management

Guest Zone

This page lets you enable and configure a Wi-Fi Guest Zone. Users connected to a Guest Zone cannot communicate or detect devices on your home network unless Internet Access Only is disabled under Home Network Access. [Click here for help.](#)

Settings >> Wireless >> Guest Zone Wi-Fi Save

2.4GHz

Status: ☒ Enabled

Wi-Fi Name (SSID):

Password:

5GHz

Status: ☒ Enabled

Wi-Fi Name (SSID):

Password:

Home Network Access

Internet Access Only: ☒ Enabled

COPYRIGHT © 2013 D-Link

Network

This section will allow you to change the local network settings of the router and to configure the DHCP settings. In the Settings menu on the bar on the top of the page, click **Network**. Click **Advanced Settings...** to expand the list and see all of the options.

LAN IP Address: Enter the IP address of the router. The default IP address is **192.168.0.1**.

If you change the IP address, once you click **Save**, you will need to enter the new IP address in your browser to get back into the configuration utility.

Subnet Mask: Enter the subnet mask of the router. The default subnet mask is **255.255.255.0**.

Management Link: The default address to access the router's configuration is **http://dlinkrouter.local**. Here, you can replace **dlinkrouter** with a name of your choice.

Local Domain Name: Enter the domain name (optional).

Enable DNS Relay: Disable to transfer the DNS server information from your ISP to your computers. If enabled, your computers will use the router for a DNS server.

Status: Enable or disable the DHCP server.

DHCP IP Address Range: Enter the starting and ending IP addresses for the DHCP server's IP assignment.

Note: If you statically (manually) assign IP addresses to your computers or devices, make sure the IP addresses are outside of this range or you may have an IP conflict.

D-Link
DIR-859 HW: A3 FW: 1.00

Home | Settings | Advanced | Management

Network

Use this section to configure the network settings for your device. You can enter a name for your device in the management link field, and use the link to access web UI in a web browser. We recommend you change the management link if there are more than one D-Link devices within the network. [Click here for help.](#)

Settings >> Network Save

Network Settings

LAN IP Address:

Subnet Mask:

Management Link:

Local Domain Name:

Enable DNS Relay: ☒ Enabled

[Advanced Settings...](#)

DHCP Server

Status: ☒ Enabled

DHCP IP Address Range: to

DHCP Lease Time: minutes

Always Broadcast: ☐ Disabled
(compatibility for some DHCP Clients)

Advanced Settings

WAN Port Speed: ▼

UPnP: ☒ Enabled

IPv4 Multicast Streams: ☐ Disabled

IPv6 Multicast Streams: ☐ Disabled

COPYRIGHT © 2013 D-Link

DHCP Lease Time: Enter the length of time for the IP address lease in minutes.

Always Broadcast: Enable this feature to broadcast your networks DHCP server to LAN/WLAN clients.

WAN Port Speed: You may set the port speed of the Internet port to 10 Mbps, 100 Mbps, 1000 Mbps, or Auto (recommended).

UPnP: Enable or disable Universal Plug and Play (UPnP). UPnP provides compatibility with networking equipment, software and peripherals.

IPv4 Multicast Stream: Enable to allow IPv4 multicast traffic to pass through the router from the Internet.

IPv6 Multicast Stream: Enable to allow IPv6 multicast traffic to pass through the router from the Internet.

Click **Save** when you are done.

D-Link
DIR-859 HW:V3 FW:1.00

Home | Settings | Advanced | Management

Network

Use this section to configure the network settings for your device. You can enter a name for your device in the management link field, and use the link to access web UI in a web browser. We recommend you change the management link if there are more than one D-Link devices within the network. [Click here for help.](#)

Settings >> Network Save

Network Settings

LAN IP Address: 192.168.0.1
Subnet Mask: 255.255.255.0
Management Link: http://dlinkrouter.local/
Local Domain Name:
Enable DNS Relay: ☒

[Advanced Settings...](#)

DHCP Server

Status: ☒ Enabled
DHCP IP Address Range: 192.168.0.100 to 192.168.0.199
DHCP Lease Time: 10080 minutes
Always Broadcast: ☐ Disabled
(compatibility for some DHCP Clients)

Advanced Settings

WAN Port Speed: Auto
UPnP: ☒ Enabled
IPv4 Multicast Streams: ☐ Disabled
IPv6 Multicast Streams: ☐ Disabled

COPYRIGHT © 2013 D-Link

Advanced QoS Engine

This section will allow you to prioritize particular clients over others, so that those clients receive higher bandwidth. For example, if one client is streaming a movie and another is downloading a non-urgent file, you might wish to assign the former device a higher priority than the latter so that the movie streaming is not disrupted by the traffic of the other devices on the network.

In the Features menu on the bar on the top of the page, click **QoS Engine**.

Under All Devices, you will see device cards representing each connected client. If some are off-screen, you can use the < and > buttons to scroll through the cards.

A maximum of **one** device can be assigned **Highest** priority.



A maximum of **two** devices can be assigned **High** priority.

A maximum of **eight** devices can be assigned **Medium** priority.

If no devices are explicitly assigned a priority, they will all be treated with equal priority. If some devices are not assigned a priority and others are, the unassigned devices will be treated with the lowest priority.

To assign a priority level to a device, drag the device card from the All Devices list over an empty slot and release the mouse button. The card will remain in the slot. If you want to remove a priority assignment from a device and return it to the All Devices list, click the cross icon in the top right of the device card.

Click **Save** when you are done.

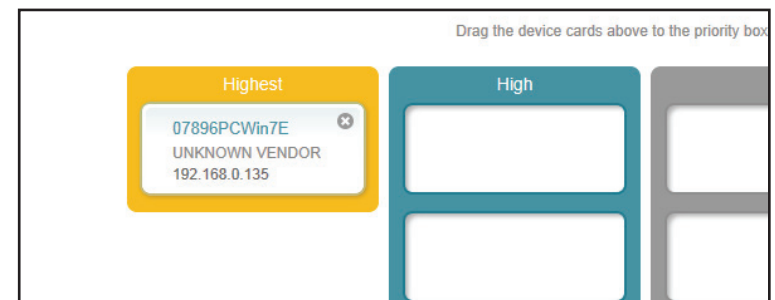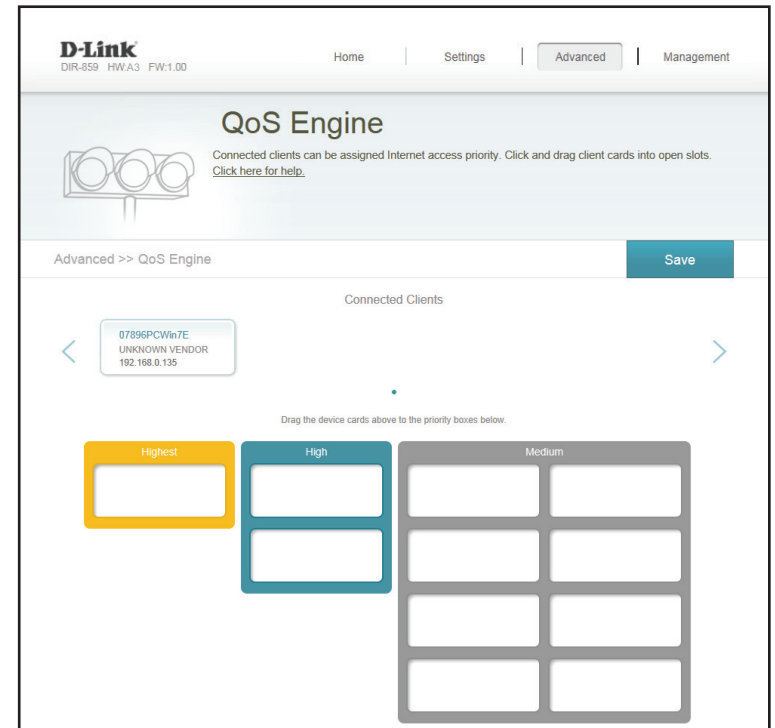

Firewall Settings

The router's firewall protects your network from malicious attacks over the Internet. In the Advanced menu on the bar on the top of the page, click **Firewall Settings**. Click **Advanced Settings...** to expand the list and see all of the options.

Enable DMZ: Enable or disable Demilitarized Zone (DMZ). This completely exposes the client to threats over the Internet, and is not recommended in ordinary situations.

DMZ IP Address: If you enabled DMZ, enter the IP address of the client you wish to expose, or use the drop-down menu to quickly select it.


Enable SPI IPv4: Enabling Stateful Packet Inspection (SPI) helps to prevent cyber attacks by validating that the traffic passing through the session conforms to the protocol.

Enable Anti-Spoof Checking: Enable this feature to protect your network from certain kinds of "spoofing" attacks.

IPv6 Simple Security: Enable or disable IPv6 simple security.

IPv6 Ingress Filtering: Enable or disable IPv6 ingress filtering.

PPTP: Allows multiple machines on the LAN to connect to their corporate network using the PPTP protocol.

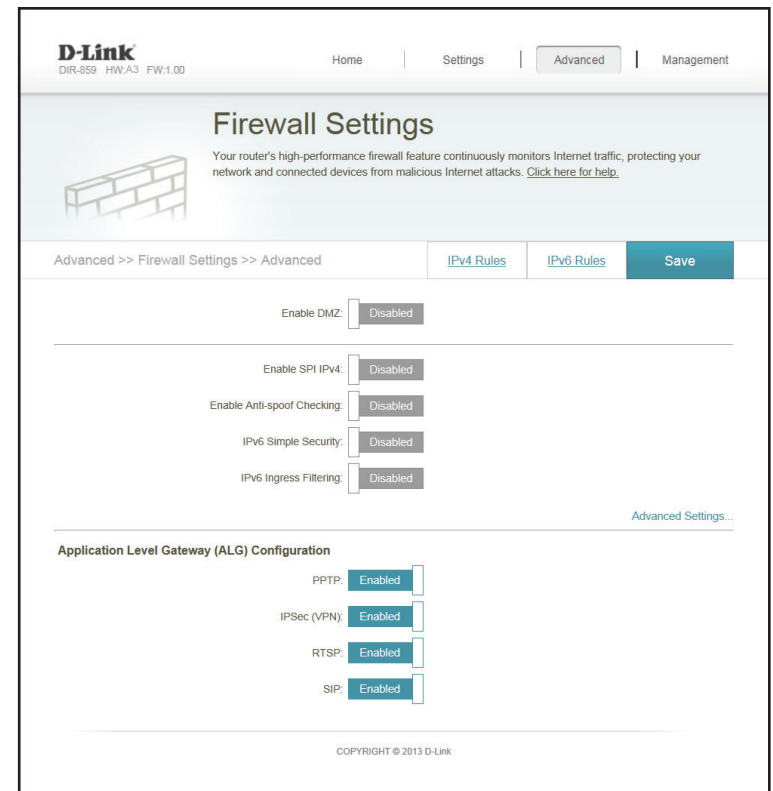


IPSec (VPN): Allows multiple VPN clients to connect to their corporate network using IPSec. Some VPN clients support traversal of IPSec through NAT. This Application Level Gateway (ALG) may interfere with the operation of such VPN clients. If you are having trouble connecting with your corporate network, try turning this ALG off. Please check with the system administrator of your corporate network whether your VPN client supports NAT traversal.

RTSP: Allows applications that uses Real Time Streaming Protocol (RTSP) to receive streaming media from the Internet.

SIP: Allows devices and applications using VoIP (Voice over IP) to communicate across NAT. Some VoIP applications and devices have the ability to discover NAT devices and work around them. This ALG may interfere with the operation of such devices. If you are having trouble making VoIP calls, try turning this ALG off.

Click **Save** when you are done.

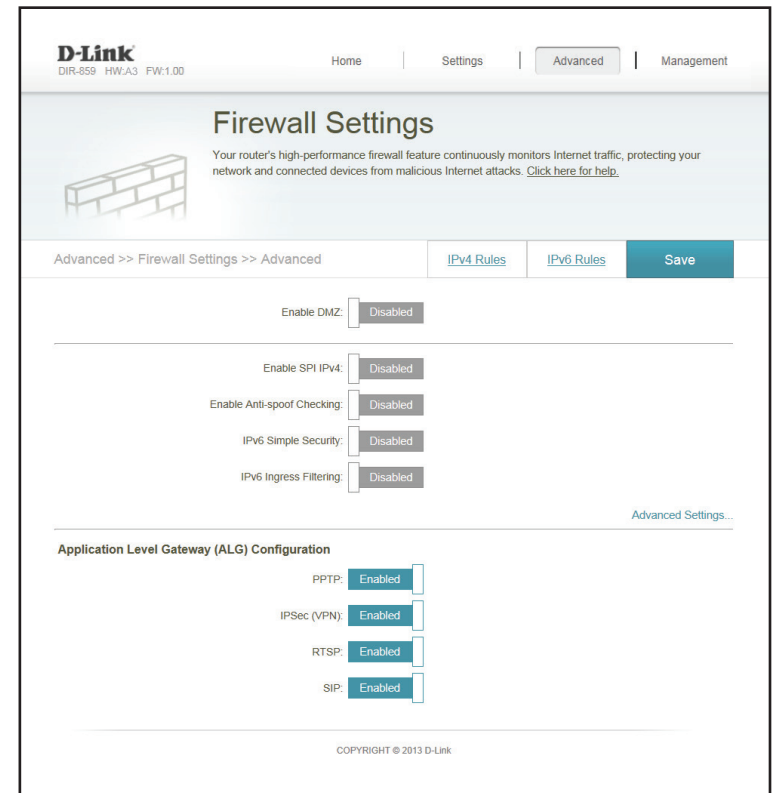

D-Link
DIR-859 HW: A3 FW: 1.00

Home | Settings | **Advanced** | Management

Firewall Settings

Your router's high-performance firewall feature continuously monitors Internet traffic, protecting your network and connected devices from malicious Internet attacks. [Click here for help.](#)

Advanced >> Firewall Settings >> Advanced

[IPv4 Rules](#) | [IPv6 Rules](#) | **Save**

Enable DMZ: ☐ Disabled

Enable SPI IPv4: ☐ Disabled

Enable Anti-spoof Checking: ☐ Disabled

IPv6 Simple Security: ☐ Disabled

IPv6 Ingress Filtering: ☐ Disabled

[Advanced Settings...](#)

Application Level Gateway (ALG) Configuration

PPTP: ☒ Enabled

IPSec (VPN): ☒ Enabled

RTSP: ☒ Enabled

SIP: ☒ Enabled

COPYRIGHT © 2013 D-Link

IPv4/IPv6 Rules

The IPv4/IPv6 Rules section is an advanced option that lets you configure what kind of traffic is allowed to pass through the network. To configure the IPv4 rules, from the Firewall Settings page click **IPv4 Rules**. To configure IPv6 rules, from the Firewall Settings page click **IPv6 Rules**. To return to the main Firewall Settings page, click **Security Check**.

To begin, use the drop-down menu to select whether you want to **ALLOW** or **DENY** the rules you create. You can also choose to turn filtering **OFF**.

If you wish to remove a rule, click on its trash can icon in the Delete column. If you wish to edit a rule, click on its pencil icon in the Edit column. If you wish to create a new rule, click the **Add Rules** button. Click **Save** when you are done. If you edit or create a rule, the following options will appear:

Name: Enter a name for the rule.

Source IP Address Range: Enter the source IP address range that the rule will apply to, and using the drop-down menu, specify whether it is a **WAN** or **LAN** IP address.

Destination IP Address Range: Enter the destination IP address range that the rule will apply to, and using the drop-down menu, specify whether it is a **WAN** or **LAN** IP address.

Port Range: Select the protocol of the traffic to allow or deny (**Any**, **TCP**, or **UDP**) and then enter the range of ports that the rule will apply to.

Schedule: Use the drop-down menu to select the time schedule that the rule will be enabled on. The schedule may be set to **Always Enable**, or you can create your own schedules in the **Schedules** section (refer to page 69).

Click **OK** when you are done.

The screenshot shows the D-Link Firewall Settings page. At the top, there are tabs for 'Home', 'Settings', 'Advanced', and 'Management'. The 'Advanced' tab is selected. Below the tabs, there's a section for 'Firewall Settings' with a sub-header 'The IPv4 rule section is an advance feature used to deny or allow traffic from passing through the device. Click here for help.' Below this, there's a breadcrumb trail: 'Advanced >> Firewall Settings >> IPv4 Rules'. There are buttons for 'Advanced', 'IPv6 Rules', and 'Save'. A dropdown menu shows 'Turn IPv4 Filtering ON and DENY rules listed'. Below this is a table with columns: Name, Schedule, Edit, and Delete. The table contains one rule named 'My Rule' with a schedule of 'Always Enable'. There are buttons for 'Add Rule' and 'Remaining: 9'. At the bottom, it says 'COPYRIGHT © 2013 D-Link'.

The screenshot shows the 'Create New Rule' dialog box. It has a close button (X) in the top right corner. The fields are: Name (text input), Source IP Address Range (dropdown menu set to 'WAN' with a text input field), Destination IP Address Range (dropdown menu set to 'WAN' with a text input field), Port Range (dropdown menu set to 'TCP' with a text input field), and Schedule (dropdown menu set to 'Always Enable'). There is an 'Apply' button at the bottom.

Port Forwarding

Port forwarding allows you to specify a port or range of ports to open for specific devices on the network. This might be necessary for certain applications to connect through the router. In the Advanced menu on the bar on the top of the page, click **Port Forwarding**.

If you wish to remove a rule, click on its trash can icon in the Delete column. If you wish to edit a rule, click on its pencil icon in the Edit column. If you wish to create a new rule, click the **Add Rules** button. Click **Save** when you are done. If you edit or create a rule, the following options will appear:

Name: Enter a name for the rule.

Local IP: Enter the IP address of the computer on your local network that you want to allow the incoming service to. Alternatively, select the device from the drop-down menu.

TCP Port: Enter the TCP ports that you want to open. You can enter a single port or a range of ports. Separate ports with a comma (for example: 24,1009,3000-4000).

UDP Port: Enter the UDP ports that you want to open. You can enter a single port or a range of ports. Separate ports with a comma (for example: 24,1009,3000-4000).

Schedule: Use the drop-down menu to select the time schedule that the rule will be enabled on. The schedule may be set to **Always Enable**, or you can create your own schedules in the **Schedules** section (refer to page 69).

Click **OK** when you are done.

D-Link
DIR-859 HWA3 FW:1.00

Home | Settings | **Advanced** | Management

Port Forwarding

Your router helps share a single IP address assigned by your ISP among several clients in your home. Port forwarding allows traffic requests from a specified application to be directed to a specified client inside. [Click here for help.](#)

Advanced >> Port Forwarding Virtual Server Save

Status	Name	Local IP	TCP Port	UDP Port	Schedule	Edit	Delete
<input checked="" type="checkbox"/>	My Rule	192.168.0.135	5970	5970	Always Enable		

Add Rule Remaining: 9

COPYRIGHT © 2013 D-Link

Create New Rule

Name:

Local IP: << Computer Name

TCP Port:

UDP Port:

Schedule: Always Enable

Apply

Website Filter


The website filter settings allow you to block access to certain web sites. You can either create a list of sites to block, or create a list of sites to allow (with all other sites being blocked).

In the Advanced menu on the bar on the top of the page, click **Website Filter**.

If you want to create a list of sites to block, select **DENY computers access to ONLY these sites** from the drop-down menu. All other sites will be accessible. If you want to specify a list of sites to allow, select **ALLOW computers access to ONLY these sites** from the drop-down menu. All other sites will be blocked.

You may specify a maximum of fifteen web sites. To add a new site to the list, click **Create New Rule**. Next, under Website URL/Domain enter the URL or domain. If you wish to remove a rule, click on its trash can icon in the Delete column. If you wish to edit a rule, simply replace the URL or domain.

Click **Save** when you are done.

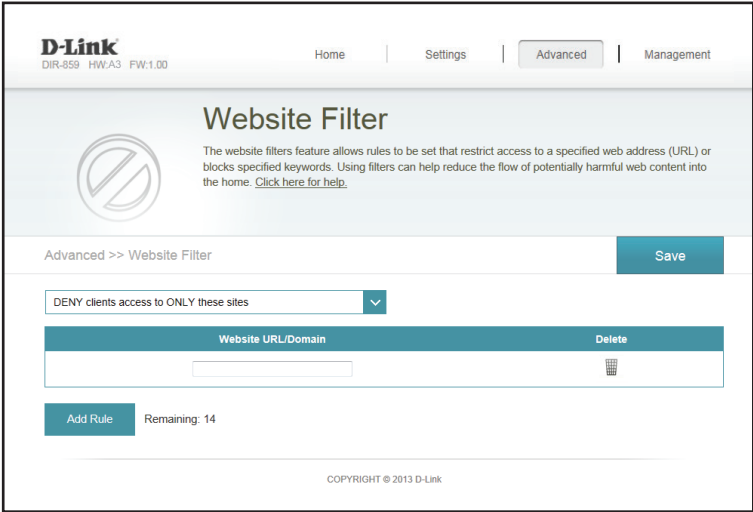

Static Routes

The Static Routes section allows you to define custom routes to control how data traffic is moved around your network.

In the Advanced menu on the bar on the top of the page, click **Static Routes**. To configure IPv6 rules, click **IPv6** and refer to page 65. To return to the main IPv4 static routes page, click **IPv4**.

If you wish to remove a rule, click on its trash can icon in the Delete column. If you wish to edit a rule, click on its pencil icon in the Edit column. If you wish to create a new rule, click the **Add Rules** button. Click **Save** when you are done. If you edit or create a rule, the following options will appear:

Name: Enter a name for the rule.

Destination IP: Enter the IP address of packets that will take this route.

Netmask: Enter the netmask of the route.

Gateway: Enter your next hop gateway to be taken if this route is used.

Metric: The route metric is a value from 1 to 16 that indicates the cost of using this route. A value 1 is the lowest cost and 15 is the highest cost.

Interface: Select the interface that the IP packet must use to transit out of the router when this route is used.

Click **OK** when you are done.

IPv6

To configure IPv6 rules, on the Static Routes page click **IPv6**. To return to the main IPv4 static routes page, click **IPv4**.

If you wish to remove a rule, click on its trash can icon in the Delete column. If you wish to edit a rule, click on its pencil icon in the Edit column. If you wish to create a new rule, click the **Add Rules** button. Click **Save** when you are done. If you edit or create a rule, the following options will appear:

Name: Enter a name for the rule.

DestNetwork: This is the IP address of the router used to reach the specified destination.


PrefixLen: Enter the IPv6 address prefix length of the packets that will take this route.

Gateway: Enter the IP address of the gateway.

Metric: Enter the metric value for this rule here.

Interface: Select the interface that the IP packet must use to transit out of the router when this route is used.

Click **OK** when you are done.

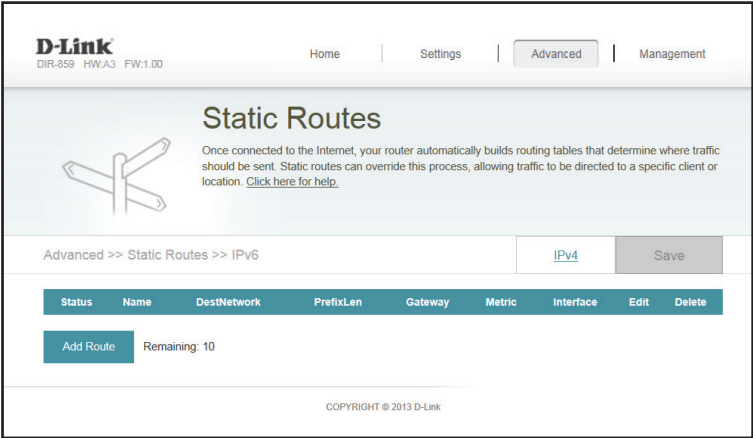

Create New Route

Name:

DestNetwork:

PrefixLen:

Gateway:

Metric:

Interface:

WAN

Apply

Dynamic DNS

Most Internet Service Providers (ISPs) assign dynamic (changing) IP addresses. Using a dynamic DNS service provider, people can enter your domain name in their web browser to connect to your server no matter what your IP address is.

In the Advanced menu on the bar on the top of the page, click **Dynamic DNS**.

Enable Dynamic DNS: Enabling dynamic DNS will reveal further configuration options.

Status: Displays the current dynamic DNS connection status.

Server Address: Enter the address of your dynamic DNS server, or select one from the drop-down menu.

Host Name: Enter the host name that you registered with your dynamic DNS service provider.

User Name: Enter your dynamic DNS username.

Password: Enter your dynamic DNS password.

Time Out: Enter a timeout time (in hours).

Click **Save** when you are done.

At the bottom of the page are the IPv6 host settings. To configure an IPv6 dynamic DNS host, refer to **IPv6 Host** on page 67.

D-Link
DIR-859 HW:V3 FW:1.00

Home | Settings | **Advanced** | Management

Dynamic DNS

Dynamic Domain Name Service (DynDNS) allows your router to associate an easy-to-remember domain name such as [YourDomainName].com with the regularly changing IP address assigned by your Internet Service provider. This feature is helpful when running a virtual server. [Click here for help.](#)

Advanced >> Dynamic DNS Save

Enable Dynamic DNS: ☒ Enabled

Status: Disconnected

Server Address: dyndns.com ▼

Host Name:

User Name:

Password:

Time Out: hours

Status	Host Name	IPv6 Address	Edit	Delete
Add Record Remaining: 10				

COPYRIGHT © 2013 D-Link

IPv6 Host

The IPv6 host settings are found at the bottom of the Dynamic DNS page.

If you wish to remove a rule, click on its trash can icon in the Delete column. If you wish to edit a rule, click on its pencil icon in the Edit column. If you wish to create a new rule, click the **Add Rules** button. Click **Save** when you are done. If you edit or create a rule, the following options will appear:

Host Name: Enter the host name that you registered with your dynamic DNS service provider.

IPv6 Address: Enter the IPv6 address of the dynamic DNS server. Alternatively, select the server device in the drop-down menu.

Click **OK** when you are done.

Status	Host Name	IPv6 Address	Edit	Delete
Add Record Remaining: 10				
COPYRIGHT © 2013 D-Link				

Create New Record

Host Name:

IPv6 Address: << Computer Name

Apply

Management

Time & Schedule

Time

The Time page allows you to configure, update, and maintain the correct time on the internal system clock. From here you can set the time zone, the Network Time Protocol (NTP) server, and enable or disable daylight saving time.

In the Management menu on the bar on the top of the page, click **Time & Schedule**.

Time Zone: Select your time zone from the drop-down menu.

Time: Displays the current date and time of the router.

Daylight Saving: Enable or disable daylight saving time.

Update Time Using an NTP Server: Enable or disable to allow an NTP server on the Internet to synchronize the time and date with your router. If you enable this option, select an NTP server from the drop-down menu. To configure the router's time and date manually, disable this option and use the drop-down menus that appear to input the time and date.

Click **Save** when you are done.

To configure and manage your schedules, click **Schedule** and refer to page 69.

The screenshot shows the D-Link DIR-859 router's web interface. At the top, there's a navigation bar with 'Home', 'Settings', 'Advanced', and 'Management'. The 'Management' tab is selected. Below the navigation bar, the page title is 'Time'. A clock icon is displayed next to the text: 'Your router's internal clock is used for data logging and schedules for features. The date and time can be synchronized with a public time server on the Internet, or set manually. [Click here for help.](#)'

Below the title, there's a breadcrumb trail: 'Management >> System Time'. To the right of the breadcrumb are two buttons: 'Schedule' and 'Save'. The 'Save' button is highlighted in blue.

The main content area is titled 'Time Configuration'. It contains the following fields:

- Time Zone:** A drop-down menu showing '(GMT-05:00) Eastern Time (US & Canada)'.
- Time:** A text field showing '2014/01/24 03:58:45 AM'.
- Enable Daylight Saving:** A checkbox that is currently unchecked, with the label 'Disabled' next to it.

Below the 'Time Configuration' section, there's another section titled 'Automatic Time Configuration'. It contains the following fields:


- Update Time Using an NTP Server:** A checkbox that is currently checked, with the label 'Enabled' next to it.
- NTP Server:** A text field showing 'D-Link NTP Server' and a drop-down menu showing 'D-Link NTP Server'.

At the bottom of the page, there's a copyright notice: 'COPYRIGHT © 2013 D-Link'.

Schedule

Some configuration rules can be set according to a pre-configured schedule. To create, edit, or delete schedules, from the Time page click **Schedule**. To return to the Time page, click **Time**.

If you wish to remove a rule, click on its trash can icon in the Delete column. If you wish to edit a rule, click on its pencil icon in the Edit column. If you wish to create a new rule, click the **Add Rules** button. Click **Save** when you are done. If you edit or create a rule, the following screen will appear:

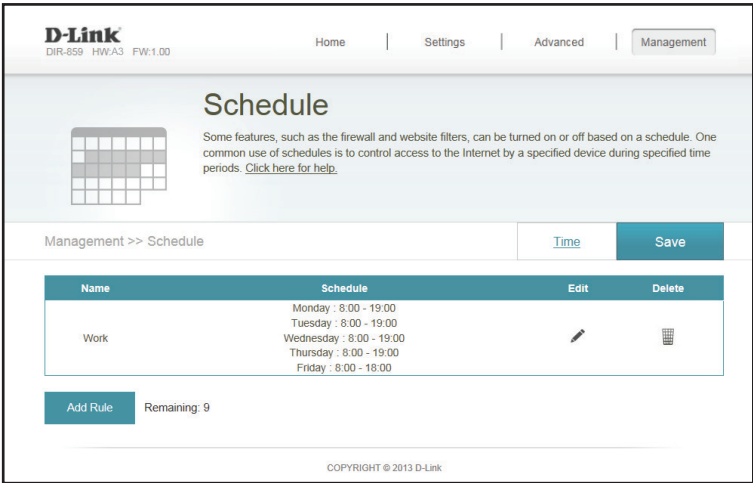


First, enter the name of your schedule in the **Name** field.

Each box represents one hour, with the time at the top of each column. To add a time period to the schedule, simply click on the start hour and drag to the end hour. You can add multiple days to the schedule, but only one period per day.

To remove a time period from the schedule, click on the cross icon.

Click **OK** when you are done.

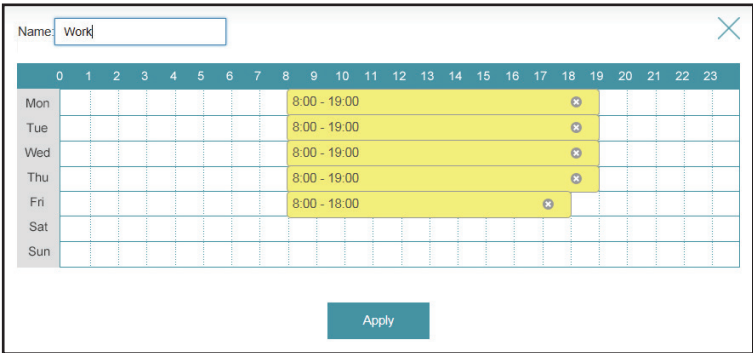

System Log

The router keeps a running log of events. This log can be sent to a Syslog server, and sent to your email address. In the Management menu on the bar on the top of the page, click **System Log**.

Enable Logging to Syslog Server: Check this box to send the router logs to a SysLog Server. If this is disabled, there will be no other options on this page.

Syslog Server IP Address: Enter the IP address for the Syslog server. If the Syslog server is connected to the router, select it from the drop-down menu to automatically populate the field.

Enable Email Notification: If you want the logs to be automatically sent to an email address, enable this option.

Enter the settings for your email account. These are obtained from your email service provider.

Send When Log Full: If email notification is enabled, this option will set the router to send the log by email when the log is fully.

Send On Schedule: This option can be enabled to send an email according to a pre-configured schedule. See below.

Schedule: If **Send On Schedule** is enabled, use the drop-down menu to select the time schedule that the rule will be enabled on. The schedule may be set to **Always Enable**, or you can create your own schedules in the **Schedules** section (refer to page 69).

Click **Save** when you are done.

D-Link
DIR-859 HW: A3 FW: 1.00

Home | Settings | Advanced | Management

System Log

On-board diagnostics run continually in the background to monitor the health of your router. The results are recorded in the system log if it is enabled. This info can be used to diagnose common problems or help Customer Support resolve issues more quickly. [Click here for help.](#)

Management >> System Log Save

SysLog Settings

Enable Logging to Syslog Server: ☒ Enabled

SysLog Server IP Address: << Computer Name

E-mail Settings

Enable E-mail Notification: ☒ Enabled

From E-mail Address:

To E-mail Address:

SMTP Server Address:

SMTP Server Port:

Enable Authentication: ☒ Enabled

Account Name:

Password:

E-mail Log When Full or On Schedule

Send When Log Full:

Send on Schedule:

COPYRIGHT © 2013 D-Link

Admin

This page will allow you to change the administrator (Admin) password and enable remote management.

In the Management menu on the bar on the top of the page, click **Admin**.

Password: Enter a new password for the administrator account. You will need to enter this password whenever you configure the router using a web browser.

Enable Graphical Authentication (CAPTCHA): Enables a challenge-response test to require users to type letters or numbers from a distorted image displayed on the screen to prevent online hackers and unauthorized users from gaining access to your router's network settings.

Enable HTTPS Server: Check to enable HTTPS to connect to the router securely. This means to connect to the router, you must enter **https://192.168.0.1** instead of **http://192.168.0.1**.

Enable Remote Management: Remote management allows the DIR-859 to be configured from the Internet by a web browser. A password is still required to access the web management interface.

Remote Admin Port: The port number used to access the DIR-859 is used in the URL. Example: **Port: http://x.x.x.x:8080** where x.x.x.x is the Internet IP address of the DIR-859 and 8080 is the port used for the web management interface. If you enable **HTTPS Server**, you must enter **https://** as part of the URL to access the router remotely.

Click **Save** when you are done.

To load, save, or reset settings, or reboot the router, click **System** and refer to **System** on page 72.

The screenshot shows the D-Link DIR-859 web management interface. At the top, there's a navigation bar with 'Home', 'Settings', 'Advanced', and 'Management' tabs. The 'Management' tab is active. Below the navigation bar, the page title is 'Admin'. A key icon is shown next to the title. A message states: 'The admin account can change all router settings, while other user accounts can only view some settings. To keep your router secure, you should give the admin account a strong password. [Click here for help.](#)' Below this, there's a 'Management >> Admin' breadcrumb and a 'System' button. The main content area is divided into two sections: 'Admin Password' and 'Administration'. In the 'Admin Password' section, there's a 'Password' field with a masked password '.....' and a checkbox for 'Enable Graphical Authentication (CAPTCHA)' which is currently 'Disabled'. There's a link for 'Advanced Settings...' to the right. In the 'Administration' section, there are three settings: 'Enable HTTPS Server' (checked/Enabled), 'Enable Remote Management' (unchecked/Disabled), and 'Remote Admin Port' (empty field). There's also a 'Use HTTPS' checkbox which is 'Disabled'. At the bottom, there's a 'Save' button and a copyright notice 'COPYRIGHT © 2013 D-Link'.

System

This page allows you to save the router's current configuration, load a previously saved configuration, reset the router to its factory default settings, or reboot the router.

From the Admin page click **System**. To return to the Admin page, click **Admin**.


Save Settings To Local Hard Drive: This option will save the current router configuration settings to a file on your computer.

Load Settings From Local Hard Drive: This option will load previously saved router configuration file. This will overwrite the router's current configuration.

Restore To Factory Default Settings: This option will restore all configuration settings back to the settings that were in effect at the time the router was shipped from the factory. Any settings that have not been saved will be lost, including any rules that you have created. If you want to save the current router configuration settings, use the **Save Settings To Local Hard Drive** button above.

Reboot The Device: Click to reboot the router.

Click **Save** when you are done.

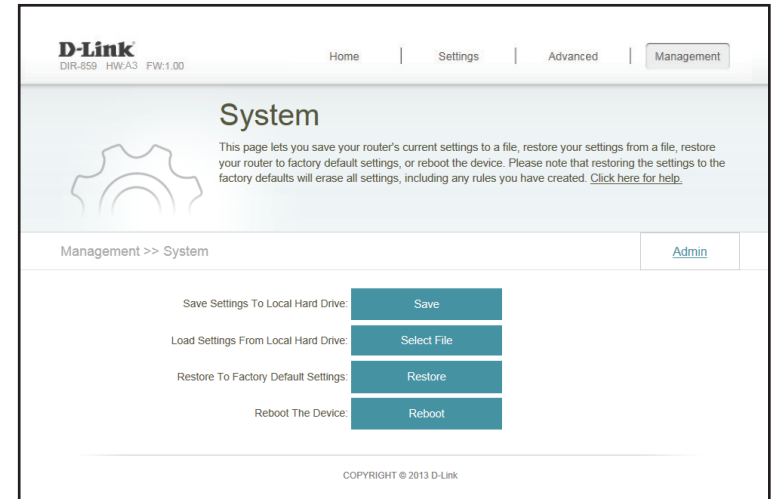

Upgrade


This page will allow you to upgrade the router's firmware or language pack, either automatically or manually. To manually upgrade the firmware or language pack, you must first download the relevant file from <http://support.dlink.com>.

In the Management menu on the bar on the top of the page, click **Upgrade**.

Firmware Information: The current firmware's version and date will be displayed.

Check for New Firmware: Click this button to prompt the router to automatically check for a new firmware version. If a newer version is found, it will prompt you to install it.

Upgrade Firmware: If you wish to upgrade manually, first download the firmware file you wish to upgrade to. Next, click the **Upgrade Firmware** button and browse to the file to install the new firmware. You can also browse to a language pack file to install a new language pack.

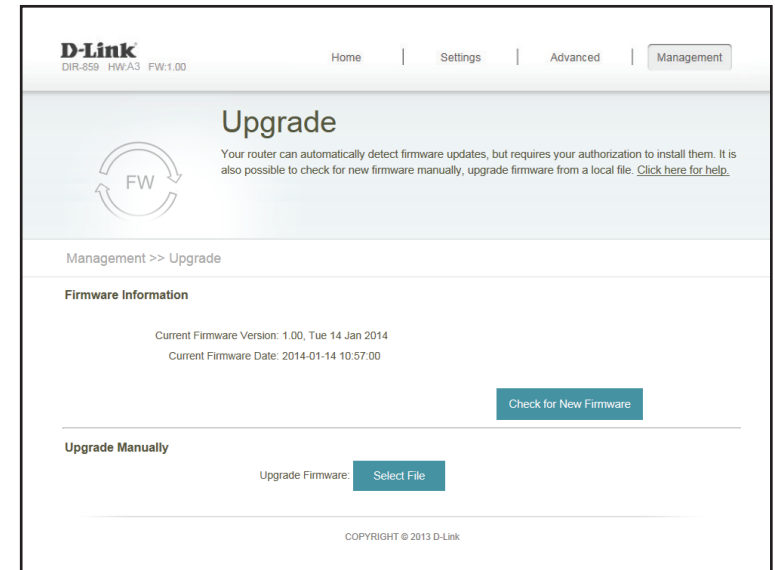


Statistics

On the Statistics page you can view the amount of packets that pass through the router on the WAN, LAN, and wireless segments.

In the Management menu on the bar on the top of the page, click **Statistics**.

You can view the **Internet**, **LAN**, **Wi-Fi 2.4 GHz**, or **Wi-Fi 5 GHz** by clicking on the respective tabs at the top. The graph will update in real time. To clear the information on the graph, click **Clear**.

The traffic counter will reset if the device is rebooted.

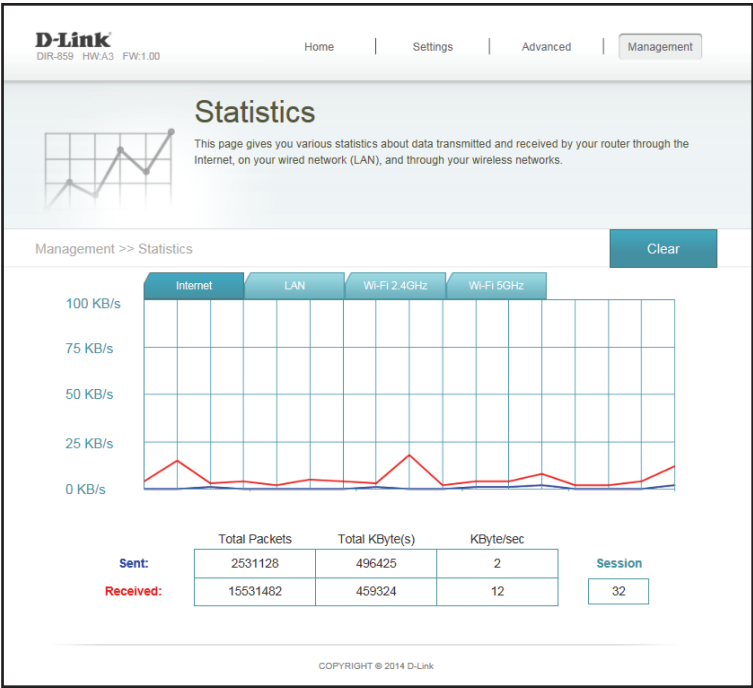

Connect a Wireless Client to your Router

WPS Button

The easiest and most secure way to connect your wireless devices to the router is with WPS (Wi-Fi Protected Setup). Most wireless devices such as wireless adapters, media players, Blu-ray DVD players, wireless printers and cameras will have a WPS button (or a software utility with WPS) that you can press to connect to the DIR-859 router. Please refer to your user manual for the wireless device you want to connect to make sure you understand how to enable WPS. Once you know, follow the steps below:

Step 1 - Press the WPS button on the DIR-859 for about 1 second. The Internet LED on the front will start to blink.



Step 2 - Within 2 minutes, press the WPS button on your wireless client (or launch the software utility and start the WPS process).

Step 3 - Allow up to 1 minute for your connection to be configured. Once the Internet light stops blinking, you will be connected and your wireless connection will be secure with WPA2.

Windows® 8


WPA/WPA2

It is recommended that you enable wireless security (WPA/WPA2) on your wireless router or access point before configuring your wireless adapter. If you are joining an existing network, you will need to know the security key (Wi-Fi password) being used.

To join an existing network, locate the wireless network icon in the taskbar next to the time display.





Clicking on this icon will display a list of wireless networks that are within connecting proximity of your computer. Select the desired network by clicking on the network name.

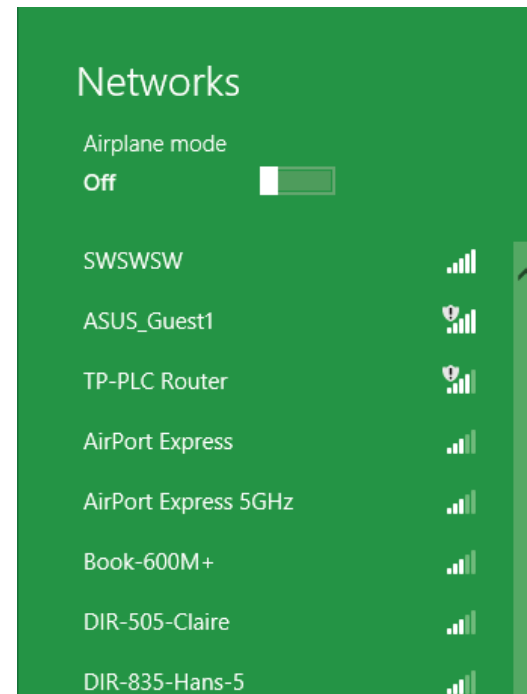

You will then be prompted to enter the network security key (Wi-Fi password) for the wireless network. Enter the password into the box and click **Next**.

If you wish to use Wi-Fi Protected Setup (WPS) to connect to the router, you can also press the WPS button on your router during this step to enable the WPS function.

When you have established a successful connection to a wireless network, the word **Connected** will appear next to the name of the network to which you are connected to.

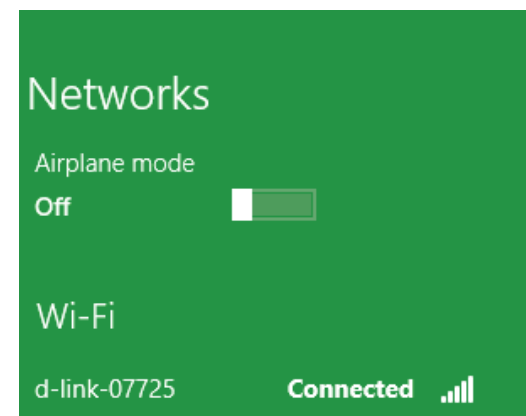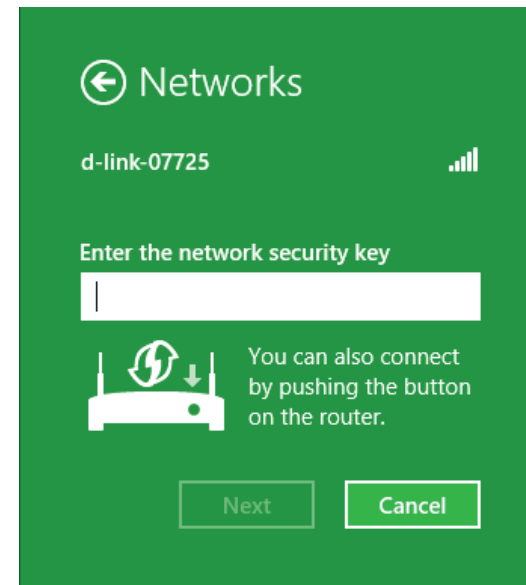


Windows® 7

WPA/WPA2

It is recommended that you enable wireless security (WPA/WPA2) on your wireless router or access point before configuring your wireless adapter. If you are joining an existing network, you will need to know the security key or passphrase being used.

1. Click on the wireless icon in your system tray (lower-right corner).

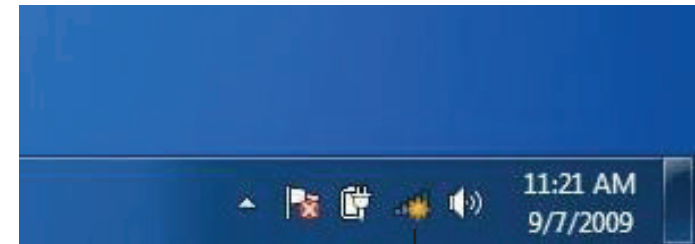

Wireless Icon

2. The utility will display any available wireless networks in your area.




3. Highlight the wireless connection with Wi-Fi name (SSID) you would like to connect to and click the **Connect** button.

If you get a good signal but cannot access the Internet, check your TCP/IP settings for your wireless adapter. Refer to the Networking Basics section in this manual for more information.




4. The following window appears while your computer tries to connect to the router.

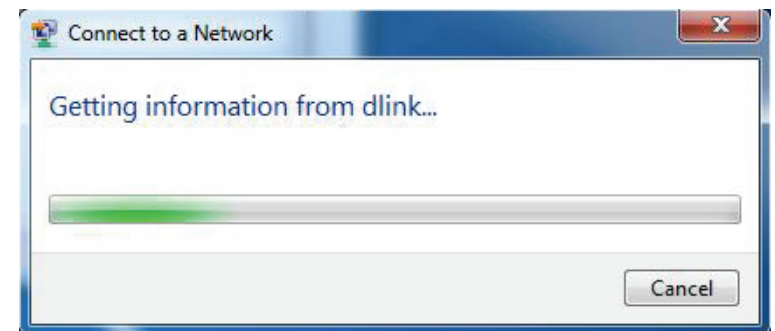

5. Enter the same security key or passphrase (Wi-Fi password) that is on your router and click **Connect**. You can also connect by pushing the WPS button on the router.


It may take 20-30 seconds to connect to the wireless network. If the connection fails, please verify that the security settings are correct. The key or passphrase must be exactly the same as the one on the wireless router.

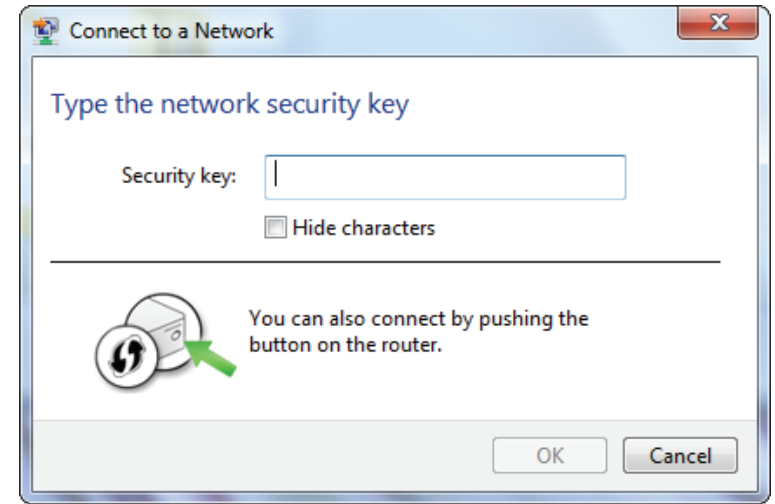


WPS

The WPS feature of the DIR-859 can be configured using Windows® 7. Carry out the following steps to use Windows® 7 to configure the WPS feature:


1. Click the **Start** button and select **Computer** from the Start menu.

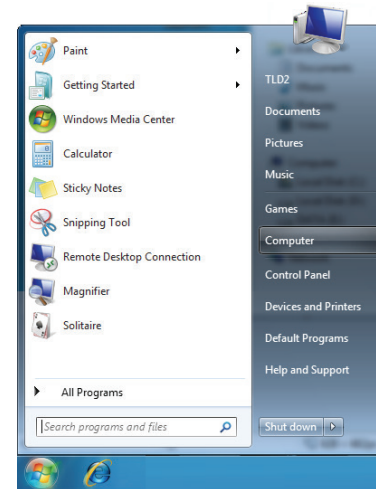


2. Click **Network** on the left side.

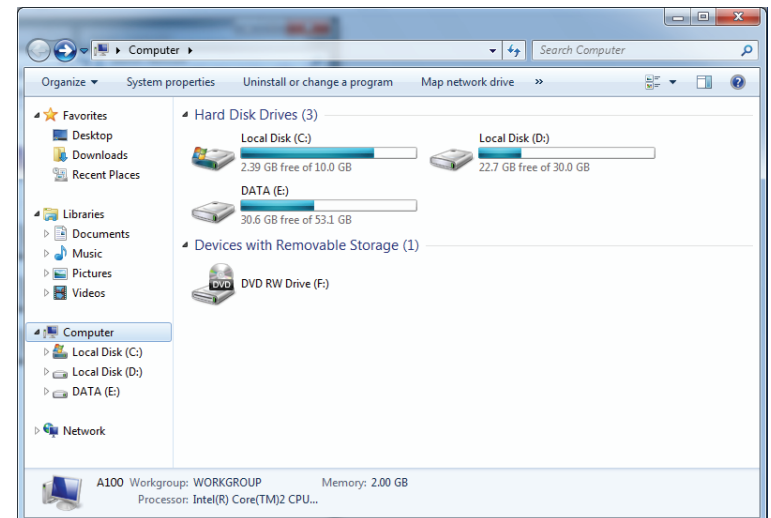


3. Double-click the DIR-859.

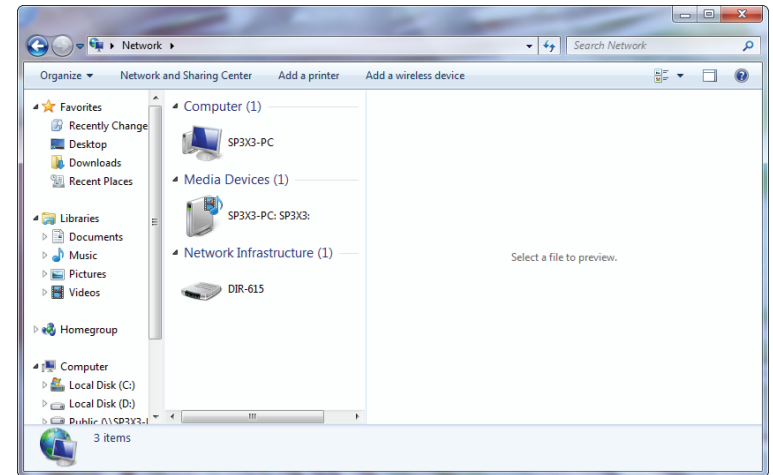


4. Input the WPS PIN number (on the router label) in the **Setup > Wireless Setup** menu in the router's web UI) and click **Next**.

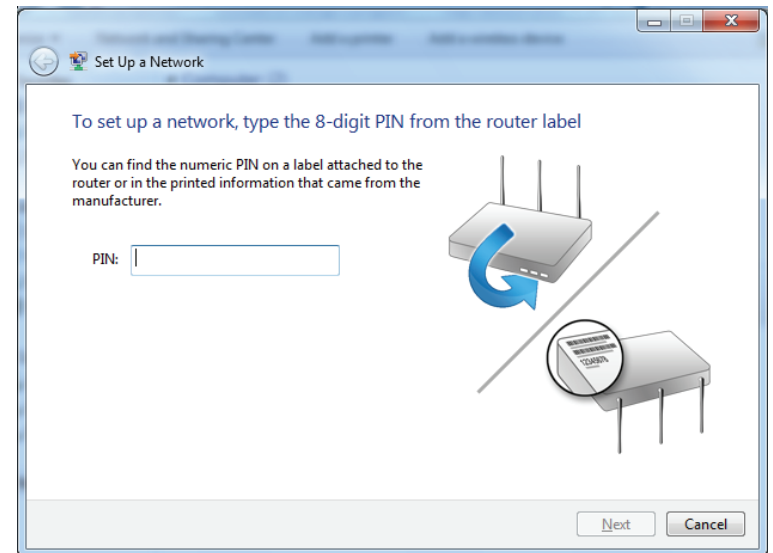


5. Type a name to identify the network.

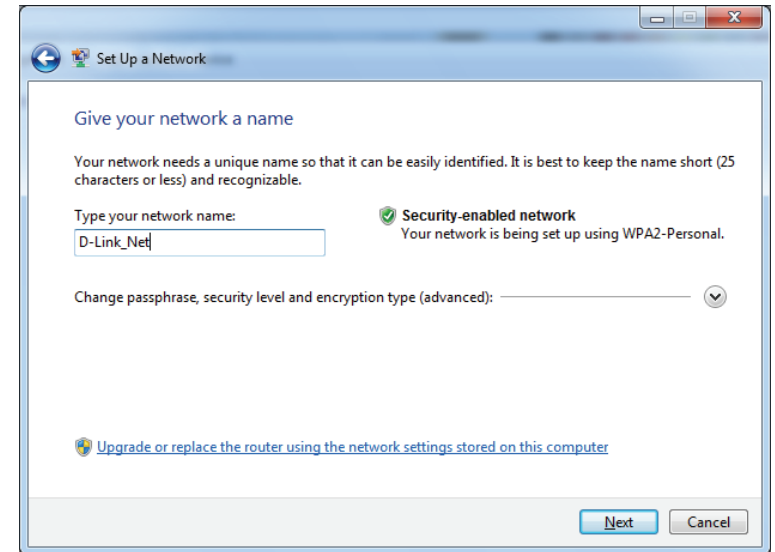


6. To configure advanced settings, click the  icon.

Click **Next** to continue.

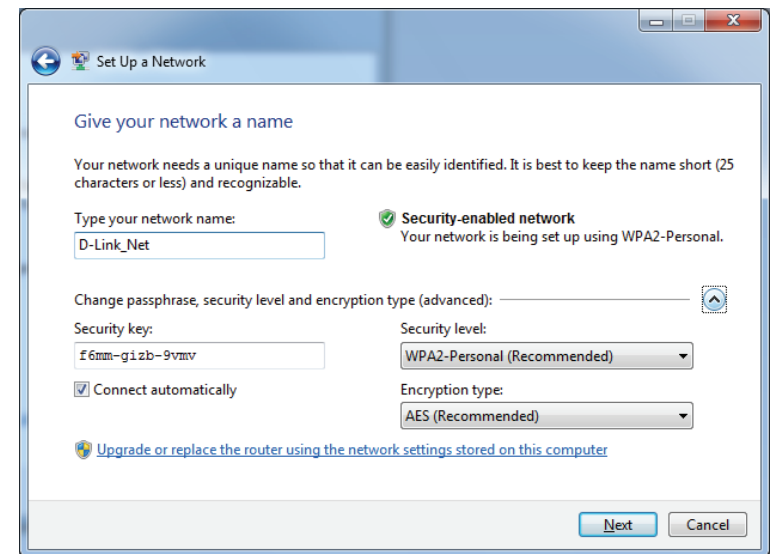

7. The following window appears while the Router is being configured.


Wait for the configuration to complete.

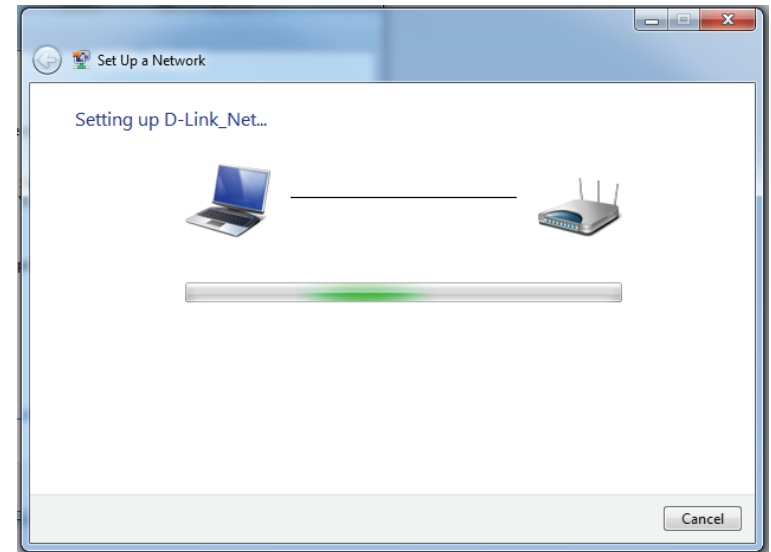

8. The following window informs you that WPS on the router has been set up successfully.

Make a note of the security key as you may need to provide this security key if adding an older wireless device to the network in the future.

9. Click **Close** to complete WPS setup.

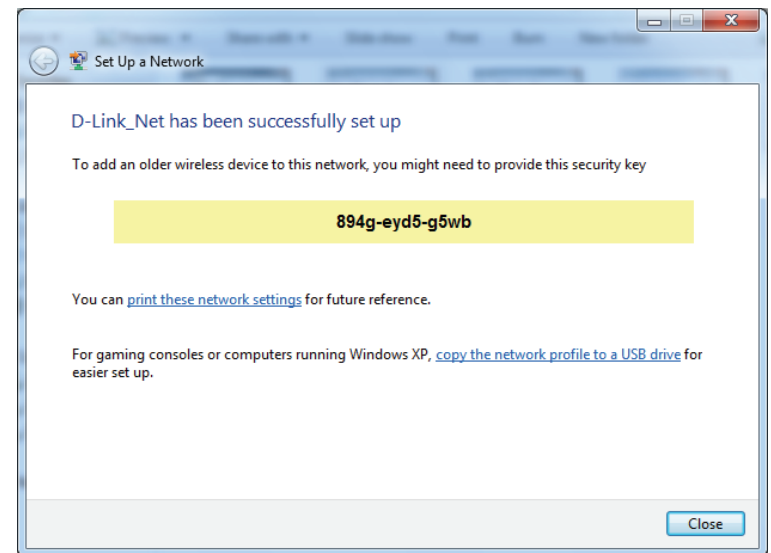

Windows Vista®

Windows Vista® users may use the built-in wireless utility. If you are using another company's wireless utility, please refer to the user manual of your wireless adapter for help connecting to a wireless network. Most wireless utilities will have a "site survey" option similar to the Windows Vista® utility as seen below.

If you receive the **Wireless Networks Detected** bubble, click on the center of the bubble to access the utility.


or

Right-click on the wireless computer icon in your system tray (lower-right corner next to the time). Select **Connect to a network**.



The utility will display any available wireless networks in your area. Click on a network (displayed using the SSID) and click the **Connect** button.


If you get a good signal but cannot access the Internet, check you TCP/IP settings for your wireless adapter. Refer to the **Networking Basics** section in this manual for more information.

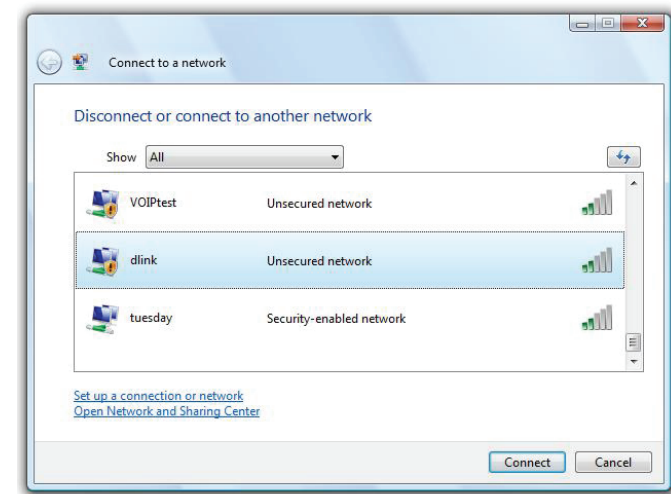


WPA/WPA2

It is recommended that you enable wireless security (WPA/WPA2) on your wireless router or access point before configuring your wireless adapter. If you are joining an existing network, you will need to know the security key or passphrase being used.

1. Open the Windows Vista® Wireless Utility by right-clicking on the wireless computer icon in your system tray (lower right corner of screen). Select **Connect to a network**.

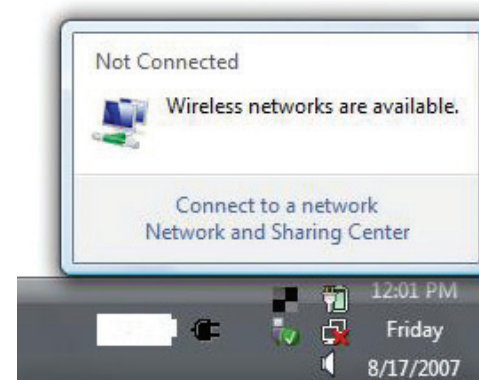


2. Highlight the Wi-Fi name (SSID) you would like to connect to and click **Connect**.

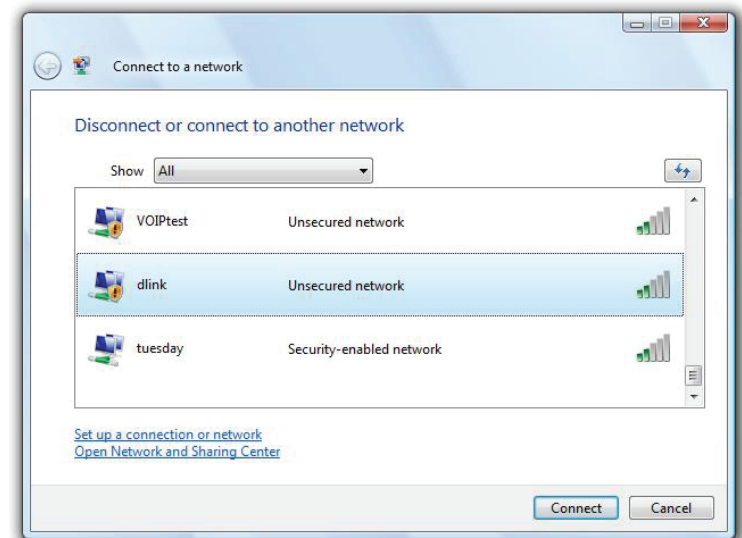

3. Enter the same security key or passphrase (Wi-Fi password) that is on your router and click **Connect**.

It may take 20-30 seconds to connect to the wireless network. If the connection fails, please verify that the security settings are correct. The key or passphrase must be exactly the same as the one on the wireless router.

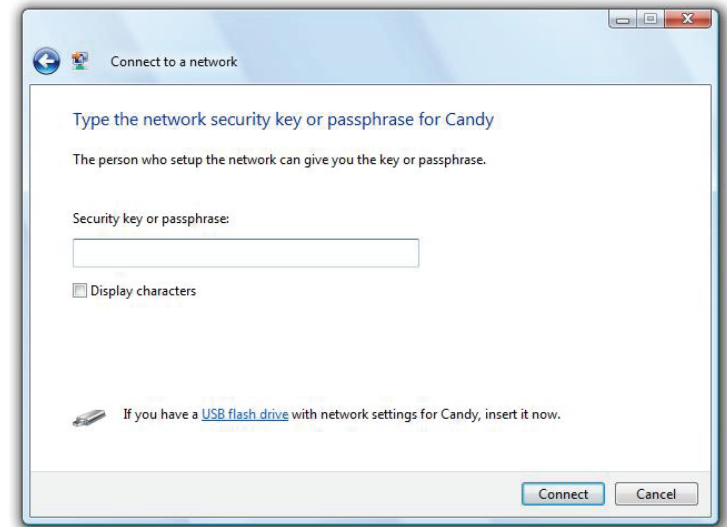

Windows® XP

Windows® XP users may use the built-in wireless utility (Zero Configuration Utility). The following instructions are for Service Pack 2 users. If you are using another company's utility, please refer to the user manual of your wireless adapter for help with connecting to a wireless network. Most utilities will have a "site survey" option similar to the Windows® XP utility as seen below.



If you receive the **Wireless Networks Detected** bubble, click on the center of the bubble to access the utility.

or

Right-click on the wireless computer icon in your system tray (lower-right corner next to the time). Select **View Available Wireless Networks**.

The utility will display any available wireless networks in your area. Click on a Wi-Fi network (displayed using the SSID) and click the **Connect** button.



If you get a good signal but cannot access the Internet, check you TCP/IP settings for your wireless adapter. Refer to the **Networking Basics** section in this manual for more information.

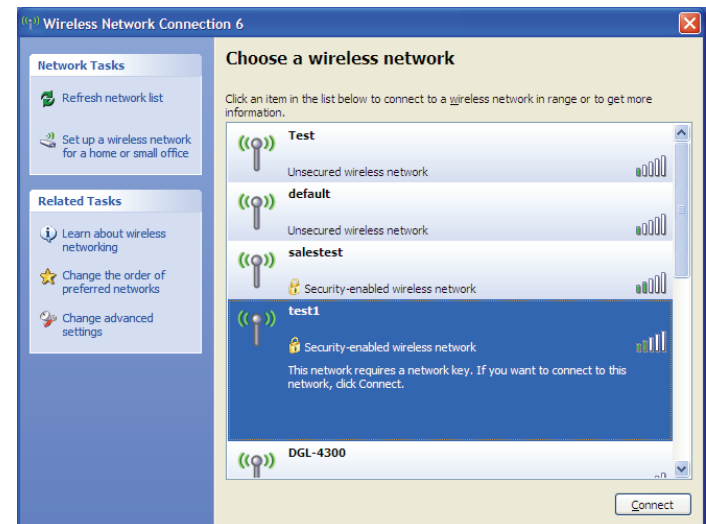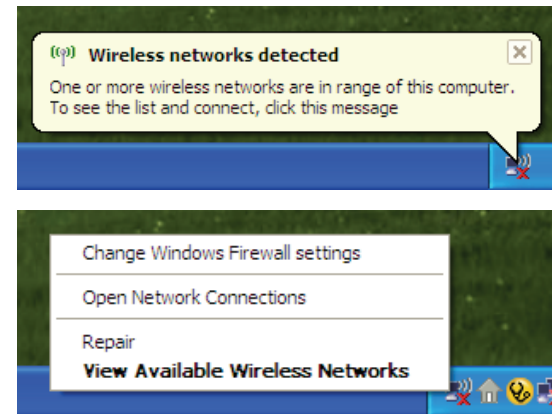

WPA/WPA2


It is recommended to enable WPA on your wireless router or access point before configuring your wireless adapter. If you are joining an existing network, you will need to know the WPA key being used.

1. Open the Windows® XP Wireless Utility by right-clicking on the wireless computer icon in your system tray (lower-right corner of screen). Select **View Available Wireless Networks**.
2. Highlight the Wi-Fi network (SSID) you would like to connect to and click **Connect**.

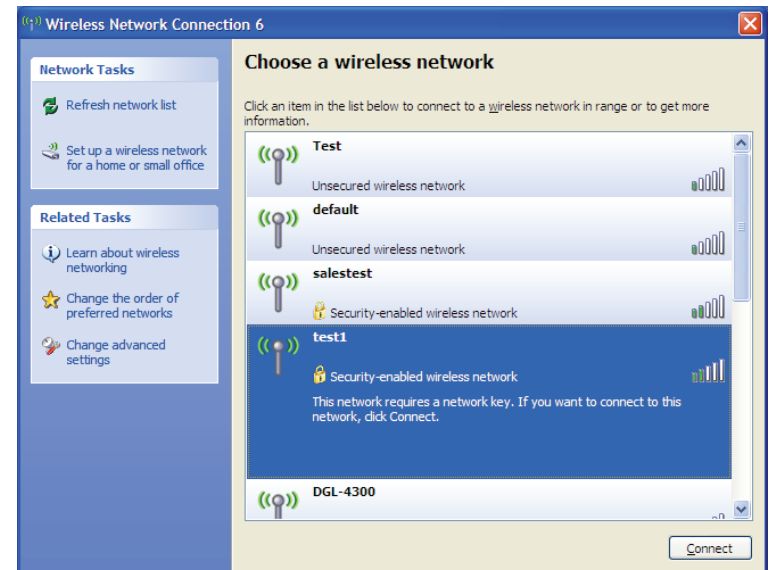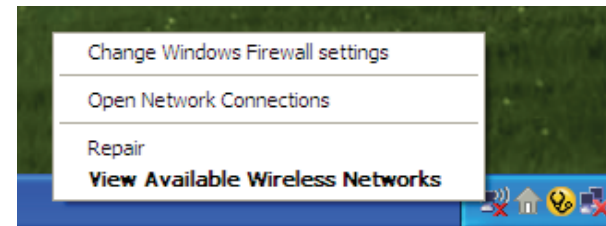

3. The **Wireless Network Connection** box will appear. Enter the WPA-PSK Wi-Fi password and click **Connect**.

It may take 20-30 seconds to connect to the wireless network. If the connection fails, please verify that the WPA-PSK settings are correct. The Wi-Fi password must be exactly the same as on the wireless router.

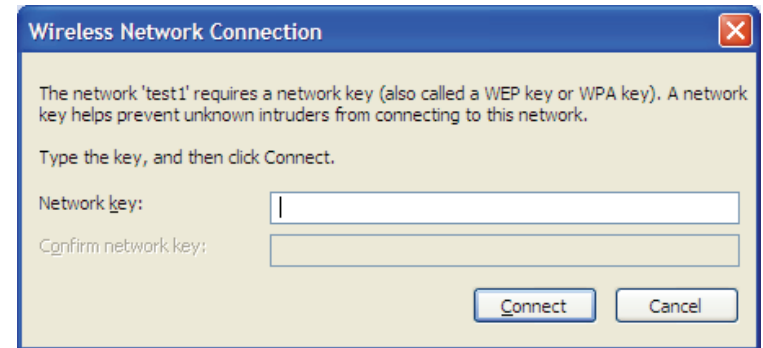

Troubleshooting

This chapter provides solutions to problems that can occur during the installation and operation of the DIR-859. Read the following descriptions if you are having problems. The examples below are illustrated in Windows® XP. If you have a different operating system, the screenshots on your computer will look similar to these examples.

1. Why can't I access the web-based configuration utility?

When entering the IP address of the D-Link router (**192.168.0.1** for example), you are not connecting to a website, nor do you have to be connected to the Internet. The device has the utility built-in to a ROM chip in the device itself. Your computer must be on the same IP subnet to connect to the web-based utility.

- Make sure you have an updated Java-enabled web browser. We recommend the following:
 - Microsoft Internet Explorer® 9 or higher
 - Mozilla Firefox® 20 or higher
 - Google™ Chrome 25 or higher
 - Apple Safari 5.1 or higher
- Verify physical connectivity by checking for solid link lights on the device. If you do not get a solid link light, try using a different cable, or connect to a different port on the device if possible. If the computer is turned off, the link light may not be on.
- Disable any Internet security software running on the computer. Software firewalls such as ZoneAlarm, BlackICE, Sygate, Norton Personal Firewall, and Windows® XP firewall may block access to the configuration pages. Check the help files included with your firewall software for more information on disabling or configuring it.

- Configure your Internet settings:
 - Go to **Start > Settings > Control Panel**. Double-click the **Internet Options** icon. From the **Security** tab, click the button to restore the settings to their defaults.
 - Click the **Connection** tab and set the dial-up option to Never Dial a Connection. Click the LAN Settings button. Make sure nothing is checked. Click **OK**.
 - Go to the **Advanced** tab and click the button to restore these settings to their defaults. Click **OK** three times.
 - Close your web browser (if open) and open it.
- Access the web management. Open your web browser and enter the IP address of your D-Link router in the address bar. This should open the login page for your web management.
- If you still cannot access the configuration, unplug the power to the router for 10 seconds and plug back in. Wait about 30 seconds and try accessing the configuration. If you have multiple computers, try connecting using a different computer.

2. What can I do if I forgot my password?

If you forgot your password, you must reset your router. This process will change all your settings back to the factory defaults.

To reset the router, locate the reset button (hole) on the rear panel of the unit. With the router powered on, use a paperclip to hold the button down for 10 seconds. Release the button and the router will go through its reboot process. Wait about 30 seconds to access the router. The default IP address is **192.168.0.1**. When logging in, leave the password box empty.

3. Why can't I connect to certain sites or send and receive emails when connecting through my router?

If you are having a problem sending or receiving email, or connecting to secure sites such as eBay, banking sites, and Hotmail, we suggest lowering the MTU in increments of ten (Ex. 1492, 1482, 1472, etc).

To find the proper MTU Size, you'll have to do a special ping of the destination you're trying to go to. A destination could be another computer, or a URL.

- Click on **Start** and then click **Run**.
- Windows® 95, 98, and Me users type in **command** (Windows® NT, 2000, XP, Vista®, and 7 users type in **cmd**) and press **Enter** (or click **OK**).
- Once the window opens, you'll need to do a special ping. Use the following syntax:

ping [url] [-f] [-l] [MTU value]

Example: **ping yahoo.com -f -l 1472**

```
C:\>ping yahoo.com -f -l 1482
Pinging yahoo.com [66.94.234.13] with 1482 bytes of data:
Packet needs to be fragmented but DF set.
Packet needs to be fragmented but DF set.
Packet needs to be fragmented but DF set.
Packet needs to be fragmented but DF set.

Ping statistics for 66.94.234.13:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping yahoo.com -f -l 1472
Pinging yahoo.com [66.94.234.13] with 1472 bytes of data:
Reply from 66.94.234.13: bytes=1472 time=93ms TTL=52
Reply from 66.94.234.13: bytes=1472 time=109ms TTL=52
Reply from 66.94.234.13: bytes=1472 time=125ms TTL=52
Reply from 66.94.234.13: bytes=1472 time=203ms TTL=52

Ping statistics for 66.94.234.13:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 93ms, Maximum = 203ms, Average = 132ms

C:\>
```

You should start at 1472 and work your way down by 10 each time. Once you get a reply, go up by 2 until you get a fragmented packet. Take that value and add 28 to the value to account for the various TCP/IP headers. For example, let's say that 1452 was the proper value, the actual MTU size would be 1480, which is the optimum for the network we're working with ($1452+28=1480$).

Once you find your MTU, you can now configure your router with the proper MTU size.

To change the MTU rate on your router follow the steps below:

- Open your browser, enter the IP address of your router (192.168.0.1) and click **OK**.
- Enter your username (admin) and password (blank by default). Click **OK** to enter the web configuration page for the device.
- Click on **Setup** and then click **Manual Configure**.
- To change the MTU, enter the number in the MTU field and click **Save Settings** to save your settings.
- Test your email. If changing the MTU does not resolve the problem, continue changing the MTU in increments of ten.

Wireless Basics

D-Link wireless products are based on industry standards to provide easy-to-use and compatible high-speed wireless connectivity within your home, business, or public access wireless networks. Strictly adhering to the IEEE standard, the D-Link wireless family of products will allow you to securely access the data you want, when, and where you want it. You will be able to enjoy the freedom that wireless networking delivers.

A wireless local area network (WLAN) is a cellular computer network that transmits and receives data with radio signals instead of wires. Wireless LANs are used increasingly in both home and office environments, and public areas such as airports, coffee shops and universities. Innovative ways to utilize WLAN technology are helping people work, and communicate more efficiently. Increased mobility and the absence of cabling and other fixed infrastructure have proven to be beneficial for many users.

Wireless users can use the same applications they use on a wired network. Wireless adapter cards used on laptop and desktop systems support the same protocols as Ethernet adapter cards.

Under many circumstances, it may be desirable for mobile network devices to link to a conventional Ethernet LAN in order to use servers, printers or an Internet connection supplied through the wired LAN. A Wireless Router is a device used to provide this link.

What is Wireless?

Wireless or Wi-Fi technology is another way of connecting your computer to the network without using wires. Wi-Fi uses radio frequency to connect wirelessly so you have the freedom to connect computers anywhere in your home or office network.

Why D-Link Wireless?

D-Link is the worldwide leader and award winning designer, developer, and manufacturer of networking products. D-Link delivers the performance you need at a price you can afford. D-Link has all the products you need to build your network.

How does wireless work?

Wireless works similarly to how cordless phones work, through radio signals that transmit data from one point A to point B. But wireless technology has restrictions as to how you can access the network. You must be within the wireless network range area to be able to connect your computer. There are two different types of wireless networks: Wireless Local Area Network (WLAN), and Wireless Personal Area Network (WPAN).

Wireless Local Area Network (WLAN)

In a wireless local area network, a device called an Access Point (AP) connects computers to the network. The access point has a small antenna attached to it, which allows it to transmit data back and forth over radio signals. With an indoor access point the signal can travel up to 300 feet. With an outdoor access point the signal can reach out up to 30 miles to serve places like manufacturing plants, industrial locations, university and high school campuses, airports, golf courses, and many other outdoor venues.

Wireless Personal Area Network (WPAN)

Bluetooth is the industry standard wireless technology used for WPAN. Bluetooth devices in WPAN operate in a range up to 30 feet away.

Compared to WLAN the speed and wireless operation range are both less than WLAN, but in return it doesn't use nearly as much power. This makes it ideal for personal devices, such as mobile phones, PDAs, headphones, laptops, speakers, and other devices that operate on batteries.

Who uses wireless?

Wireless technology has become so popular in recent years that almost everyone is using it, whether it's for home, office, business, D-Link has a wireless solution for it.

Home Uses/Benefits

- Gives everyone at home broadband access
- Surf the web, check email, instant message, etc.
- Gets rid of the cables around the house
- Simple and easy to use

Small Office and Home Office Uses/Benefits

- Stay on top of everything at home as you would at office
- Remotely access your office network from home
- Share Internet connection and printer with multiple computers
- No need to dedicate office space

Where is wireless used?

Wireless technology is expanding everywhere, not just at home or office. People like the freedom of mobility and it's becoming so popular that more and more public facilities now provide wireless access to attract people. The wireless connection in public places is usually called "hotspots".

Using a D-Link CardBus adapter with your laptop, you can access the hotspot to connect to the Internet from remote locations like: airports, hotels, coffee shops, libraries, restaurants, and convention centers.

Wireless network is easy to setup, but if you're installing it for the first time it could be quite a task not knowing where to start. That's why we've put together a few setup steps and tips to help you through the process of setting up a wireless network.

Tips

Here are a few things to keep in mind, when you install a wireless network.

Centralize your router or access point

Make sure you place the router/access point in a centralized location within your network for the best performance. Try to place the router/access point as high as possible in the room, so the signal gets dispersed throughout your home. If you have a two-story home, you may need a repeater to boost the signal to extend the range.

Eliminate interference

Place home appliances such as cordless telephones, microwaves, and televisions as far away as possible from the router/access point. This would significantly reduce any interference that the appliances might cause since they operate on same frequency.

Security

Don't let your next-door neighbors or intruders connect to your wireless network. Secure your wireless network by turning on the WPA or WEP security feature on the router. Refer to the product manual for detail information on how to set it up.

Wireless Modes

There are basically two modes of networking:

- **Infrastructure** – All wireless clients will connect to an access point or wireless router.
- **Ad-Hoc** – Directly connecting to another computer for peer-to-peer communication using wireless network adapters on each computer, such as two or more DIR-859 wireless network Cardbus adapters.

An Infrastructure network contains an access point or wireless router. All the wireless devices, or clients, will connect to the wireless router or access point.

An Ad-Hoc network contains only clients, such as laptops with wireless cardbus adapters. All the adapters must be in Ad-Hoc mode to communicate.

Networking Basics

Check your IP address


After you install your new D-Link adapter, by default, the TCP/IP settings should be set to obtain an IP address from a DHCP server (i.e. wireless router) automatically. To verify your IP address, please follow the steps below.

Click on **Start > Run**. In the run box type **cmd** and click **OK**. (Windows® 7/Vista® users type **cmd** in the **Start Search** box.)

At the prompt, type **ipconfig** and press **Enter**.

This will display the IP address, subnet mask, and the default gateway of your adapter.

If the address is 0.0.0.0, check your adapter installation, security settings, and the settings on your router. Some firewall software programs may block a DHCP request on newly installed adapters.

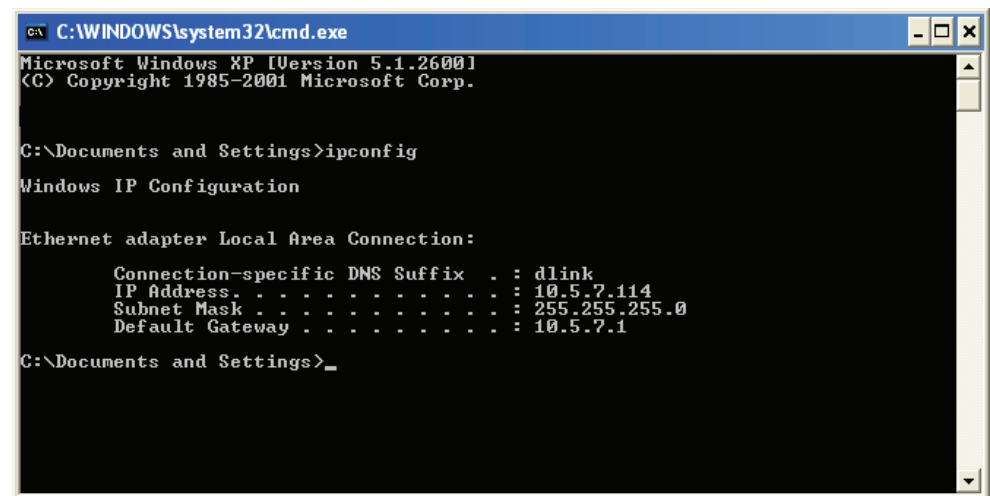

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : dlink
    IP Address. . . . . : 10.5.7.114
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 10.5.7.1

C:\Documents and Settings>
```


Statically Assign an IP address

If you are not using a DHCP capable gateway/router, or you need to assign a static IP address, please follow the steps below:

Step 1

- Windows® 7 - Click on **Start > Control Panel > Network and Internet > Network and Sharing Center**.
- Windows Vista® - Click on **Start > Control Panel > Network and Internet > Network and Sharing Center > Manage Network Connections**.
- Windows® XP - Click on **Start > Control Panel > Network Connections**.
- Windows® 2000 - From the desktop, right-click **My Network Places > Properties**.

Step 2

Right-click on the **Local Area Connection** which represents your network adapter and select **Properties**.

Step 3

Highlight **Internet Protocol (TCP/IP)** and click **Properties**.

Step 4


Click **Use the following IP address** and enter an IP address that is on the same subnet as your network or the LAN IP address on your router.

Example: If the router's LAN IP address is 192.168.0.1, make your IP address 192.168.0.X where X is a number between 2 and 99. Make sure that the number you choose is not in use on the network. Set the Default Gateway the same as the LAN IP address of your router (I.E. 192.168.0.1).

Set Primary DNS the same as the LAN IP address of your router (192.168.0.1). The Secondary DNS is not needed or you may enter a DNS server from your ISP.

Step 5

Click **OK** twice to save your settings.

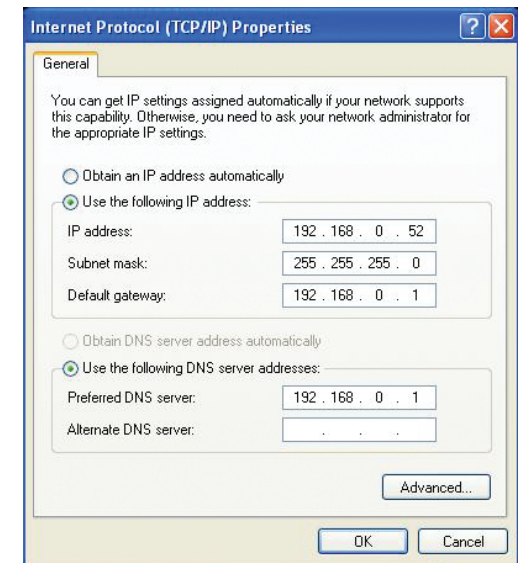

Wireless Security

This section will show you the different levels of security you can use to protect your data from intruders. The DIR-859 offers the following types of security:

- WPA2 (Wi-Fi Protected Access 2)
- WPA (Wi-Fi Protected Access)
- WPA2-PSK (Pre-Shared Key)
- WPA-PSK (Pre-Shared Key)

What is WPA?

WPA (Wi-Fi Protected Access), is a Wi-Fi standard that was designed to improve the security features of WEP (Wired Equivalent Privacy).

The 2 major improvements over WEP:

- Improved data encryption through the Temporal Key Integrity Protocol (TKIP). TKIP scrambles the keys using a hashing algorithm and by adding an integrity-checking feature, ensures that the keys haven't been tampered with. WPA2 is based on 802.11i and uses Advanced Encryption Standard (AES) instead of TKIP.
- User authentication, which is generally missing in WEP, through the extensible authentication protocol (EAP). WEP regulates access to a wireless network based on a computer's hardware-specific MAC address, which is relatively simple to be sniffed out and stolen. EAP is built on a more secure public-key encryption system to ensure that only authorized network users can access the network.

WPA-PSK/WPA2-PSK uses a passphrase or key to authenticate your wireless connection. The key is an alpha-numeric password between 8 and 63 characters long. The password can include symbols (!?*&_) and spaces. This key must be the exact same key entered on your wireless router or access point.

WPA/WPA2 incorporates user authentication through the Extensible Authentication Protocol (EAP). EAP is built on a more secure public key encryption system to ensure that only authorized network users can access the network.

Technical Specifications

Device Interfaces

- 802.11 a/b/g/n/ac wireless LAN
- Four 10/100/1000 Gigabit LAN ports
- 10/100/1000 Gigabit WAN port

Antenna Types

- Three dual-band dipole antennas

Standards

- IEEE 802.11ac
- IEEE 802.11n
- IEEE 802.11g
- IEEE 802.11b
- IEEE 802.11a
- IEEE 802.3
- IEEE 802.3u

Security

- WPA™ - Personal/Enterprise
- WPA2™ - Personal/Enterprise
- Wi-Fi Protected Setup (WPS) PIN/PBC

Power

- Input: 100 to 240 V AC, 50/60 Hz
- Output: 12 V / 1.5 A

Operating Temperature

- 0 to 40 °C (32 to 104 °F)

Humidity

- 95% maximum (non-condensing)

Certifications

- FCC Class B
- CE Class B
- IPv6 Ready
- Wi-Fi Protected Setup (WPS)
- Wi-Fi Multimedia (WMM)
- Compatible with Windows 8

Dimensions

- L = 246.9 mm (9.72 inches)
- W = 190.4 mm (7.50 inches)
- H = 47.2 mm (1.86 inches)

Warranty

- 2 years

Regulatory Information

Caution: Do not remove the plug and connect it to a power outlet by itself; always attach the plug to the power adaptor first before connecting it to a power outlet.

Federal Communication Commission Interference Statement:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Non-modifications Statement:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Caution:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures.

Note:

The country code selection is for non-US model only and is not available to all US model. Per FCC regulation, all Wi-Fi product marketed in US must fixed to US operation channels only.

RF Frequency Requirements:

This device is for indoor use only when using all channels in the 5.150-5.250 GHz, 5.725-5.850 GHz frequency ranges. High power radars are allocated as primary users of the 5.150-5.250 GHz, 5.725-5.850 GHz bands. These radar stations can cause interference with and/or damage this device. This device will not operate on channels which overlap the 5600-5650 MHz band. It is restricted in indoor environments only.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 25 cm between the radiator and your body.

Customer Information:

- (1) This equipment complies with Part 68 of the FCC rules and the requirements adopted by the ACTA. On bottom of this equipment is a label that contains, among other information, a product identifier of 0. If requested, this number must be provided to the telephone company.
- (2) If this equipment 0 causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. But if advance notice isn't practical, the telephone company will notify the customer as soon as possible. Also you will be advised of your right to file a complaint with the FCC if you believe it is necessary.
- (3) The telephone company may make changes in its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens, the telephone company will provide advance notice in order for you to make necessary modification to maintain uninterrupted service.
- (4) If you experience trouble with this equipment, you disconnect it from the network until the problem has been corrected or until you are sure that the equipment is not malfunctioning.
- (5) Please follow instructions for repairing if any (e.g. battery replacement section); otherwise do not alternate or repair any parts of device except specified.
- (6) Connection to party line service is subject to state tariffs. Contact the state public utility commission, public service

commission or corporation commission for information.

(7) If the telephone company requests information on what equipment is connected to their lines, inform them of:

- (a) The telephone number that this unit is connected to,
- (b) The ringer equivalence number 0
- (c) The USOC jack required 0 and
- (d) The FCC Registration Number 0

Items (b) and (d) are indicated on the label. The ringer equivalence number (REN) is used to determine how many devices can be connected to your telephone line. In most areas, the sum of the RENs of all devices on any one line should not exceed five (5.0). If too many devices are attached, they may not ring properly.

(8) If your home has specially wired alarm equipment connected to the telephone line, ensure the installation of this equipment does not disable alarm equipment, consult your telephone company or a qualified installer.

Safety Warning:

CAUTION: Risk of Explosion if Battery is replaced by an Incorrect Type. Dispose of Used Batteries According to the Instructions.

ATTENTION: Risque d'explosion si la batterie est remplacée par un type incorrect. Jetez les piles usagées selon les instructions.

Industry Canada Statement:

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution:

(i) the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

Avertissement:

(i) les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

Radiation Exposure Statement

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

Déclaration d'exposition aux radiations

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Warning

This unit is to be used with a power supply, P/N AMS3-1201500FV , AMS3-1201500FU or WA-18Q12R-ABBE APD-G-1/ APD-K-1.

Avertissement

Cet appareil doit être utilisé avec une source de courant, modèle AMS3-1201500FV , AMS3-1201500FU or WA-18Q12R-ABBE APD-G-1/ APD-K-1.

CAUTION: Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

ATTENTION: Risque d'explosion si la batterie est remplacée par un type incorrect. Jetez les piles usagées selon les instructions.